


3586

Fibre Glast Developments Corporation
385 Carr Drive
Brookville, Ohio 45309
Phone: 800.214.8572
Fax: 937.833.6555
www.fibreglast.com

PTFE Coated Porous Fiberglass

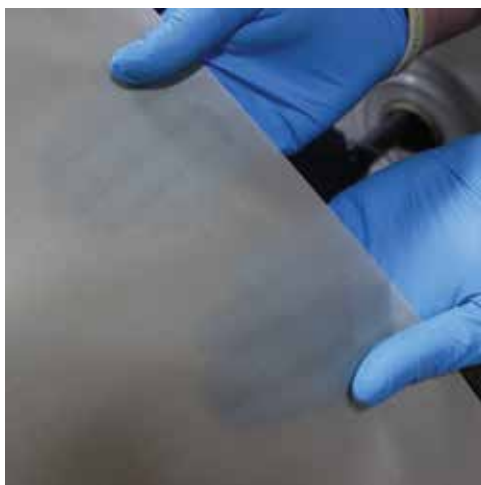

Specific Product Properties	
Coated Weight	1.9 - 2.1 oz/yd ² (51 - 68 GSM)
Weave Pattern	Plain
Air Flow	20 - 80 CFM
Fabric Width	49.75 - 50.25 Inches
Average Thickness	.002 - .003 Inches
Temperature Range	Up to 600°F (315°C)

This is a release fabric for vacuum bagging and infusion, designed to allow resin, volatiles and trapped air to bleed through the release fabric and be absorbed in the bleeder or vented out of the bag.

Previously only in 38" wide, now in 50" wide.