

Configuring User Level DLP

Document Version	1.0.0.2
Last Modified	19-07-2019

Copyright © 2019 Accops Systems Private Limited. All Rights Reserved.

The information contained in this document represents the current view of Accops Systems Pvt. Ltd. on the issues discussed as of the date of publication. Because Accops Systems Pvt. Ltd. must respond to changing market conditions, it should not be interpreted to be a commitment on the part of Accops Systems Pvt. Ltd., and Accops Systems Pvt. Ltd. cannot guarantee the accuracy of any information presented after the date of publication.

This support document is for informational purposes only. Accops Systems Pvt Ltd. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, IN THIS DOCUMENT.

Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording or otherwise) or for any purpose, without the express written permission of Accops Systems Pvt. Ltd.

Accops Support Team

Accops Systems Pvt. Ltd

Email: support@accops.com

Call: +91 2067190100

Audience

Administrators, IT Managers, Support specialists those who are familiar with Accops HySecure and functionalities.

Scope:

To configure the DLP at granular level, follow the steps provided in below document.


Currently Configuring the granular control on user level, prerequisites are:

1. Taking putty of VPN server and inserting entries of userID's for whom you want to Bypass the DLP rules.
2. Requires the HySecure client version to be 5.1.4.7 or above for the settings to be applied.


Steps to Apply DLP on user level

1. Install / Upgrade the **HySecure windows client v. 5.1.4.7** on user machine where you want the Bypass list to work.
2. Make sure that the blocking policy has been applied in HySecure VPN gateway from Client settings.


a. Screenshot block:

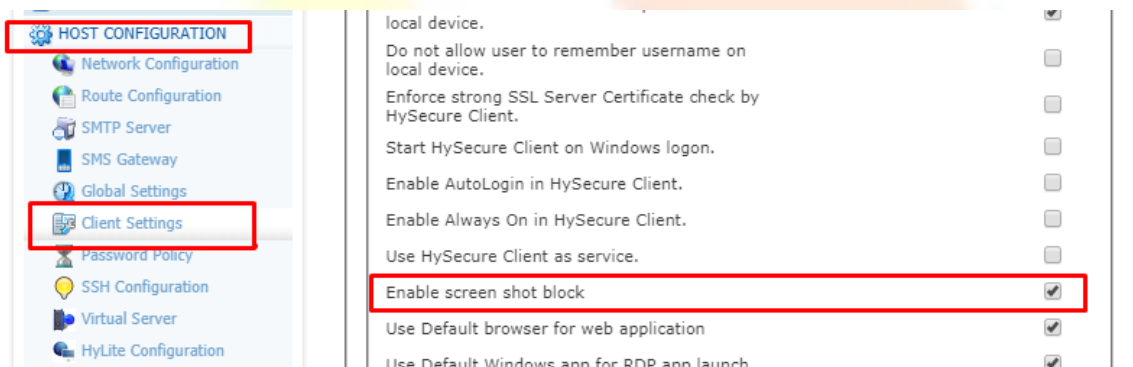


b. Clipboard Block:

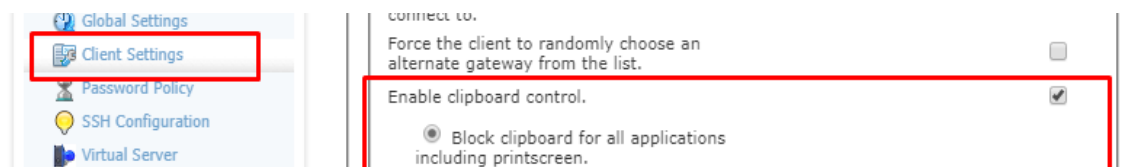


c. USB block:

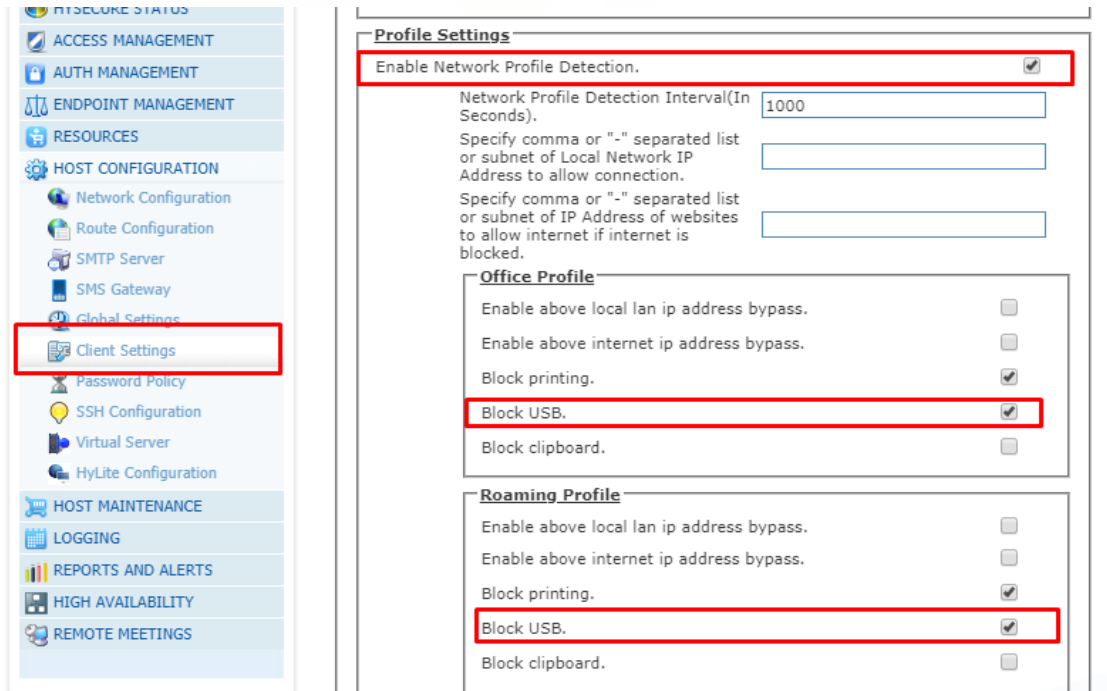

3. Take putty of the Hysecure VPN and login with username and password
 - Password has been shared by Accops team with Disclaimer when user request us when they want to add more users.
4. Type below commands in this:
 - ***sudo nano /home/fes/public/verinfo.js***
 - ***press ctrl+w -> type SECUREDESKTOPBYPASS***

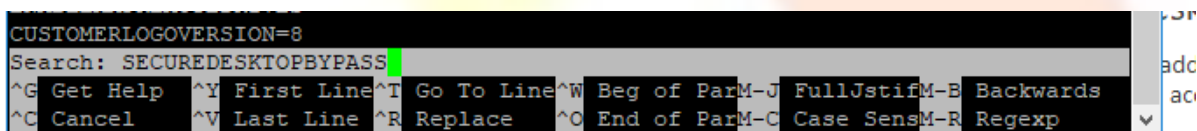

- *Click on enter button* and the cursor will go to SECUREDESKTOPBYPASSUSERLIST as shown in the image:

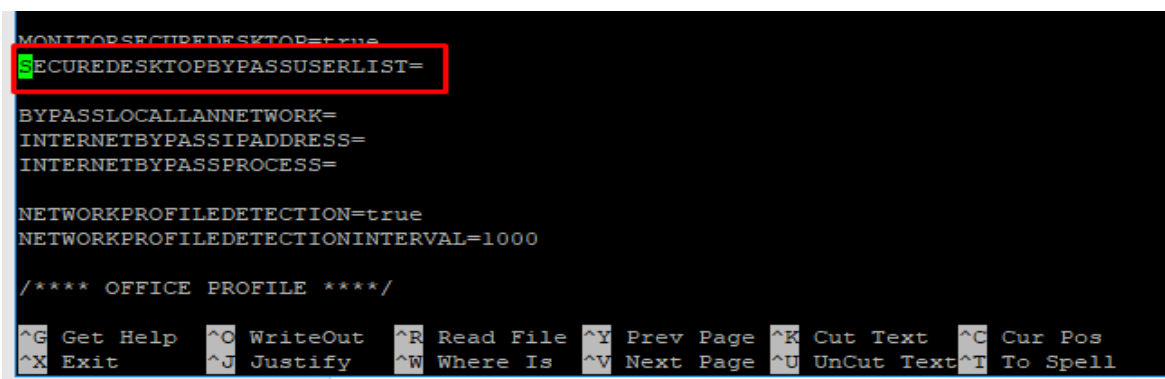

- Type the **logon user names for whom you want to bypass the DLP rule.**

```
MONITORSECUREDESKTOP=true
SECUREDESKTOPBYPASSUSERLIST=user1,user2,user3
BYPASSLOCALLANNETWORK=
INTERNETBYPASSIPADDRESS=
INTERNETBYPASSPROCESS=
NETWORKPROFILEDETECTION=true
NETWORKPROFILEDETECTIONINTERVAL=1000
/**** OFFICE PROFILE ****/
^G Get Help ^O WriteOut ^R Read File ^Y Prev Page ^K Cut Text ^C Cur Pos
^X Exit ^J Justify ^W Where Is ^V Next Page ^U UnCut Text ^T To Spell
```

USER ID for whom you dont want DLP rules to be applied

IMPORTANT NOTES:

- Please separate the usernames with **comma (",")** and make sure there is no comma in the end of userlist.
- This is RISK based settings.
- You can add or remove userID's from this list based on your requirement.
- Make sure if you want this Bypass list to be applied, the Logon user names(USERID) are correct and exact.
- By default no users are in Bypasslist. So, the DLP rule will get applied to all users.
- To save the changes that have been made :

Press Ctrl+O

```
SECUREDESKTOPBYPASSUSERLIST=user1,user2,user3
BYPASSLOCALLANNETWORK=
INTERNETBYPASSIPADDRESS=
INTERNETBYPASSPROCESS=
NETWORKPROFILEDETECTION=true
NETWORKPROFILEDETECTIONINTERVAL=1000
/**** OFFICE PROFILE ****/
File Name to Write: /home/fes/public/verinfo.js
^G Get Help ^M-B DOS Format ^M-A Append ^M-B Backup File
^C Cancel ^M-M Mac Format ^M-P Prepend
```

press enter after you get the prompt for saving the file with filename

- Now **press Ctrl+X** to exit from the file.
- Once all the changes are done.

IMPORTANT NOTES:

- Do not make any changes in the file name to write.
- Make sure you don't make any other changes (such as adding space or enter or any other character on any other location by mistake) in this file or some other functionality of VPN gateway will get affected.

- If unsure, please contact Accops support team for guidance.
 - To exit the **verinfo.js** File without saving changes made, **press ctrl+x** and **type N** so that no changes are saved into the file.
5. For the Bypass settings to be applied, user will have to logoff and login on 5.1.4.7 HySecure client once the gateway side changes are done.

=====END=====

Accops Systems Private Limited, under “Accops” brand is a globally leading developer and provider of Enterprise Mobility solutions involving Application and Desktop Virtualization, Secure Remote Access and Privilege Access Management solutions.

Accops’ s software and hardware products enable businesses to efficiently virtualize, secure and deliver business applications, corporate workspace and network services to their employees, partners, vendors, home users and mobile users, enabling instance access from anywhere using any device.

Accops, HyWorks, HyDesk, HyID, HyLite, HySecure are registered trademarks of Accops Systems Pvt. Ltd. Other names may be trademarks of their respective owners. Accops has the right to change, modify, transfer or otherwise revise the publication without notice.



Tel: India 020-67190100

Email: support@accops.com

Web: support.accops.com

Copyright © 2019, Accops Systems Private Limited.
All Rights Reserved.