

TECHNICAL SPECIFICATION

System Type: 2.4 GHz wireless transmitter/receiver

Camera (including antenna) Art. No. 2005

Operating frequency	2400 – 2483.5 MHz
Maximum output power	20 dBm
Operation temperature	- 20°C to + 60°C
IP classification camera	IP66
Minimum illumination	0 Lux
Night vision range	5 m
Angle of view	120°
Power supply camera	12 V – 32 VDC
Power consumption camera	4.5 W
Size (W x H x D)	10 cm x 8 cm x 9 cm
Weight	397 g

Monitor (including antenna) Art. No. 3011

Operating frequency	2400 – 2483.5 MHz
Operation temperature	- 10°C to + 60°C
Monitor brightness	400 cd/m ²
Monitor resolution	800 x 480
Power supply monitor	6 V–32 VDC
Power consumption monitor	5.3 W
Size (W x H x D)	15 cm x 9 cm x 5.5 cm
Weight	176 g




LUDA FARM

Luda.Farm, Krokslätts fabriker 30, 43137 Mölndal, Sweden


Luda_QIG_machineCamMini_2016_05_19

EXTRA CAMERA

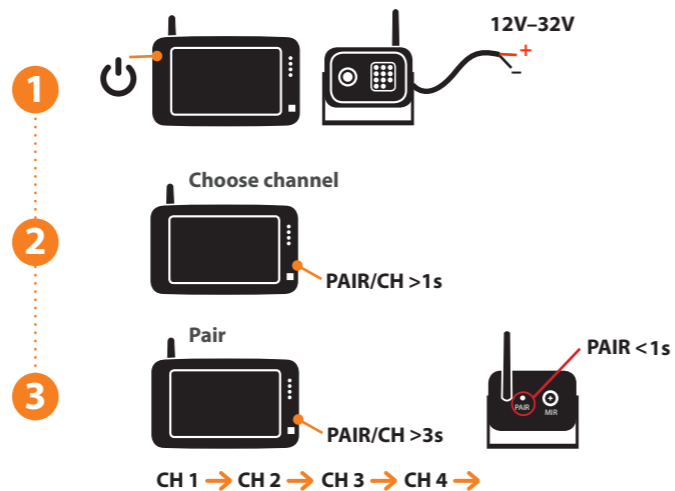

FLEXI PACK X POWER BANK

Available at your local dealer

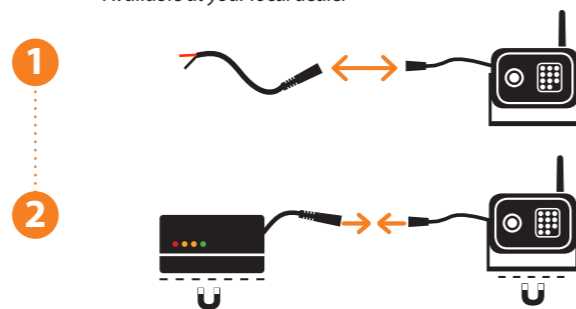

FAQ

- Is the signal between the camera and the receiver encrypted?**
Yes.
- How many cameras does the system support?**
4 cameras.
- Why does the frame rate sometimes drop when I am driving?**
When driving the signal reception might drop sometimes. This occurs as the signal to the receiver is constantly transmitted from different angles. This is considered normal when transmitting wirelessly.
- Is the camera water resistant?**
The MachineCam Mini camera is IP66 classed. This means that the camera is well protected from both dust and humidity. It can be placed outside and can be cleaned using a pressure washer.
- Can I hear sound from the camera?**
No, the camera does not have a microphone.
- I am using the camera for reversing, how do I mirror the image?**
Please see the instructions in the "Operation" section.
- What do I do if I have bad reception on the LCD-monitor?**
Start by reading through the troubleshooting section. If troubleshooting doesn't help, please visit www.ludamanuals.com or www.luda.farm
- Will the camera break at very low temperatures?**
No, at very low temperatures the picture might tone into red. At extremely low temperatures the camera might turn off. However, when the temperature gets higher again the camera will regain its functionality.
- Further questions?**
You are always welcome to visit our website www.luda.farm or contact your local sales representative.

DA/DE/ES/FI/FR/IT/NO/NL/PL/SV → www.ludamanuals.com

machineCam Mini

QUICK GUIDE



3
Years
Warranty

Register your product today
and to get 3 years warranty.
luda.farm/warranty-register

For more detailed information




→ www.ludamanuals.com


INCLUDED IN THE BOX



Camera
Art. No. 2005



5" Monitor
Art. No. 3011



12V Power Cable
Art. No. 6047



Monitor Holder
Art. No. 7034



Direct Power Cable
Art. No. 6048



Installation Kit
For mounting the camera


INSTALLATION




1 Power off off on



1 Power off off on



or




Authorized service center recommended


OPERATION




1 Power on off on



Mirror Mode

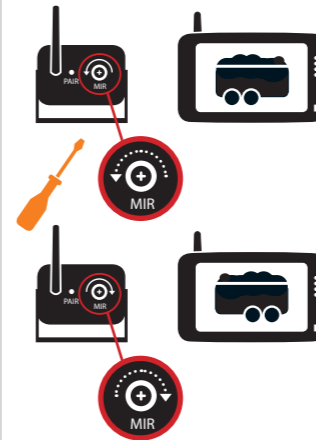

Channels

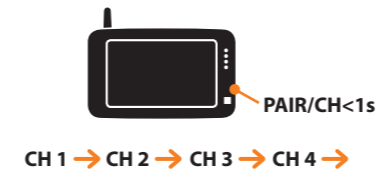

Do not operate while driving

TROUBLESHOOTING

