

Teknatool International Limited

7D Dallan Place, Rosedale, Auckland, New Zealand
Tel: +64 09 477 5600 Fax: +64 477 5601

Email: service@teknatool.com
Website: www.teknatool.com



Frequently Asked Questions

How to Remove the Control Board on Galaxi DVR 1644 lathe

Date Raised: 17 January 2017

Safe practices should always be employed to ensure the Health and Safety of yourself, employees and customers (if applicable) Refer to product manuals, exploded drawings and our website if further assistance is required, or contact us on service@teknatool.com

Date Amended


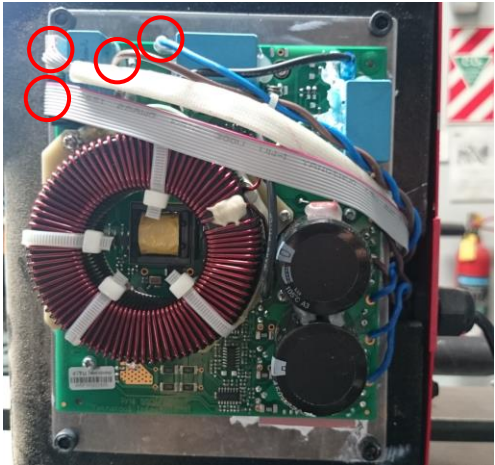
To remove the control board of the Galaxi DVR 1644 lathe:

WARNING: Make sure to unplug the lathe before commencing procedure

Required tools:

- 1 x Philips screw driver
- 2 x 5mm Allen key

Procedure:

| Step No. | Description | Image |
|----------|---|--|
| 1. | Remove all of the screws on the casing that is on the side of the head stock using the Philips screw driver. There are 4 in total (2 on top, 2 on bottom) |  |
| 2. | Once the casing is removed the control board will be exposed. Disconnect all of the wires which is coming out of the headstock (circled in red) Note: All of the removable connectors can be disconnected by hand. |  |

- 3.** Remove all of the hex screws by using the 5mm Allen key.
- This will disconnect the control board from the head stock and allow removal along with the heatsink.

