


## How to Restring the AT8410a

- Examine how the elastic holds the basket.
- Remove old elastic from basket and frame.
- Loosen 2 screws to get the elastic loose from the frame.
- Put the new elastic in its place and tighten the screws. One loop of the elastic should be slightly longer.



- Set the frame on a table with the shorter loop up.
- Put the basket into the middle of the frame (clamp side down)

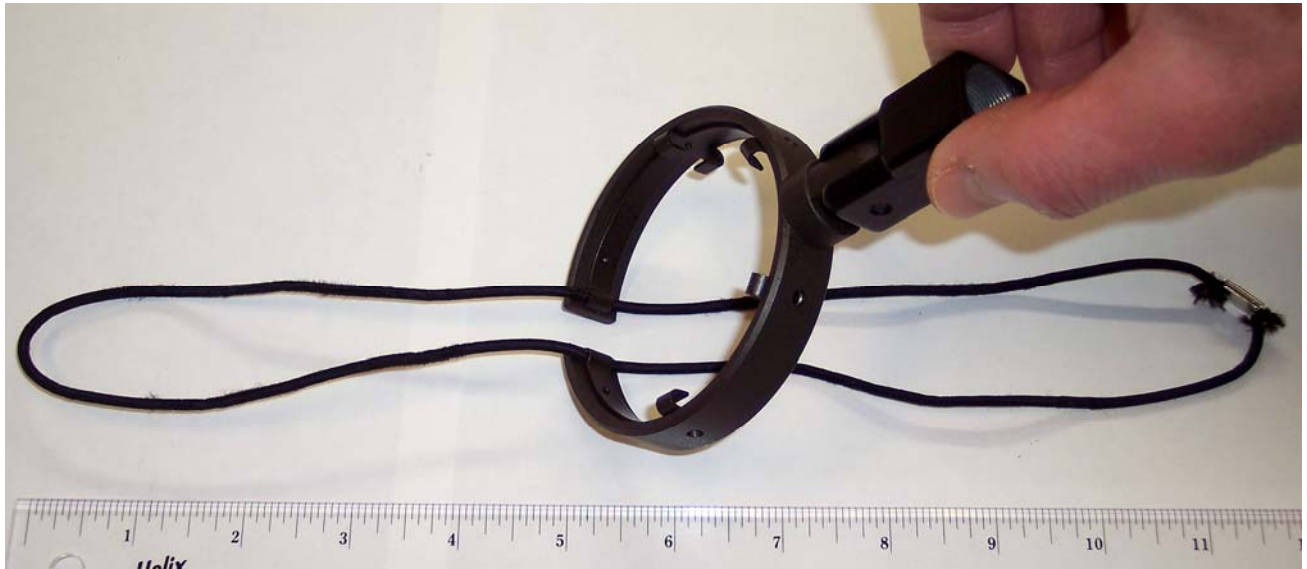

- Push the elastic into the 4 hooks on the basket.
- Put the elastic into the 4 hooks on the frame.



- Turn the entire mount over.
- Push the elastic into the 4 remaining hooks on the basket.
- Put the elastic into the last 4 hooks on the frame.
- Adjust the elastic to make the basket sit straight in the frame.



- Completed Unit

