

Contents

I	Notices and warnings.....	3
II	Package list.....	5
III	Product characteristics.....	6
IV	How to charge battery.....	10
V	Storage, maintenance and transport.....	11
VI	Troubleshooting.....	12
VII	After sales service.....	13

For proper use, maintenance and storage of the battery, it is very important that you read and understand the instructions given by this manual.

## I Notices and warnings.

1. **Battery**

- Never charge by discharge port or discharge by charge port.
- Keep battery away from fire and high temperature. Never put it into fire.
- Severe vibration, impact or extrusion is forbidden.
- Protect discharge port and charge port from rain or waterlogging.
- Appropriate environmental temperature for charge: 0~45°C.
- Allowable environmental temperature for discharge: -20~45°C.
- Operating relative humidity: ≤80% RH.

3




- Keep battery away from children.
- Before long-term storage, remove battery from the E-bike or disconnect the battery from load
- Never disassemble battery without permission.
- If there is power switch on battery, please remember to switch it off before assembling the battery into the E-bike.



If the user fails to comply with these instructions and warnings described above, you would be responsible for the consequences arising.

2. **Charger**

- Never put anything on the charger.
- No fluid or metal into charger.
- Never disassemble or refit charger.
- Never plug or unplug with wet hand.
- Never touch charger during thunder or lightning.

4

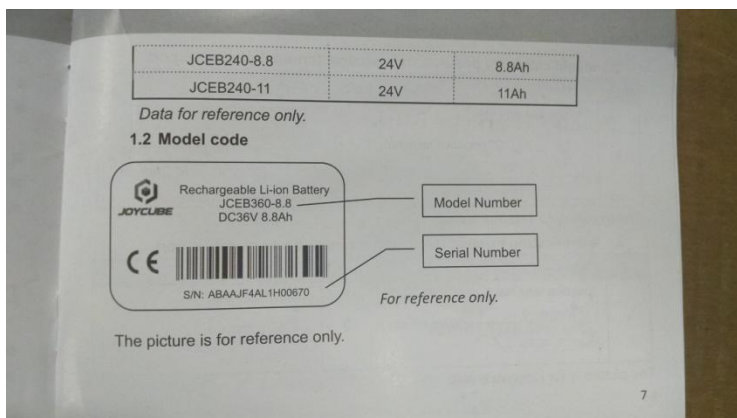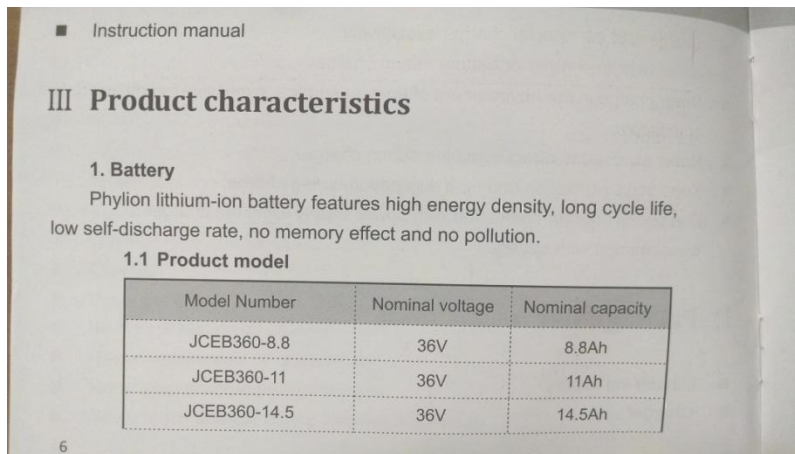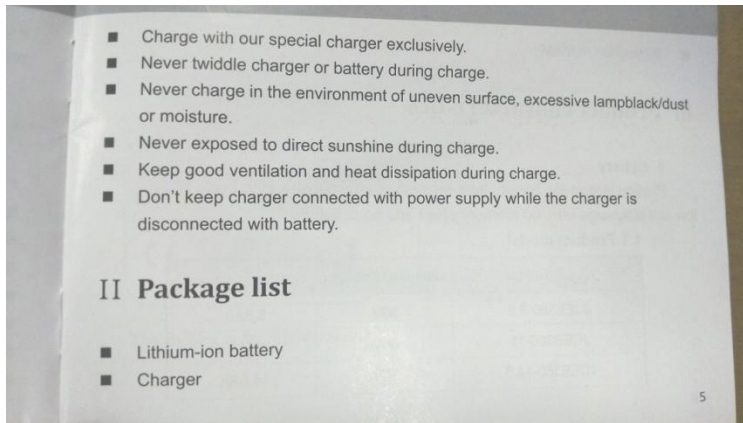

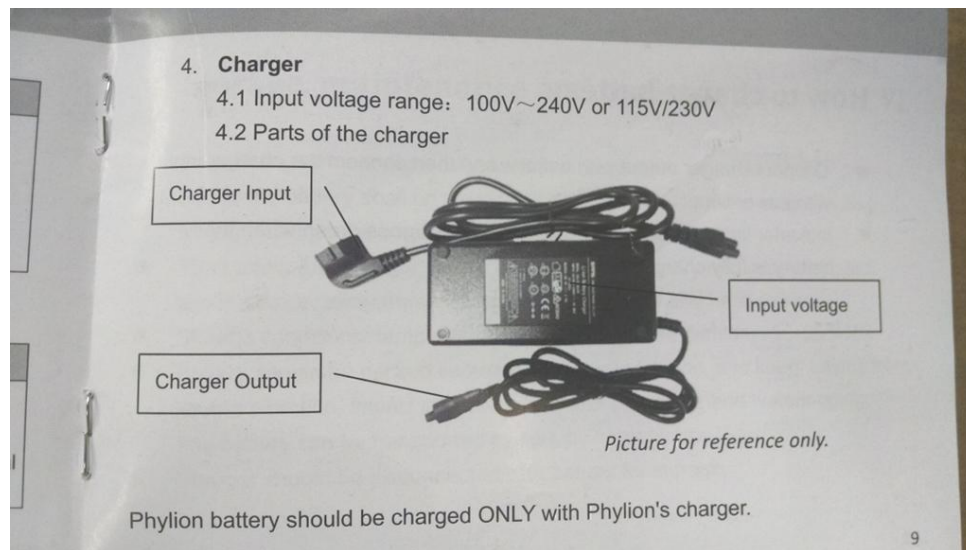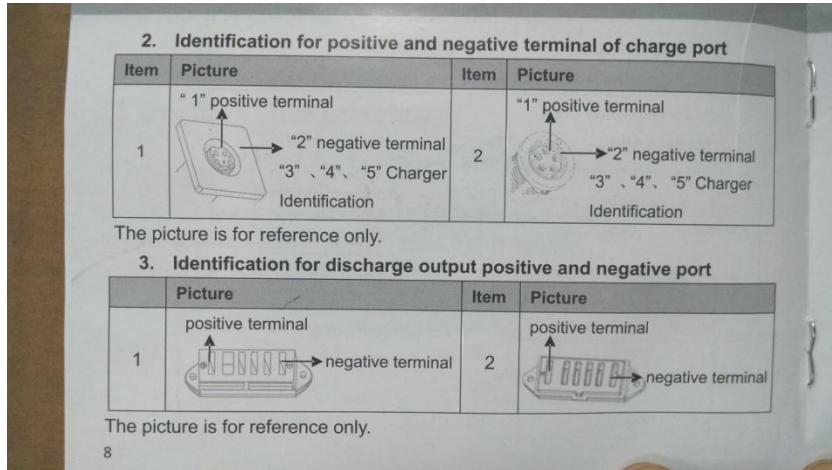

## IV How to charge battery

- Connect charger output with battery, and then connect the charger input with power supply
- Indicator light goes red during charge while it goes green when the battery is fully charged

10

## V Storage, maintenance and transport

- Before long term storage: fully discharge the battery, then charge it for 2-3 hours; the battery shall be stored in a dry and well-ventilated place. During storage, charge the battery for 2-3 hours every two months.
- The battery and charger should be stored in clean, dry and well-ventilated circumstance, away from corrosive substance, fire and heat source.
- Storage conditions: temperature  $-20\sim 35^{\circ}\text{C}$ , relative humidity:  $5\sim 65\%RH$
- Battery should be packed into carton for transportation, and keep it away from severe vibration, impact and extrusion, direct sunshine and waterlogging. The battery can be transported by sea, by air or by car.
- Charger should be disconnected with battery for storage.

11

## VI Troubleshooting

Phenomena	Possible Cause	Solution
No output voltage	Output cable/wire is disconnected with the battery	Correctly connect the output cable/wire to the battery according to the manual
	Battery is out of power	Charge the battery
Power indicator off	Input plug of the charger disconnects with the outlet	Connect the input plug of the charger to the outlet according to the manual
The battery can not be charged	Output plug of the charger doesn't closely connect to the outlet.	Check the output plug of the charger whether it's firmly connected to the battery
	Battery is already fully-charged	<i>The battery shall run good</i>

If you have any further question, please do not hesitate to contact the supplier.

12

## VII After sales service

The product has been strictly tested before delivery. Please don't disassemble or repair without permission. If you have any question, please do not hesitate to contact the e-bike/battery supplier or service department of manufacturer. Make sure to take with the guarantee sheet and invoice with you when asking for after sales service.

Manufacturer service contact:

Email: [service@phylion.com](mailto:service@phylion.com)

Tel: +86-512-6832-0233

Fax: +86-512-6841-8341

Address: No.181, Jinshajiang Road, New District, Suzhou, P.R.China

Postcode: 215153

13