

# NPA50S-12H


## Monocrystalline Module



### ELECTRICAL CHARACTERISTICS

Type	NPA50S-12H
Power Output(W)	50W
Voltage MPP Vmp(V)	17.0V
Current MPP Imp(A)	2.94A
Voltage Open Circuit Voc(V)	20.23V
Short Circuit Current Isc(A)	3.12A
Temperature Coefficient Of Voc	-[80±10]mV/°C
Temperature Coefficient Of Isc	(0.065±0.015)%/°C
Temperature Coefficient Of Power	-[0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m <sup>2</sup> wind 1m/s)	47±2°C


STC: 1000W/m<sup>2</sup> Irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3

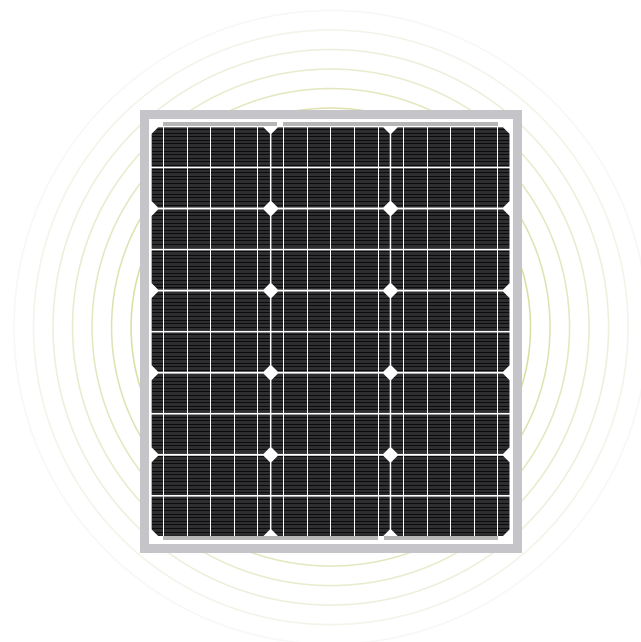


### MECHANICAL CHARACTERISTICS

Cells	Monocrystalline Silicon
Solar Cells Grade	Class A High Efficiency
Module Dimension(mm/in.)	586[23.07]x505[19.88]x30[1.18]
Weight(kg/lbs)	3.50[7.72]
Packing Information(mm/in.)	639[25.15]x557[21.93]x58[2.28]/(1pc/ctn)

### I-V CURVES (Irradiance: AM1.5, 1km/m<sup>2</sup>)

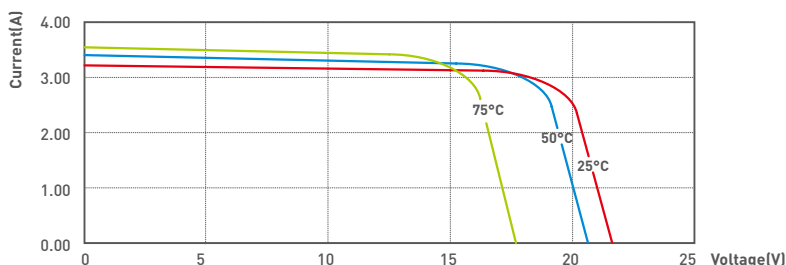

\*Specifications subject to technical changes and tests.  
NEWPOWA reserves the right of final interpretation.

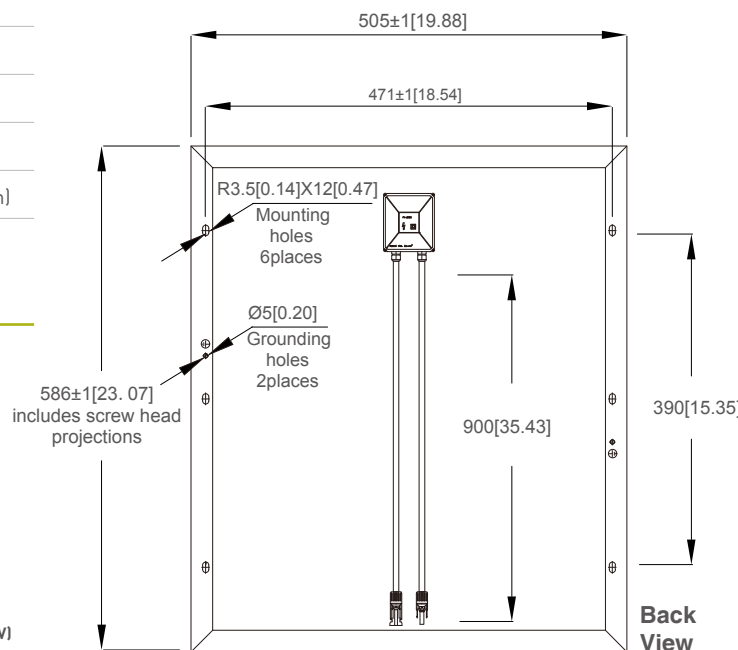

Dimensions in brackets are in inches.  
Un-bracketed dimensions are in millimeters.  
Unit: mm[in.]



702-628-7600



sales@newpowa.com



www.newpowa.com



1460 E Cedar St, Ontario, CA 91761

