

NPA175S-12H


Monocrystalline Module



ELECTRICAL CHARACTERISTICS

Type	NPA175S-12H
Power Output(W)	175W
Voltage MPP Vmp(V)	17.0V
Current MPP Imp(A)	10.29A
Voltage Open Circuit Voc(V)	20.23V
Short Circuit Current Isc(A)	10.89A
Temperature Coefficient Of Voc	-[80±10]mV/°C
Temperature Coefficient Of Isc	[0.065±0.015]% / °C
Temperature Coefficient Of Power	-(0.5±0.05)% / °C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C


STC: 1000W/m² Irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3

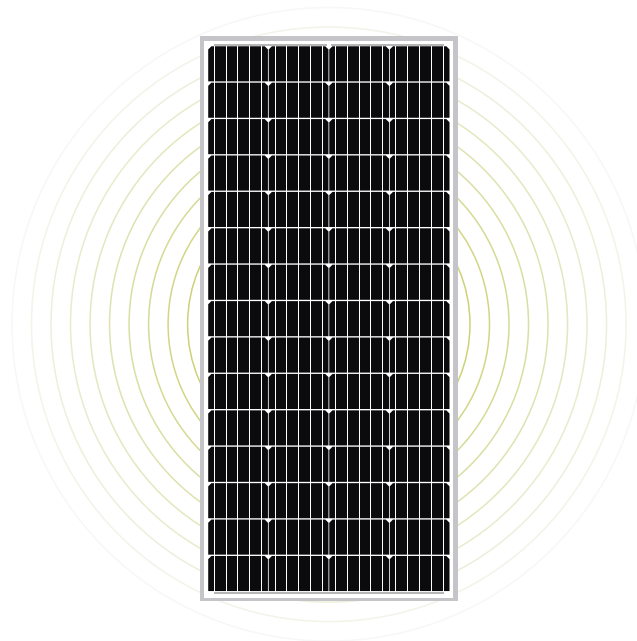


MECHANICAL CHARACTERISTICS

Cells	Monocrystalline Silicon
Solar Cells Grade	Class A High Efficiency
Module Dimension(mm/in.)	1482[58.35]x675[26.57]x35[1.38]
Weight(kg/lbs)	11.5[25.35]
Packing Information(mm/in.)	1535[60.43]x727[28.62]x63[2.48]/(1pc/ctn)

I-V CURVES (Irradiance: AM1.5, 1km/m²)

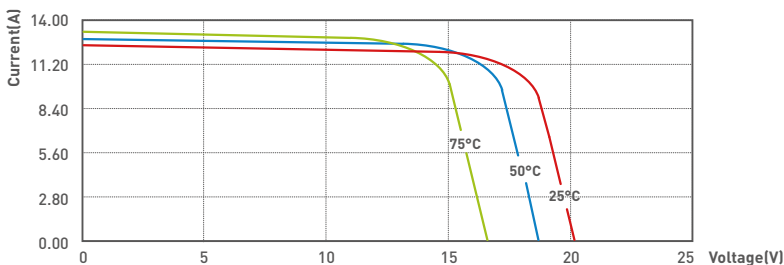

*Specifications subject to technical changes and tests.
NEWPOWA reserves the right of final interpretation.

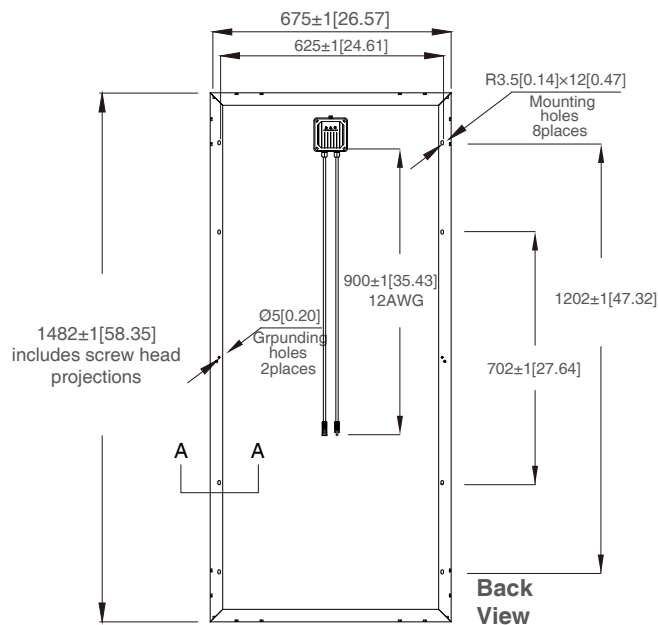

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit: mm[in.]



702-628-7600



sales@newpowa.com



www.newpowa.com



1460 E Cedar St, Ontario, CA 91761



Newpowa
BE WISE GO SOLAR