

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.

CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.


NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this luminaire cannot be replaced
If the cord is damaged, the luminaire shall be destroyed


SAFAVIEH
LIGHTING

Model#: CHA4057

Product Dimensions: 24.25"L X 24.25"W X 34-93"H

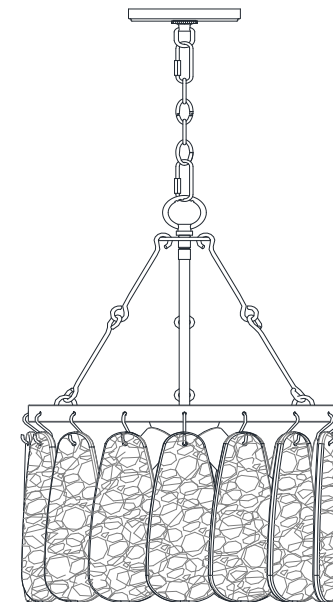


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	mounting bracket		1X	G	Closable Link		2X	M	iron ring		1X
B	machine screw		2X	H	chain		1X	N	lamp holder		1X
C	wire nut		3X	I	fixture loop		1X	O	S wire hook		24X
D	canopy		1X	J	Wire hook		4X	P	glass		24X
E	collar loop		1X	K	assembly part		1X	Q	bulb		6X
F	Canopy Nut		1X	L	straight tube		1X	R	green ground screw		1X

PREPARATION


- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASE USE TYPE"A" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 6PCS LED 4-WATT BULB IN THE BOX

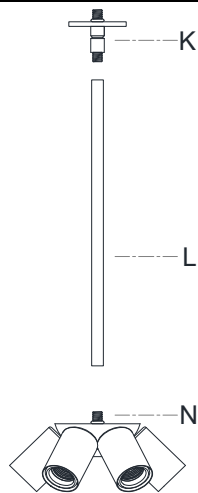


Step 1:

The top of the straight tube (L) is connected with the assembly part (K), and the bottom is connected with the lamp holder (N);

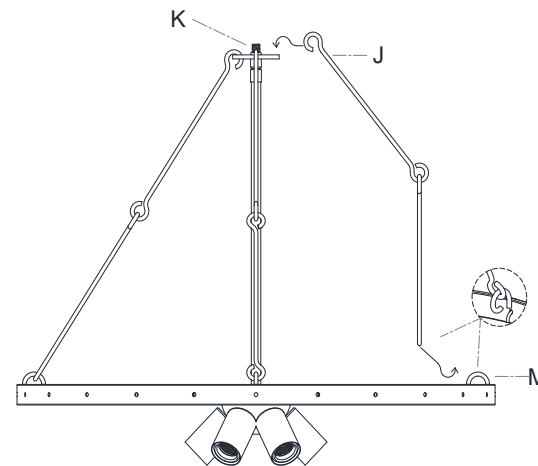

Step 2:

Use the open end of the wire hook (J) to hang on the round hole of the assembly part(K), and then use the closed end of the wire hook (J) to hang on the iron ring (M)

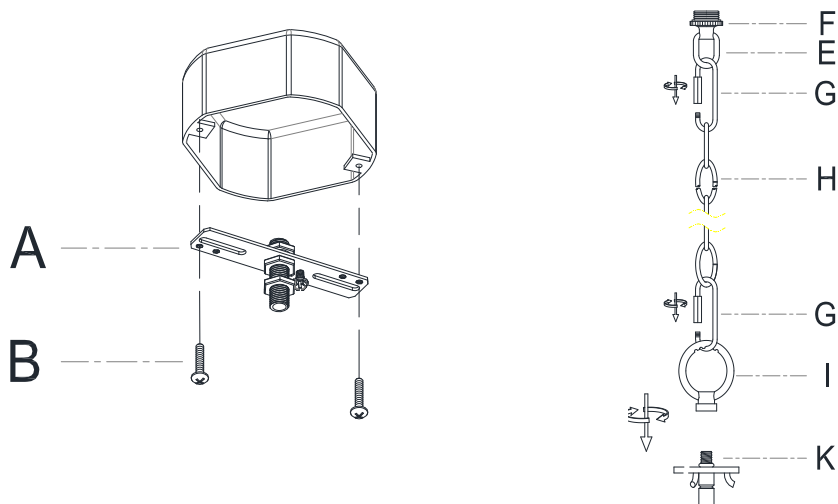


Step 3:

Fix the mounting bracket(A) to the outlet box with machine screw(B). Lock the collar loop (E) with the Canopy Nut (F); then connect the Closable Link (G) to connect the collar loop (E) to the chain (H), making sure the lead goes through the entire chain (H). Secure the fixture loop(I) to the top threaded stem of the assembly part (K).



PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

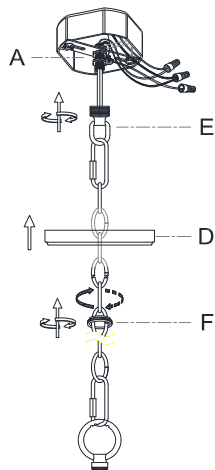

Step 4:

Raise the canopy(D) to the ceiling and then secure it by fixing the Canopy Nut(F) to the collar loop(E).

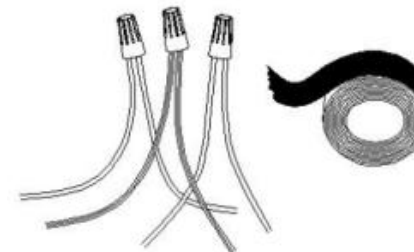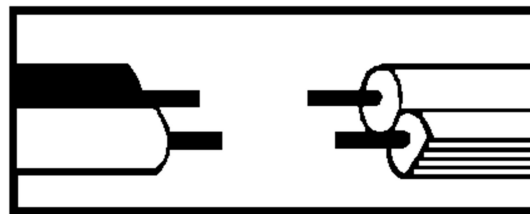

Step 5:


Make wire connections, with wire nut(C)

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections


Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(Q) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

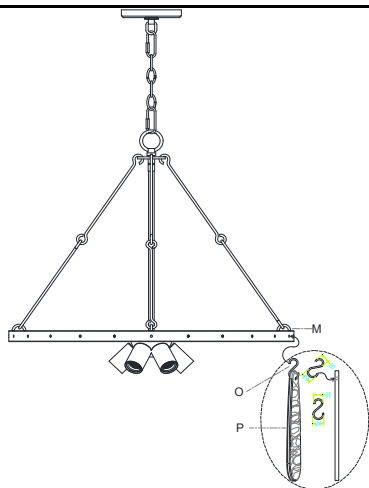

Step 6:

Hang the small S wire hook (O) into the hole of the iron ring (M), and then hang the glass (P) onto the small S wire hook (O);

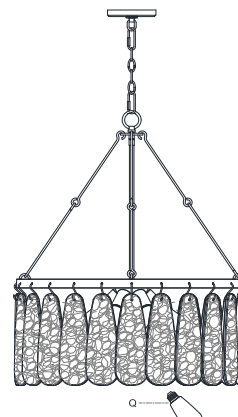

Step 7:

Hang the small S wire hook (O) into the hole of the iron ring (M), and then hang the glass (P) onto the small S wire hook (O);

Install bulbs(Q). Be sure to use light bulb(s) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.