

NOTICE

- * Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance
- * This item should be assembled on the ceiling to prevent scratching the finish during assembly
- * This item may require periodic tightening.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

PREPARATION

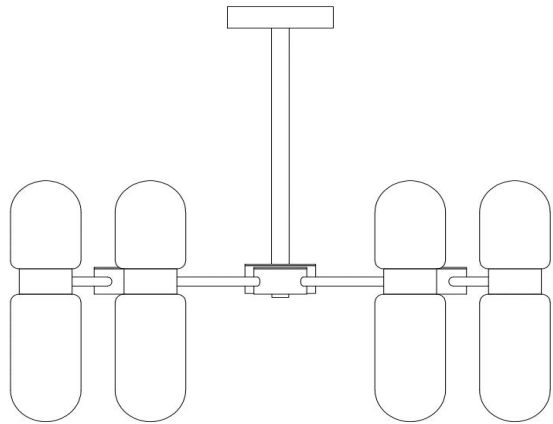
- * Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 30 minutes.

CARE AND MAINTENANCE

Part List and Hardware List			
PEICE	DESCRIPTION	PICTURE	QUANTITY
A	Lamp Body		1X
B	Tubes		3X
C	Canopy		1X
D	Mounting Plate		1X
E	Screw	 $\varnothing 4 \times 25$	2X
F	Terminal Cap		2X
G	Screw	 $\varnothing 4 \times 25$	2
H	Nut		2
I	Socket		12
J	Light bulb		12
K	glass shade		6
N	glass shade		6


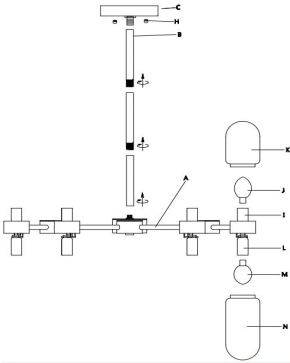





ITEM#:CHA7001A
Size:27X27X45"



PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 30 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

		
STEP1:Unpack all parts from cartons carefully. Thread tubes(B) into canopy (C) and connect tubes(B) with light body(A)	STEP2:Thread all light bulbs(J) into socket(I), and thread all glass shades(K)&(N) into socket(I). PLEASE USE TYPE"G45"BULB MAX 60W OR CFL BULB MAX 13-WATT OR LED BULB MAX 9WATT	STEP3:To connect fixture wires: Connect the live wire (L) from fitting to the live wire from main power supply. Connect the neutral wire (N) from fitting to the neutral wire from main power supply. make the green screws(D) connect the ground wire. Please pay close attention to avoiding the wires exposing outside when wiring connections.
		
STEP4:Install the mounthing plate(D) to the junction box with 2 Mounting screws(E)	STEP5:Attach the Canopy(C) to the junction box and fix it by turning the Canopy Nut(H) clockwise,Consult a qualified electrician to ensure correct branch circuit conductor.	