#### **WARNING**

- \*\* WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN \*\*
- \* Switch off the main electrical supply from the main fuse box / circuit Breaker before installation.
- \* Inspect item carefully before attempting to install.
- \* If there is any damages or obvious defects, do not install.
- \* Item may not be returned once it has been installed.

#### CARE AND MAINTENANCE

- \* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- \* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- \* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

### **NOTICE& IMPORTANT SAFETY INSTRUCTIONS**

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- \*The external flexible cable or cord of this lamp cannot be replaced

If the cord is damaged, the lamp shall be destroyed


# **Part List and Hardware List**

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate	<del></del>	1X	н	Long Stem		2X
В	Wire Connector	W	зх	1	Light Body	~9 <u>0</u> 22.	1X
С	Mounting Screw (5/32-32T*25)	Î	2X	J	Bulb	<b>a</b>	18X
D	Canopy		1X	к	Crystal		18X
E	Hanging Loop		1X	L	G9 Lamp Head Ring		18X
F	Canopy Nut	<b>6</b>	1X	м	G9 sleeve		1X
G	Short Stem		2X				



Model#: CTL1023A/B/C

Product Dimensions: 34.5"L X 34.5"W X 15"-45"H

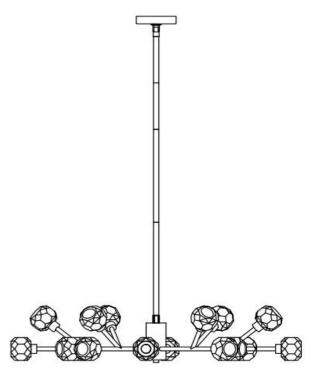


## **PREPARATION**


(C).

- \* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- \* If any part is missing or damaged, do not attempt to assemble the product.
- \* Estimated Assembly Time: 20 minutes.
- \* If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

## PLEASE USE TYPE"G9" BULB MAX 25-WATT OR LED BULB MAX 5-WATT THERE ARE 18PCS LED 3-WATT BULB IN THE BOX

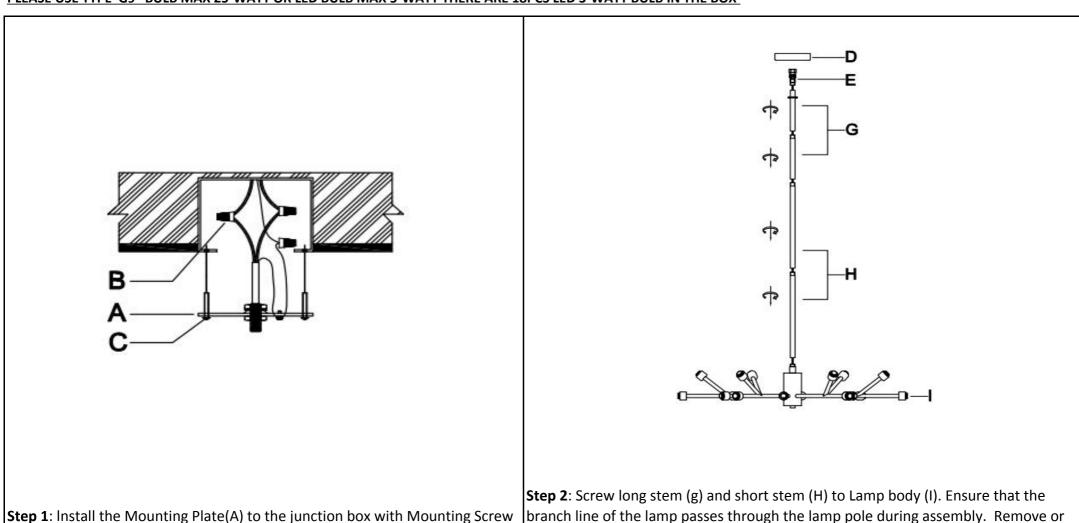

add stems to adjust height. Then screw the lifting ring (E) onto the valve stem.






Step 3: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting Plate (G), no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.



**Step 4:** Rotate and install the lamp body (I) clockwise to the mounting plate (a). Fix the canopy (d) on the junction box, and rotate the canopy nut (f) clockwise to fix it.





**Step 5:** Place the crystal (k) on the lamp body (I), and then tighten the outer ring (L) with G9 sleeve (m).

**Step 6:** Insertthe light bulb (J) into the lamp body(I).