WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.

CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
А	wire connector		3X	G	canopy		1X
В	mounting bracket		1X	Н	connectors		4X
С	tapping screw	←	2X	I	long round tube		2X
D	Wall plug		2X	J	Short round tube		2X
E	mounting screw	T	2X	К	lamp body	- F	1X
F	machine screw		2X				



Model#: CTL1049


Product Dimensions: 48"L x 48"W x15.5-

45.5"H

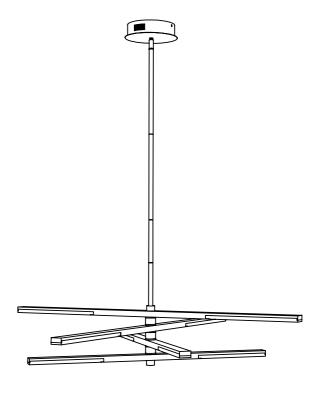


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com




Step 1:Take out the lamp from the box, find the lamp body (G) and long round tube (I), short round tube(J), according to the requirements of the installation site to select a good tube.


Step 2:Use the mainline on the lamp body (G)to pass through the tube, then tighten the tube in turn.

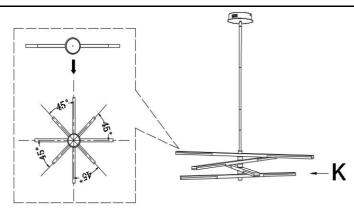

Step 4:Adjust the shape of the lamp body (K) according to the installation drawing.




Step 3:Run the mainline through canopy (G), then tighten the canopy (G) and long round tube (I).




Step 5:In canopy (G), the mainline and the transformer according to the corresponding letters of the label in turn with connectors (H) connection.

PREPARATION


- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com



Step 6:Punch the hole and install the Wall plug (D) to the ceiling. Fix the mounting bracket (B) to the outlet box with tapping screw (C) and mounting screw (E).




the bracket (B) with machine screw (F)

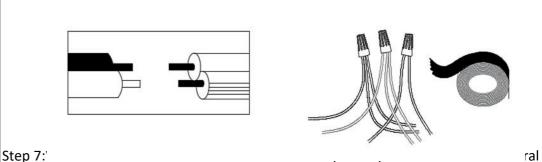

wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.CAUTION: Do not reverse the hot and neutral connections.

Grounding Instructions: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2"from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground

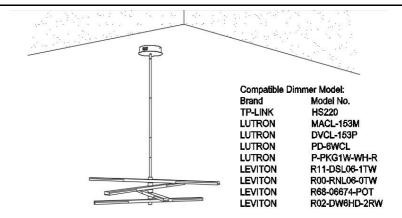

Step 8: Fasten the safety buckle on the bracket (B) and then fix canopy (G) on Step 9: Turn on the power switch and check whether the light source is normal. Complete installation.