

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.













CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN ****
- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Hex Nut		3X	G	Plain Washer		2X
B	Metal Washer		1X	H	Outlet Box Screw		2X
C	Nipple		1X	I	Steel Cable Buckle		1X
D	Lock Washer		1X	J	Cluster		1X
E	Wire Nut		3X	K	Steel Cable Buckle		1X
F	Mounting Bracket		1X	L	Canopy Ring		1X










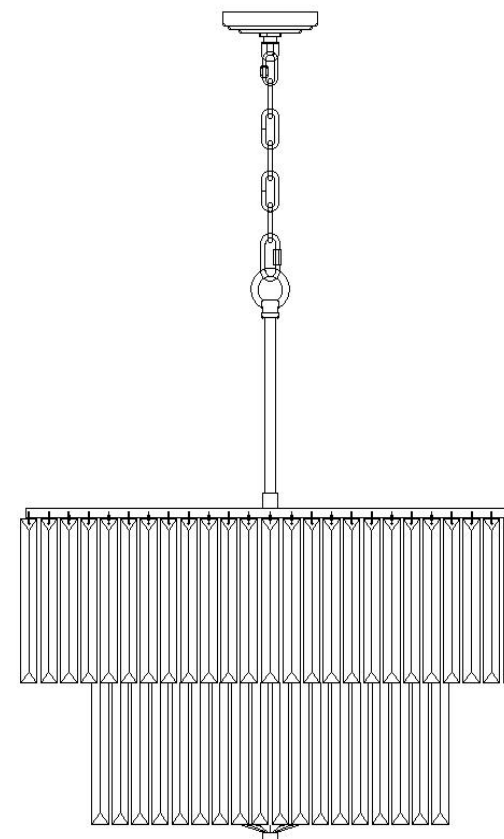








SAFAVIEH

COUTURE

Model#: CTL1054

Product Dimensions: 25.5"Dx30"-78"H




PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
M	Canopy		1X	Q2	Crystal drop		56X	W	Rubber Pad		2X
N	Chain		1X	R	Screw Driver		1X	X	Crystal Dish		1X
O	Center Rod		1X	S	Screw		4X	Y	Plain Washer		1X
P	Wrench		1X	T	Tube		4X	Y1	Bulb		12X
Q	Fixture Body		1X	U	Tube With Mipple		1X	Z	Hex Nut		1X
Q1	Crystal drop		80X	V	Crystal Frame		1X	Z1	Finial		1X

PREPARATION


- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASE USE TYPE"A" BULB MAX 25-WATT OR LED BULB MAX 9-WATT, THERE ARRE 12PCS LED 4-WATT BULB IN THE BOX

Step 1: Attach the center rod(O) on the fixture body(Q),
Lock the screw(P1) with a wrench (P),
Lock the rod (U) on the fixture body (Q),
Lock one end of the tube (T) on the crystal frame (V), and Lock the other end on the fixture body (Q) with a screw(S),
Install the rubber pad (W), crystal dish (X), and plain washer(Y) on the tube (U) in turn, lock it with a hex nut (Z), and then lock the finial (Z1).

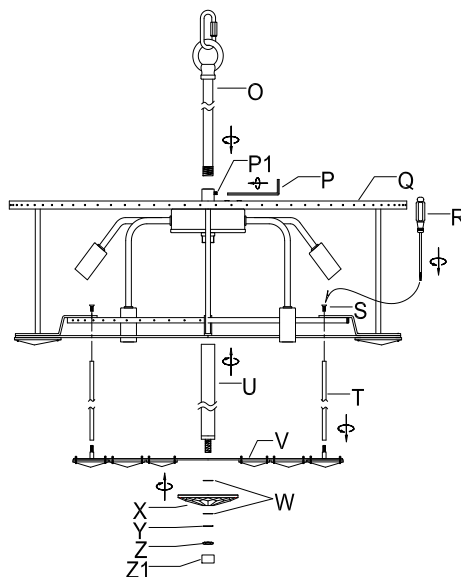


Step 2: Pass wire and cable through Chain (N), Canopy Ring(L), Canopy Loop(F1), Canopy(M), Mounting bracket(F) and out from side hole of Cluster (J).

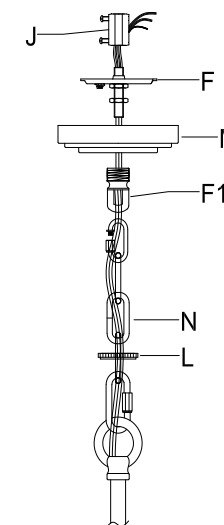


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

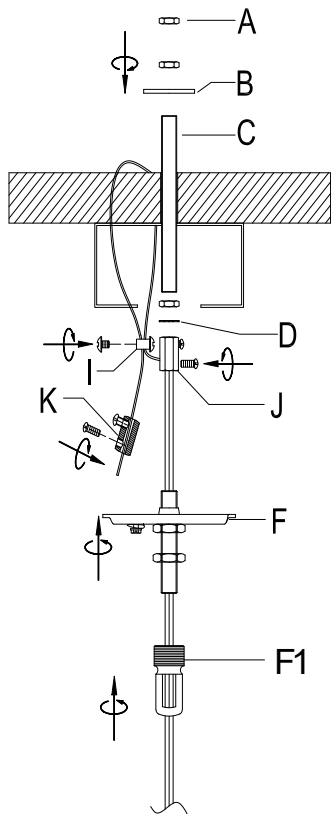

Step 3: Raise the threaded rod (C) thread to the cluster (J), then attach to the ceiling, secure with metal washer (B) and hex nut (A). Wrap the steel wire rope around the beam and lock it with the steel cable buckle (I) and (K). Tighten Mounting bracket (F) to Cluster (J), then fix Canopy Loop (F1) to Mounting bracket (F).

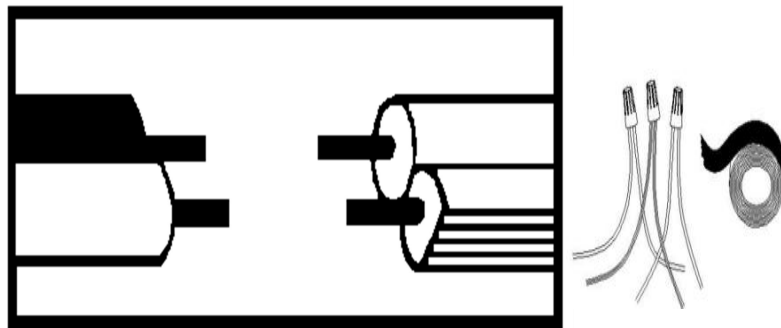

Step 4: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

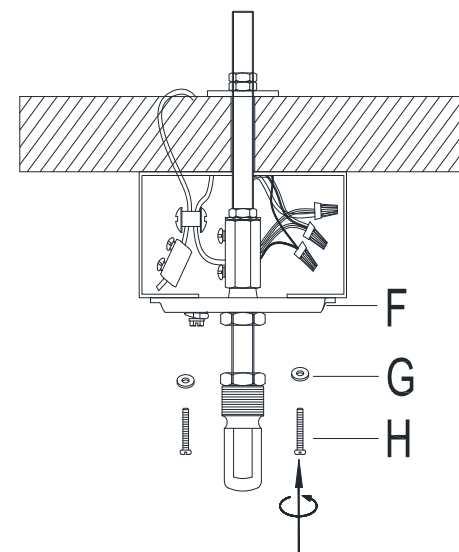

Step 5: Install the mounting bracket (F) to the junction box with plain washer (G) and outlet box screw (H)

