


SAFAVIEH

L I G H T I N G

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM #: FLU4046A

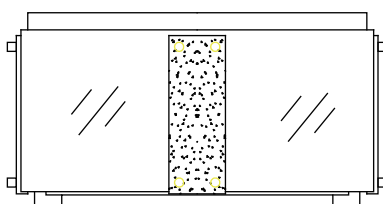

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Crossbar		1X	C	Fixture body		1X
A1	Outlet box screw		2X	D	Decorative nut		1X
B	Bending glass		4X	E	Light bulb		3X

Installation

Step 1


Insert the bending glass(B) to the fixture body.
Install the light bulb(E) to the lamp holder.

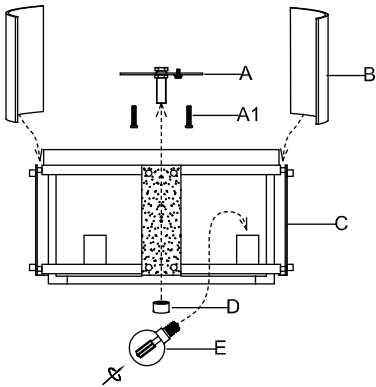


*Note: PLEASE USE ON/OFF TYPE"G" BULB H MAX 40-WATT
OR CFL BULB MAX 13-WATT
OR LED BULB MAX 9-WATT
THERE ARE 3PCS LED 4-WATT BULBS IN THE BOX

Step 2 Wire Connetion

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
* Parallel Cord(round & smooth)	* Parallel Cord(square& ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brown,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor



*Note: When parallel wire(SPTI & SPT II) is used.The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left.)




Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.


Step 3

Attach the crossbar(A) to the junction box,secure with outlet box screw(A1).
Raise the fixture body and thread it to the nipple, secure with decorative nut (D).

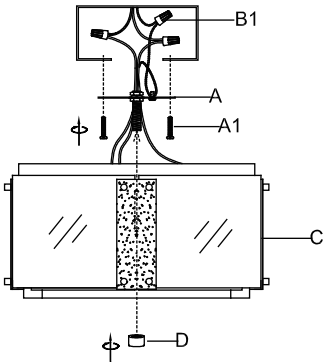

Step 4

Consult a qualified electrician to ensure correct
branch circuit conductor



ENJOY YOUR LAMP