




## Assembly Instruction

**CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.**

**ITEM#: FLU4063A**

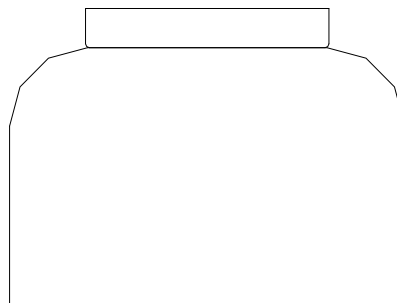

## Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


## Part List and Hardware List

|   |                     |    |                                                                                     |   |              |    |                                                                                       |
|---|---------------------|----|-------------------------------------------------------------------------------------|---|--------------|----|---------------------------------------------------------------------------------------|
| A | Wire Nuts           | X3 |  | E | Fixture Body | X1 |  |
| B | Mounting Plate      | X1 |  | F | Finial       | X2 |  |
| C | Green Ground Screws | X1 |  | G | Bulb         | X1 |  |
| D | Outlet Box Screws   | X2 |  |   |              |    |                                                                                       |

# Installation


## Step 1

Attach the Mounting Plate (B) to the junction box using the Outlet Box Screw (D) on the ceiling wall.

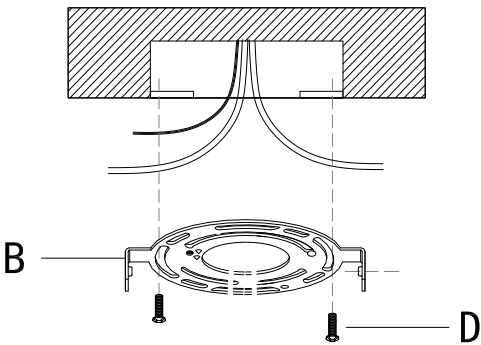


## Step 2

Using the Wire Nut (A) connected the positive electrode and the negative pole of the fixture body carefully into the positive electrode and the negative pole in junction box.

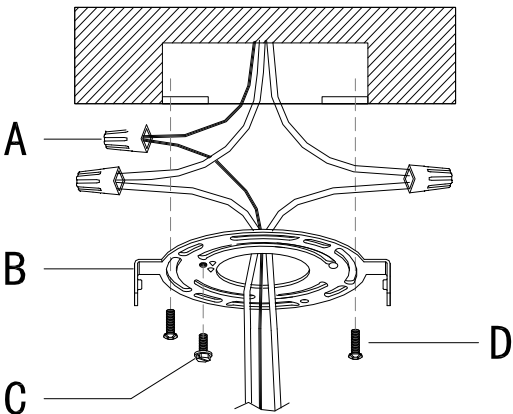


## Step 3 Wire connection

| Connect,Hot,Black or Red outlet Supply Wire to:           | Connect,Neutral,White Outlet Supply Wire to:             |
|-----------------------------------------------------------|----------------------------------------------------------|
| Black                                                     | White                                                    |
| *Parallel Cord(round&smooth)                              | *Parallel Cord(square&ridged)                            |
| Clear,Brown,Gold or Black without Tracer(colored stripes) | Clear,Brwn,Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green)with copper metal conductor      | Insulated Wire(not green)with Silver metal conductor     |

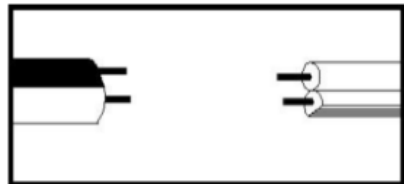

\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)

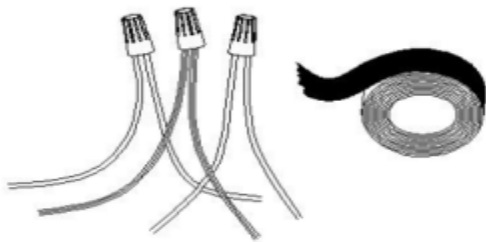

## Grounding Instructions:

a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.


b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

## Step 4

Attach the Canopy (G) through Mounting Screw (C), secure Canopy (G) with Finial (H) to Mounting Screw (C).

Lock and fix the fixture body (E) on the support mounting plate (B) with finial (F), as shown in the figure

Lock the bulb (G) into the socket

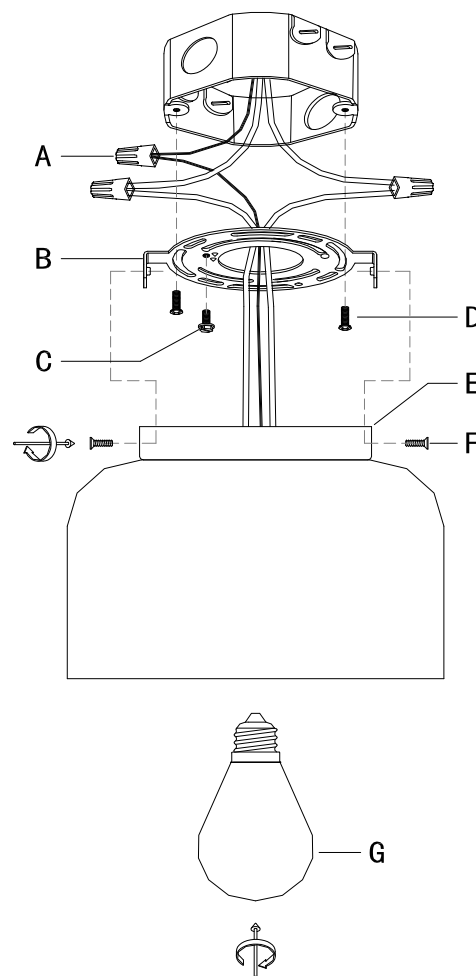

PLEASE USE TYPE "A" BULB MAX 25-WATT OR LED BULB MAX 9-WATT, THERE ARE 1PC LED 9-WATT BULB IN THE BOX.

## Step 5

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP