


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:FLU4079

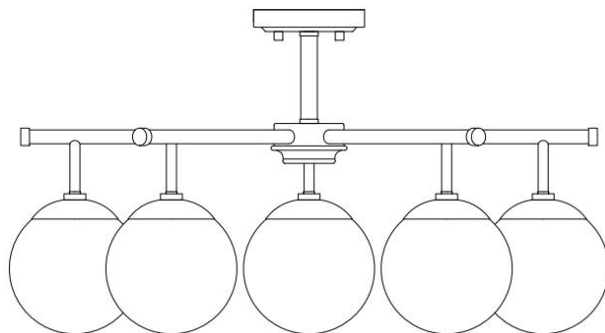

Care and Cleaning



To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	mounting screw		2X	H	tube		1X
B	mounting plate		1X	I	lamp body		1X
C	machine screw		2X	J	nut		6X
D	ground screw		1X	K	cap		6X
E	wire connector		3X	L	socket bracket		6X
F	canopy		1X	M	bulb		6X
G	Screwed Ball		2X	N	glass shade		6X

Installation

Step 1


Place the tube(H) over the coupling of the lamp body (I),then thread the nipple of the canopy (F) into the coupling .

Thread mounting screws (A) into the match holes of the mounting plate(B),then fix the mounting plate(B) to the outlet box with machine screw(C).

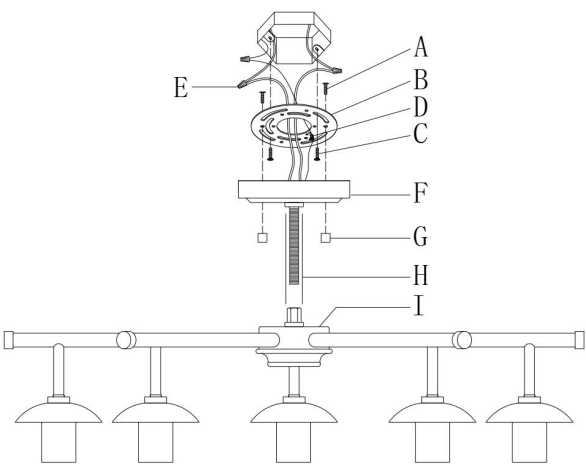

Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 3

Attach the canopy (F) to the Mounting plate (B) and fix it by turning the screwed ball (G)

Step 4

Loosen the nut (J) and socket bracket (L).


Insert the bulbs (M) into the Sockets

Have the opening of glass shade (N) go over the socket, insert one side of glass shade (N) opening over the socket bracket (L), then adjust the glass shades (N) position and put the other side of the glass shade (N) over the other side of the socket bracket (L), then position against the cap (K).

Carefully adjust the glass shade (N) placement and have it sit centered on top of the cap (K). Then thread down the nut (J) and tighten together both socket bracket (L) and glass shade (N).

PLEASE USE TYPE"A" BULB MAX 25-WATT OR CFL BULB MAX 9-WATT OR LED BULB MAX 5-WATT

THERE ARE 6PCS LED 4-WATT BULB IN THE BOX

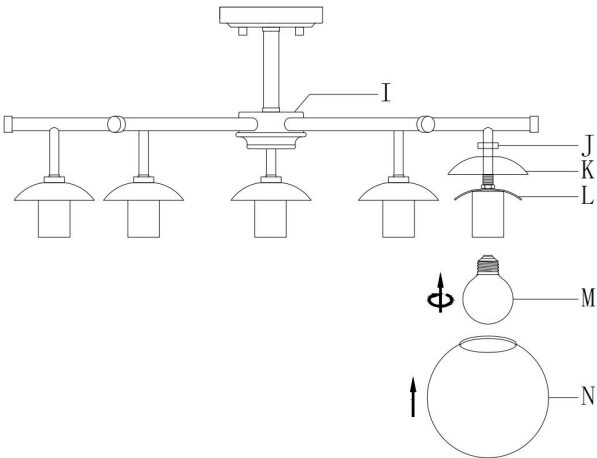

Step 5

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP