


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4110

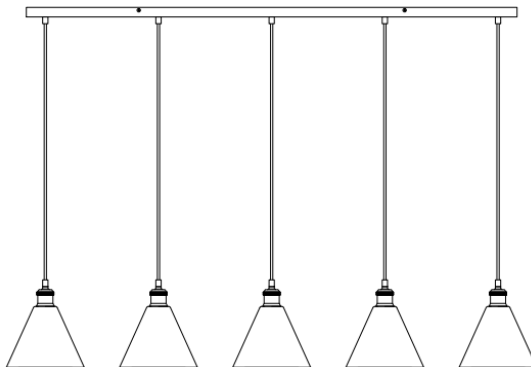

Care and Cleaning


To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Screw		2X	F	Lamp Body		1X
B	Wood Screw		4X	G	Headless Screw		5X
C	Mounting Plate		1X	H	Glass Shade		5X
D	Wall Anchors		4X	I	Socket Ring		5X
E	Screws		4X	J	Bulb		5X

Installation


Step 1

Unpack all parts from cartons carefully.

Determine the location for the lamp. Using the mounting plate (C) as a template, mark the location of the holes for the wall anchors (D).


Drill the appropriate size holes for the wall anchors (B). (the holes should be slightly smaller than the size of the anchors (D).)

Secure mounting plate (C) to outlet box with mounting screws (A). And allowing for the wood screws (B) to protrude through the hole on mounting plate (C), then screw the wood screw (B) to the anchors (D).

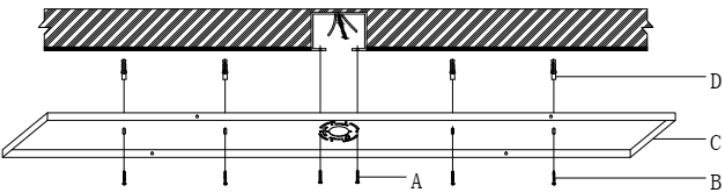


Step 2

Adjust the cord length by unscrewing the headless screw (G) from the canopy of the lamp body (F) and alter the cord to the desired length. Tighten the headless screw (G) to secure.

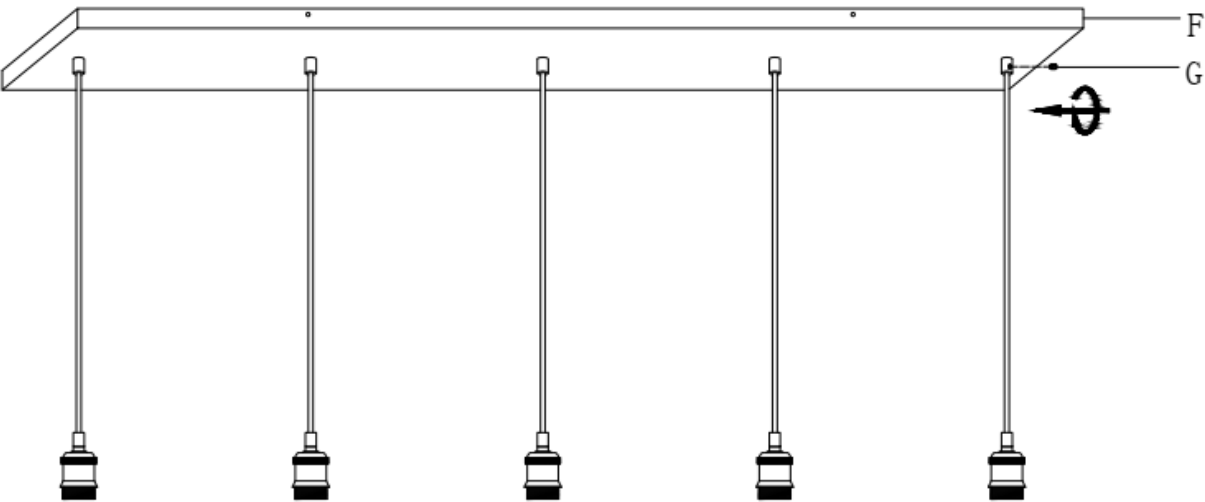


Step 3 Wire connection

Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
*Parallel Cord (round & smooth)	*Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brwn, Gold or Black without Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See illustration on left)



Grounding Instructions:


- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Attach the Canopy(F) to the Mounting Plate (C) , then secure with the screws (E) into the canopy (F) to the mounting plate (C)

Place the glass shades (H) over the sockets, the seure with the socket rings (I).
insert the bulbs (J) into the Sockets

**PLEASE USE TYPE"A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR
LED BULB MAX 9-WATT
THERE ARE 5PCS LED 4-WATT BULB IN THE BOX**

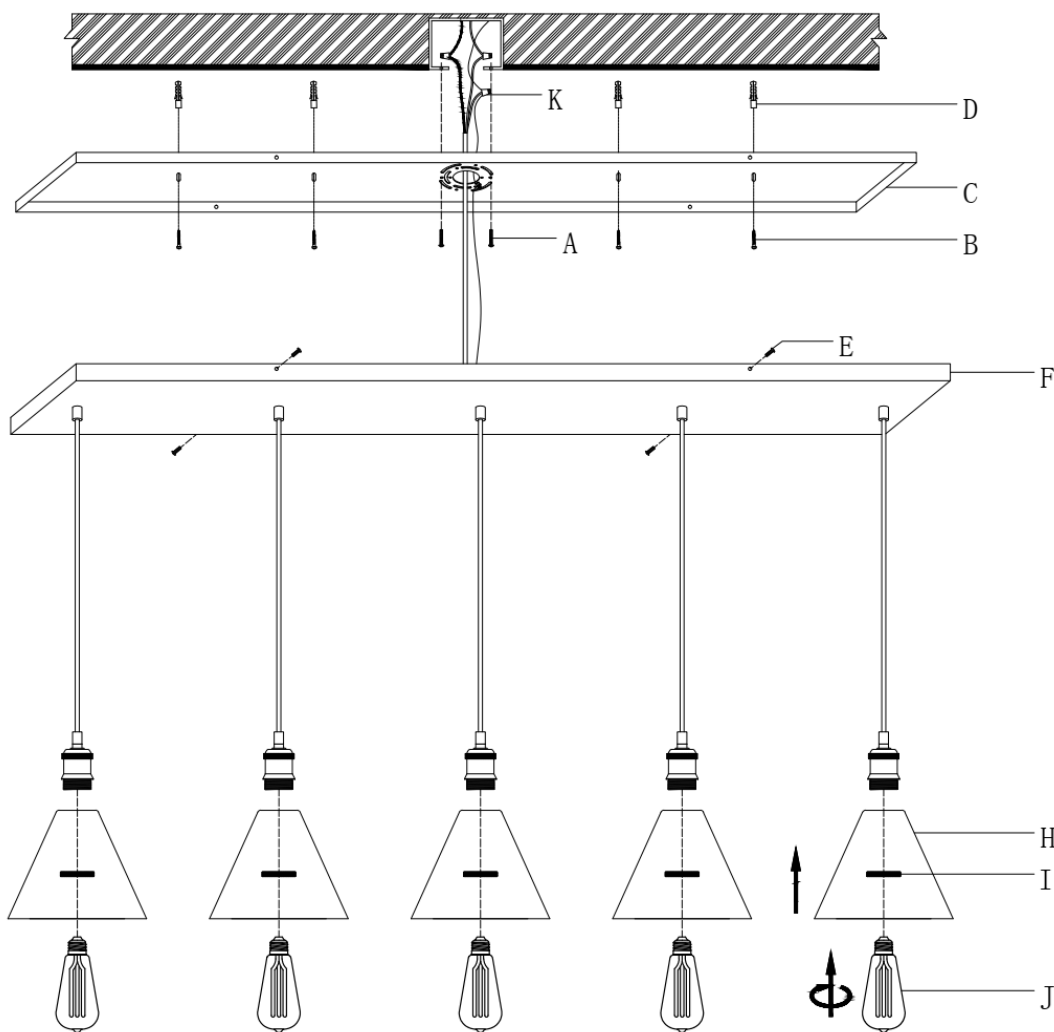

Step 5

Consult a qualified electrician to ensure correct
branch circuit conductor.

ENJOY YOUR LAMP