

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.



CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	J	Quick link		2X
B	Mounting Bar		1X	K	Chain		1X
C	Mounting Screws		2X	L	Collar loop ring		1X
D	Ground Screw		1X	M	Loop		1X
E	Nex Nut		1X	N	Center Rod		1X
F	Nipple		1X	O	Fixture Body		1X
G	Knurled Nut		1X	P	Bulb		5X
H	Canopy		1X	Q	Fabric Shade		5X
I	Collar loop		1X	R	Tube		5X



Model#: PND4118


Product Dimensions: 26"Lx26"Wx37.5-109.5"H

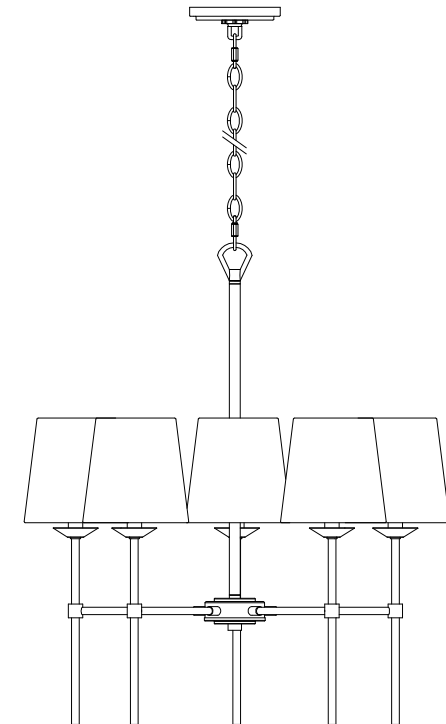

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com


NOTE: PLEASE USE TYPE"B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 5PCS LED 4-WATT BULB IN THE BOX

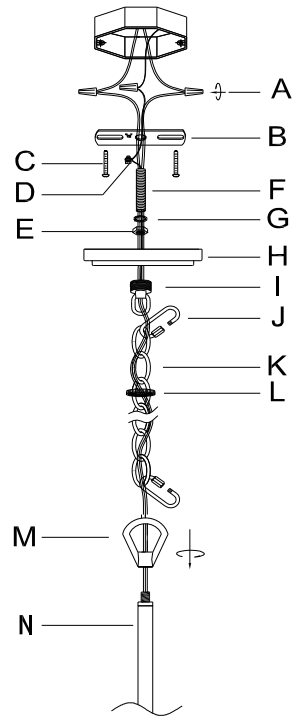

Step 1: Unpack all parts from cartons carefully.

Place the Canopy (H) onto the Collar loop(I) Screw the Nipple (F) into the threaded portion of the Collar loop(I) and fix it by turning the Collar loop ring(L) clockwise till tight.

Attach the Quick link(J) onto the Collar loop(I).

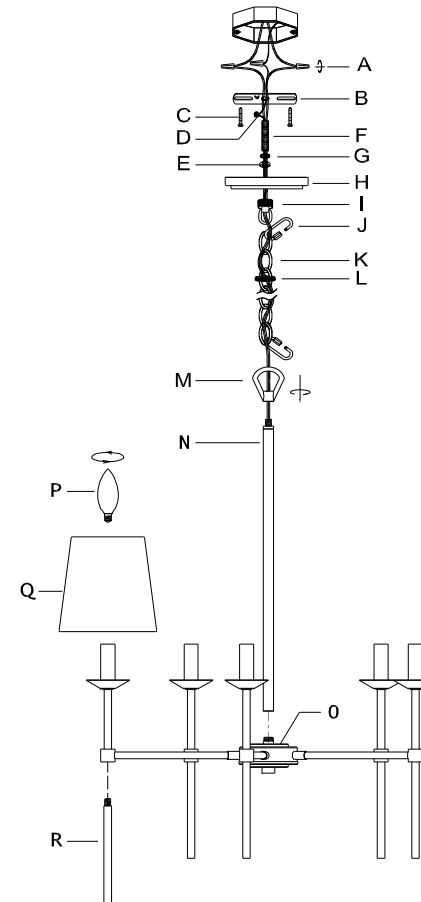


Step 2: Attach the Quick link(J) onto the Loop(M). Tighten the Center Rod(N) to the Ground Screw in the middle of the Fixture Body(O).

Tighten the Center Rod(N) to the Nipple in the middle of the Fixture Body(O).

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

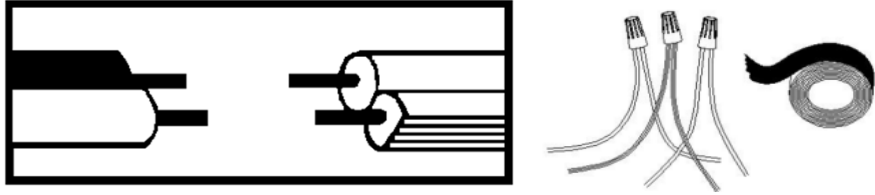


Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

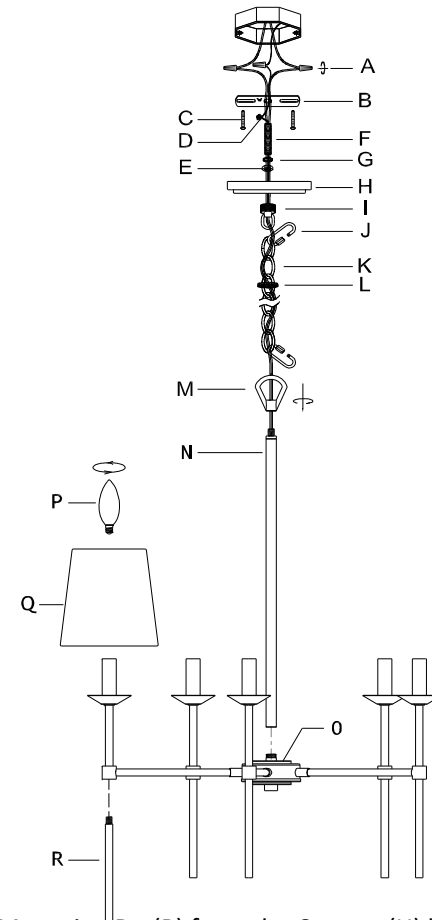

Step 4: Separate the Mounting Bar(B) from the Canopy (H) by unscrewing the Collar loop ring(L).

Install the Mounting Bar(B) to the junction box with Outlet Mounting Screws(C). Attach the Canopy (H) to the junction box and fix it by turning the Collar loop ring(L) clockwise.

Screw the 5 Tube(R) onto the Collar loop at the bottom of the Fixture Body(O).

Place 5 Fabric Shade(Q) on the sleeve in turn. Install 5 Bulbs(P) on the Socket inside the Fabric Shade(Q).