


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4131A

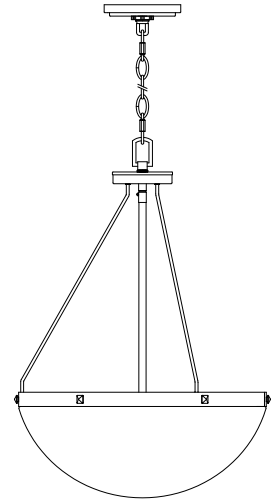

Care and Cleaning


To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

A	Wire Nuts	X3		I	Collar Loop	X1		Q	Finial	X3	
B	Mounting Plate	X1		J	Quick link	X2		R	Steel Ring	X1	
C	Mounting Screws	X2		K	Chain	X1		S	Glass	X1	
D	Green Ground Screw	X1		L	Collar Loop Ring	X1		T	Bulb	X3	
E	Nex Nut	X1		M	Loop	X1					
F	Nipple	X1		N	Fixture Body	X1					
G	Knurled Nut	X1		O	Rod	X1					
H	Canopy	X1		P	Wire Housing	X1					

Installation



Step 1

Unpack all parts from carton carefully.

Place the Canopy (H) onto the Hanging Loop (I)

Screw the Nipple (F) into the threaded portion of the Hanging Loop (I) and fix it by turning the Canopy Nut (F) clockwise till tight.

Attach the Closable Link (J) onto the Hanging Loop (I).

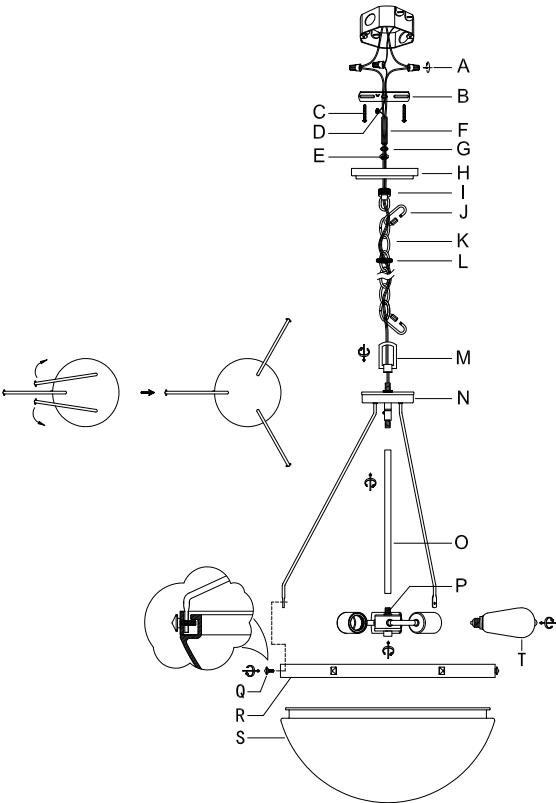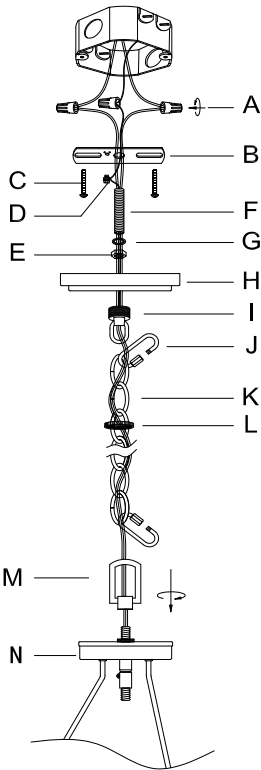


Step 2


1. Support components
The fixture body (N) is adjusted to be evenly distributed.
2. according to the drawing. Twist the loop (M) onto the fixture body(N) at the top of the tooth until tightened.
- 3 Attach the Closable Link (J) onto the Fixture Loop (M).
4. Twist the rod (O) to the bottom tooth segment of the fixture body.
5. Lock the steel ring (R) to the fixture body (N) with 3 finials (Q)
Then insert the glass (S) opening into the steel ring (R)

Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left




Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Separate the Crossbar (B) from the Canopy (H) by unscrewing the Canopy Nut (L).

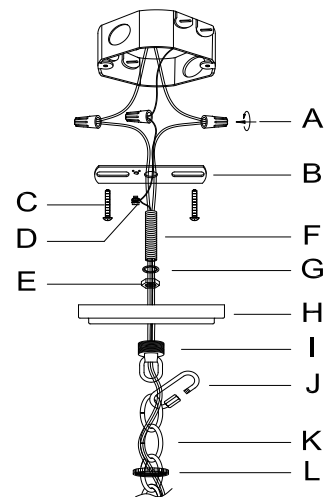


Step 5

Install the Crossbar (B) to the junction box with Outlet Box Screws (C).

Attach the Canopy (H) to the junction box and fix it by turning the Canopy Nut (L) clockwise.

Install 3 light bulbs (T) to lamp socket.

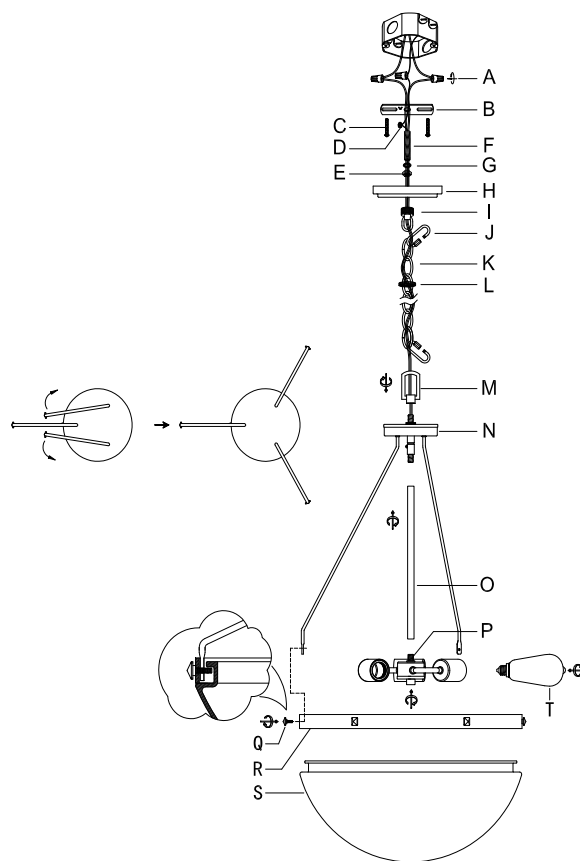

PLEASE USE TYPE"ST" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 3PCS LED 4-WATT BULB IN THE BOX.

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP