

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.





CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
 - * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	G	Chain		1X
B	Mounting Screw		2X	H	Shade		1X
C	Mounting Plate		1X	I	Tube		1X
D	Canopy		1X	J	Socket Assembly		1X
E	Canopy Nut		2X	K	Bulb		5X
F	Closable Link		2X				

 **SAFAVIEH**
LIGHTING

Model#: PND4211

Product Dimensions: 30"Lx30"Wx17" - 76"H

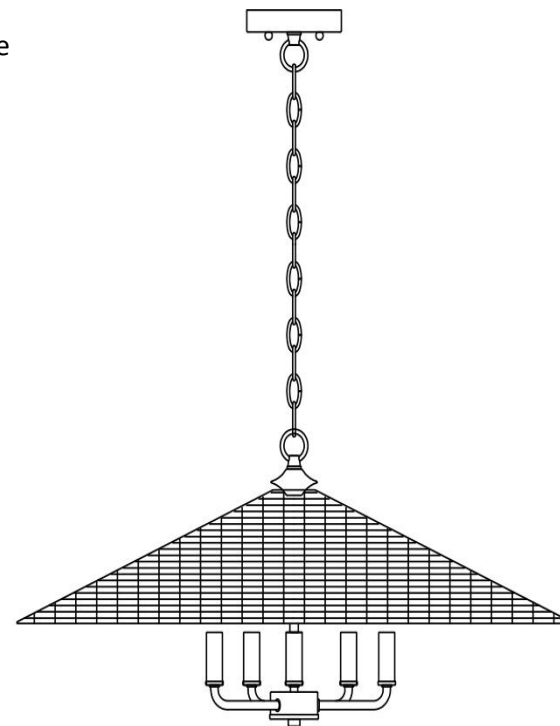

PREPARATION


* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.

* If any part is missing or damaged, do not attempt to assemble the product.

* Estimated Assembly Time: 20 minutes.

* Tools Required for Assembly (not included): Screwdriver, Junction box

NOTE: PLEASE USE TYPE"B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 5PCS LED 4-WATT BULBS I

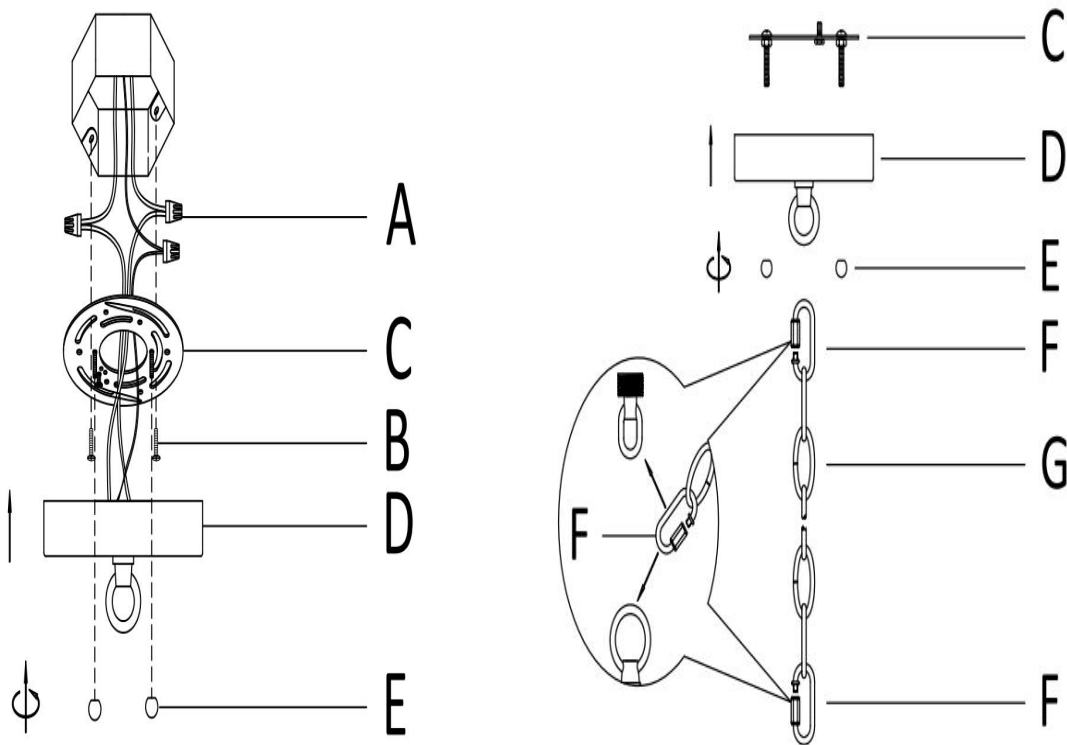


Step 1: Unpack all parts from cartons carefully.

Separate the Mounting Plate(C) from the Canopy (D) by turning the Canopy Nut (E) anti-clockwise.

Install the Mounting Plate(C) to the junction box with Mounting Screw (B).

The Canopy Nut(E) from the Canopy (D), Connect Mounting Plate (C) and Canopy(D) and Hanging Loop(F) by turning the Canopy Nut (E).



Place the Hanging Loop(F) onto the Canopy Link(D) and Hanging loop lock the Hanging loop (G).

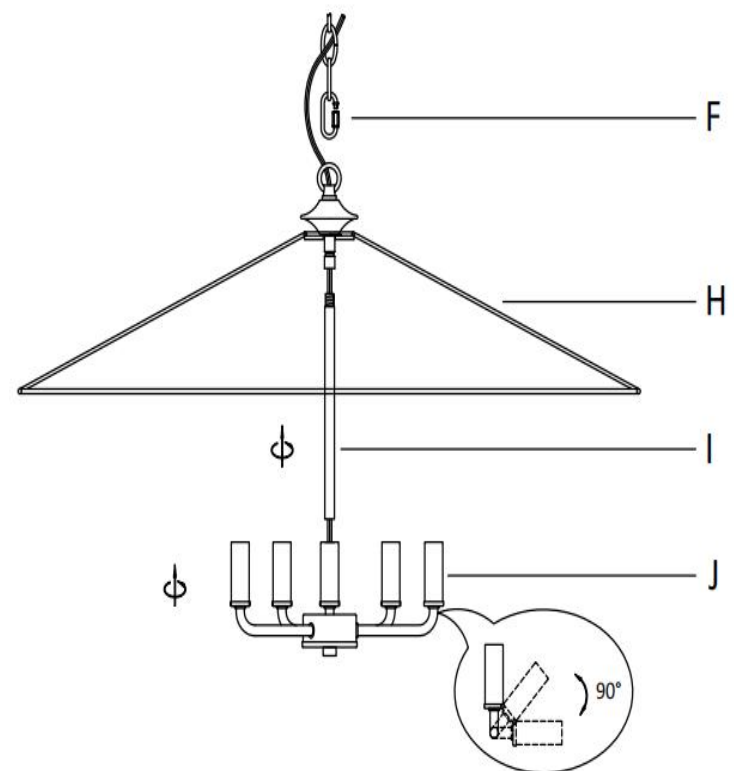

Step 2: Adjust the Sockets (J) to the 90 degree position, Insert the fixture wire through the tube(I) shade (H) . Insert the fixture wire through the tube(I) shade (H) Closable Link (F) and tighten them .

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

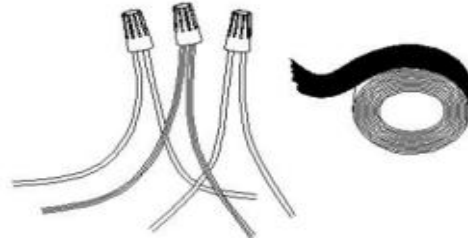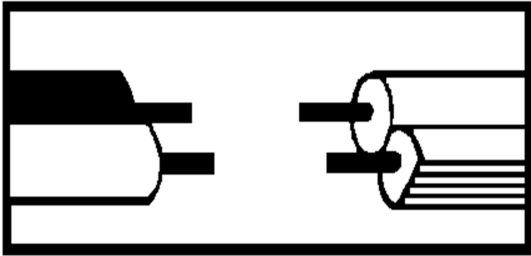


Step 3: Wire connection----A


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

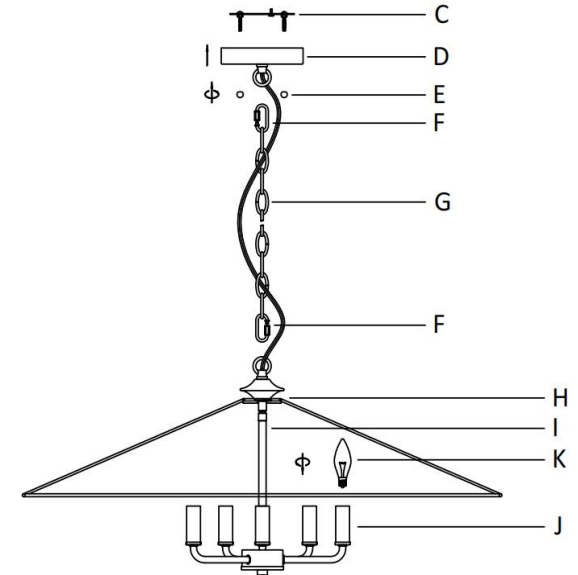

Step 4: Separate the Canopy Nut (E) from the Canopy (D) anti-clockwise, then Put the shade (H) onto the Closable Link (F)

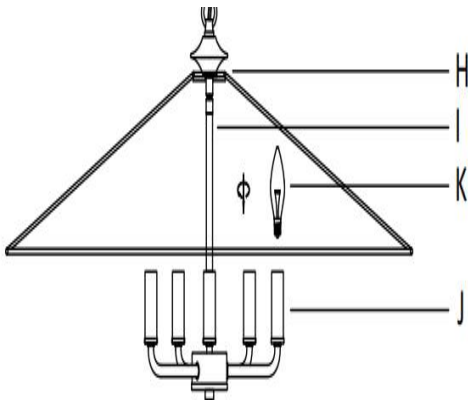

Step 5: Insert the bulbs (K) into the Sockets (J).