

WARNING

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.


CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	mounting plate		1X	H	Handle		1X
B	Screw		4X	I	Bulb		1X
C	Anchor		4X	J	Iron Shade		1X
D	Outlet box screw		2X	K	Lamp Arm		1X
E	wire connector		3X	L	Tube plug		1X
F	Mounting screw		4X	M	ground screw		1X
G	Backplate		1X				

SAFAVIEH
LIGHTING

Model#: SCN4092

**Product Dimensions: 5.875"L X36.5"W
X24.5"H**

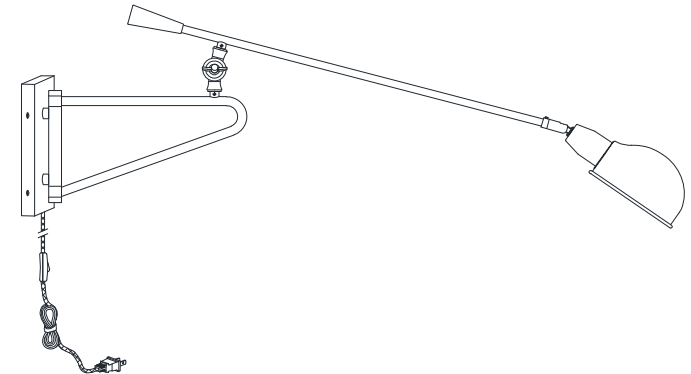


PREPARATION


- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASE USE TYPE"A" BULB MAX 25-WATT OR LED BULB MAX 9-WATT, THERE IS LED 5-WATT BULB IN THE BOX


Installation to the wall




Step 1: First mark the position of the rubber plug hole with the mounting plate (A), punch holes on the wall and install the anchor (C), and then fix the mounting plate (A) on the wall with screw (B) .

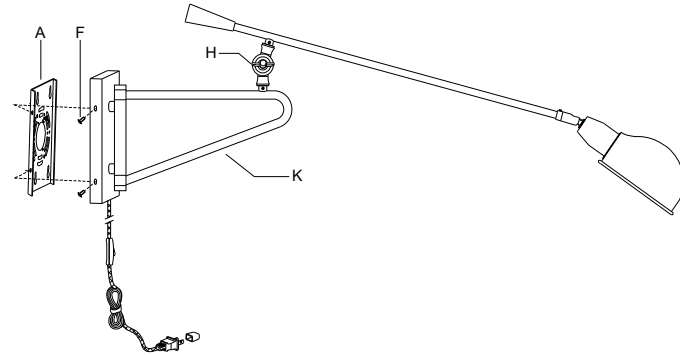

Step 2: Fix the lamp arm (K) on mounting plate (A) with mounting screw (F).

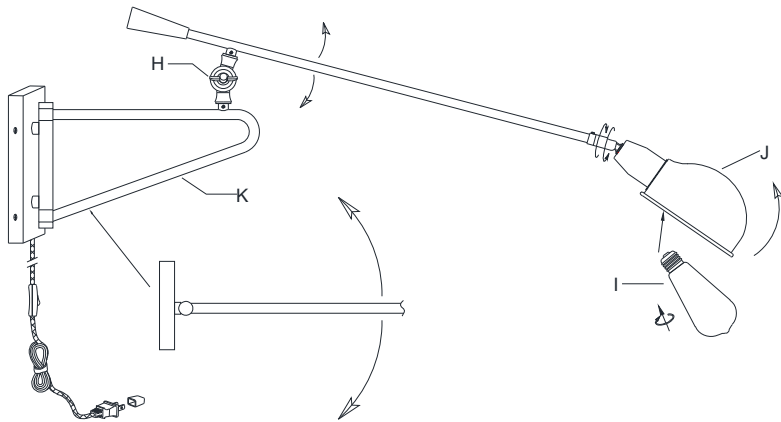


Step 3: Then loosen the handle (H), adjust the height of the lamp body, rotate the iron shade (J), adjust the position of the iron cover, rotate the lamp arm (K) from side to side, and install the bulb (I) into the socket after adjusting the position.

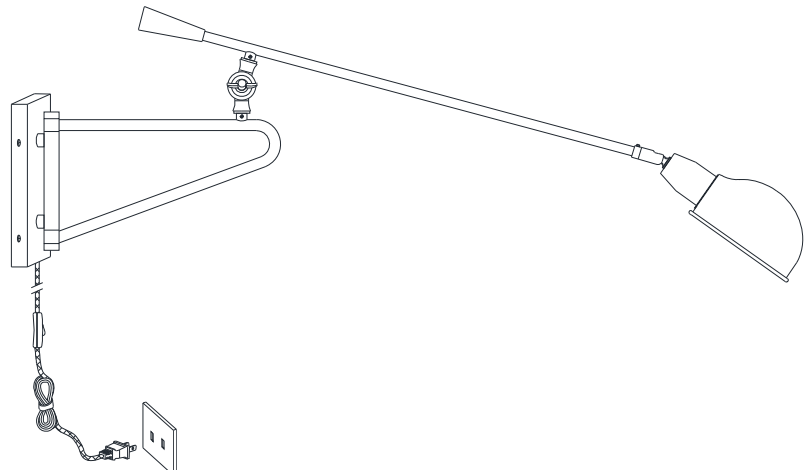


Step 4: Put the plug into the plugbase.



Installation to outlet box

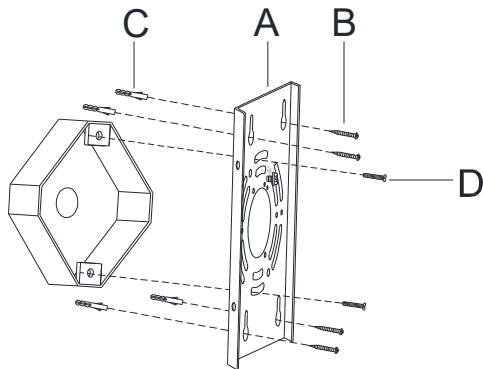

Step 1: First mark the position of the rubber plug hole with the mounting plate (A), punch holes on the wall and install the anchor (C), and then fix the mounting plate (A) on the junction box with screw (B) and outlet box screw (D)

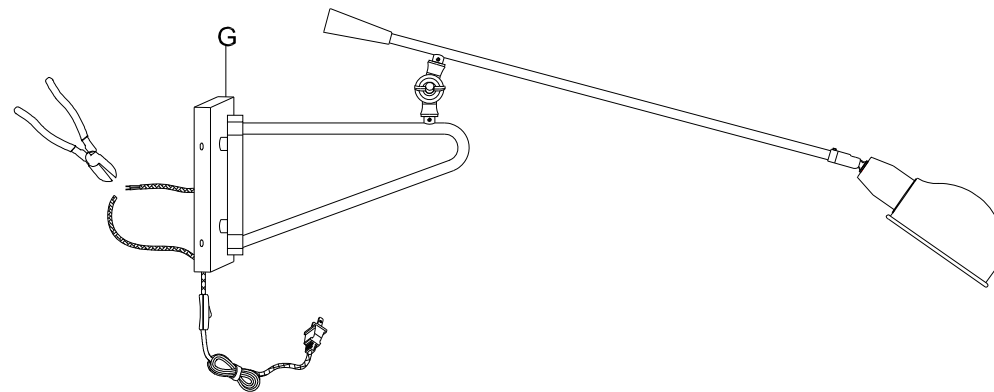

Step 2: Keep the length of the fixture wire at least 6 in. from the center of the backplate (G) and cut the fixture wire. Then use the wire strippers (not included) to separate approximately 1/2 in. of the insulated wire.

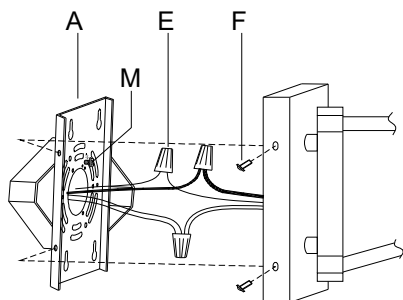

Step 2: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire connector.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire connector.

CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw (M) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

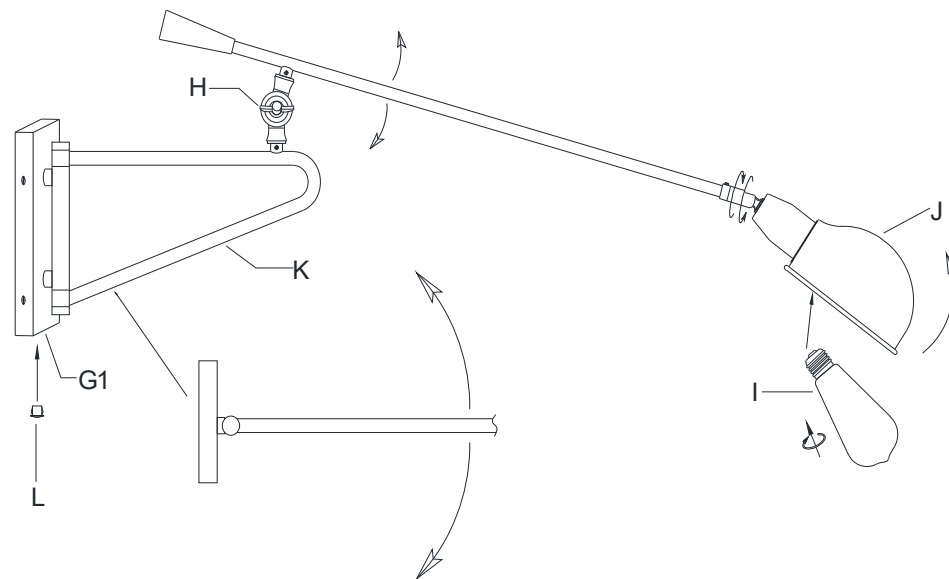

Step 4: Install the tube plug (L) at (G1), then loosen the handle (H), adjust the height of the lamp body, rotate the iron shade (J), adjust the position of the iron cover, rotate the lamp arm (K) from side to side, and install the bulb (I) into the socket after adjusting the position.