

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.



CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	machine screw		2X	G	fix screw		4X
B	mounting plate		1X	H	Canopy		1X
C	ground screw		1X	I	Plug cable		1X
D	wire connector		3X	J	Lamp cup		1X
E	Expanded rubber		4X	K	Lamp shade		1X
F	Self tapping screw		4X	L	Bulb		1X



Model#: SCN4112


Product Dimensions: 37.5"L X13"H X 8"E



PREPARATION - For plug in


- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASE USE TYPE"A" BULB MAX 40-WATT OR LED BULB MAX 5-WATT, THERE IS LED 4-WATT BULB IN THE BOX

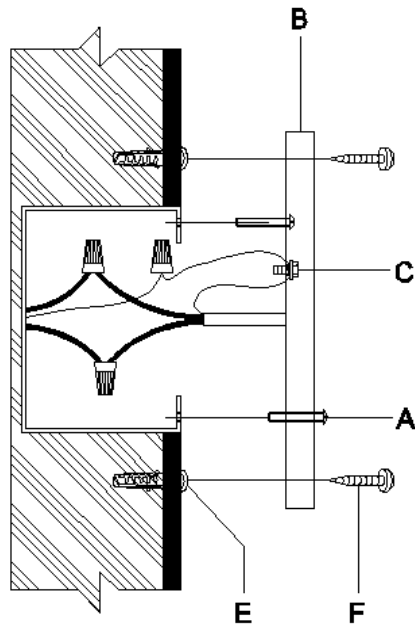


Step 1: Carefully remove all parts from the cardboard box.

Drill holes in a suitable location on the wall according to the hole position of the mounting plate (B), tap the expansion adhesive (E) into the hole with a hammer, and fix the self tapping screw (F) in the expansion adhesive (E) with a screwdriver; Then fix the mounting plate (B) with self tapping screws (F), and then use machine screws (A) to secure the mounting plate (B) to the junction box




Step 2: Connect the canopy (H) to the mounting plate (B) and secure it by turning the fix screw (G)

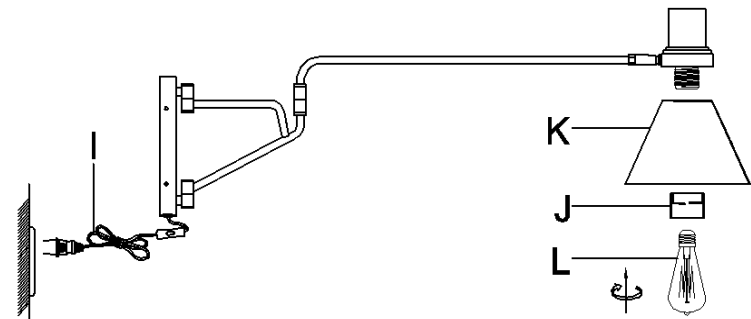


Step 3: Fix the lampshade (K) onto the lamp holder using a lamp cup (J), then fix the bulb (L) inside the lamp holder, and then insert the plug wire (I) into the socket

PREPARATION - For hardwire



- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

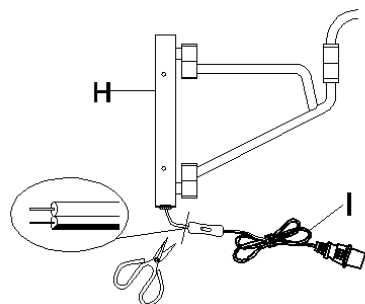

Step 1: Do not use the plug wire solution. First, use scissors to cut the switch position on the Plug cable (I), peel off the wire head, and then retract it into the canopy (H); Then follow step 1 to secure the mounting plate (B)



Step 2: Connect the canopy (H) to the mounting plate (B) and secure it by turning the fix screw (G)

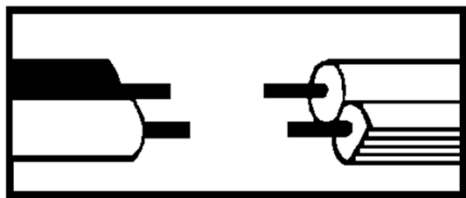

Step 3: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

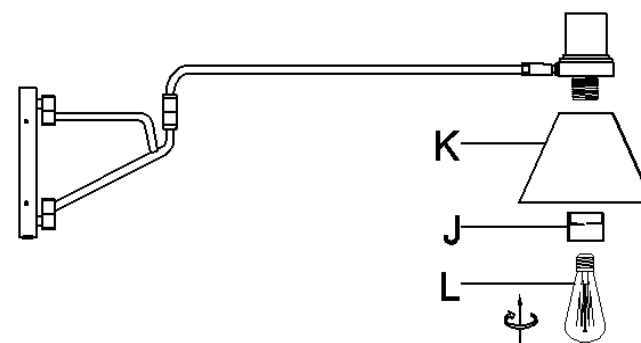

Step 4: Fix the lampshade (K) onto the lamp holder using a lamp cup (J), then fix the bulb (L) inside the lamp holder