


CARE AND MAINTENANCE

Spot clean using a mild water-free solvent. Only a professional cleaner should undertake a complete overall cleaning.  
The use of steam or water-based cleaners may cause excessive shrinking or staining.

NOTICE

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* This item may require periodic tightening

Part List and Hardware List

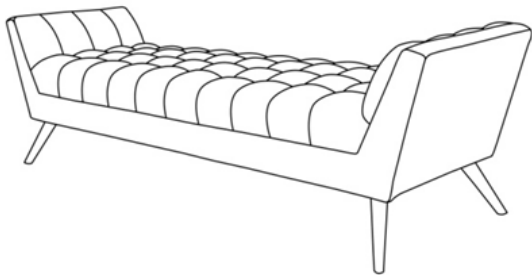
| PIECE | DESCRIPTION               | PICTURE                                                                             |    |
|-------|---------------------------|-------------------------------------------------------------------------------------|----|
| A     | Bench Body                |    | 1X |
| B     | Bench Leg                 |    | 4X |
| HW1   | Split Lock Washer (M6)    |    | 8X |
| HW2   | Flat Washer(M6)           |   | 8X |
| HW3   | Socket Screws 6*1.05*35MM |  | 8X |
| HW4   | Allen Key                 |  | 1X |

SAFAVIEH  
C O U T U R E

SFV4755

Dimensions: 53.1"WX 20.9"Dx20.9"H

Weight Capacity: 275lbs



WARNING: DO NOT STAND ON BENCH

WARNING: DO NOT OVER TORQUE BOLTS/SCREWS

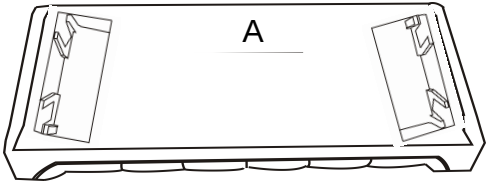
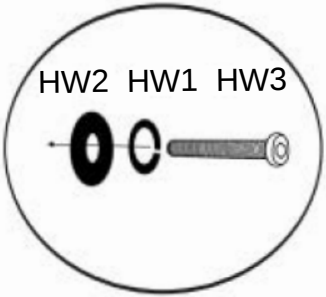
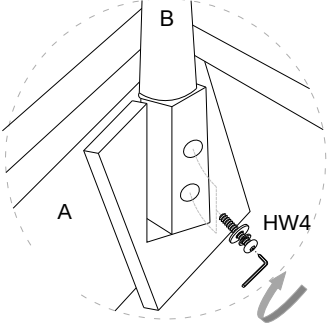
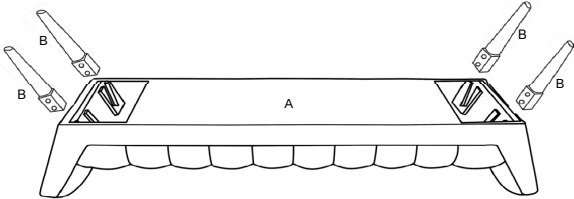
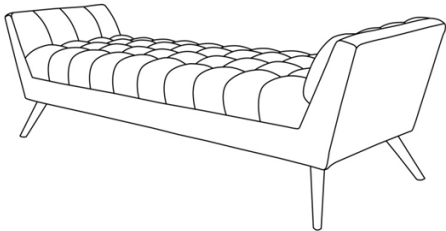
The legs and hardware are located underneath the bench in the velcro compartment

## PREARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.  
If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 10 minutes.

Tools Required for Assembly (included): Allen Key

|                                                                                          |                                                                                                                                                                                             |                                                                                     |
|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|         |                                                                                                           |  |
| <b>STEP1</b> OPEN THE VELCRO ON THE UNDERSIDE OF THE SEAT AND TAKE OUT LEGS AND HARDWARE | <b>STEP2</b> PUT THE WASHERS ON THE SCREW IN THE ORDER SHOWN IN THE PICTURE                                                                                                                 | <b>STEP3</b> INSERT THE LEGS AND SCREW IN THE SCREWS BUT DON'T TIGHTEN COMPLETELY.  |
|        |                                                                                                          |                                                                                     |
| <b>STEP4</b> CLOSE THE ZIPPER ON THE UNDERSIDE OF THE SEAT                               | <b>STEP5</b> PUT THE BENCH UPRIGHT AND MAKE SURE ALL LEGS ARE LEVEL, THEN FIRMLY TIGHTEN BOLTS WITH ALLEN KEY WHILE THE BENCH IS UPRIGHT AS PICTURE ABOVE, THE BENCH IS READY TO ENJOY NOW! |                                                                                     |
| <b>The legs and hardware are located underneath the bench in the velcro compartment.</b> |                                                                                                                                                                                             |                                                                                     |