
Assembling Instructions 1/2 A 2 x 14 x • Ring (2 x) Metal Rod (3 x) • Leg (2 x) Upholstered Seat Back crossbar (1 x) Bottom crossbar (2 x) Front crossbar (1 x) 1 x 1 - Assemble all pieces together following 2 - Screw only 1 side of the chair using screw driver or codes (A,B,C,D), except the upholstered seat accessory B 3 - Place the chair with the screwed side facing the floor


and use the carton box as protection to avoid any damage

4 - Remove carefully the unscrewed leg

Assembling Instructions



 $\boldsymbol{5}\,$ - Insert rings and the upholstered seat into the 3 metal rods

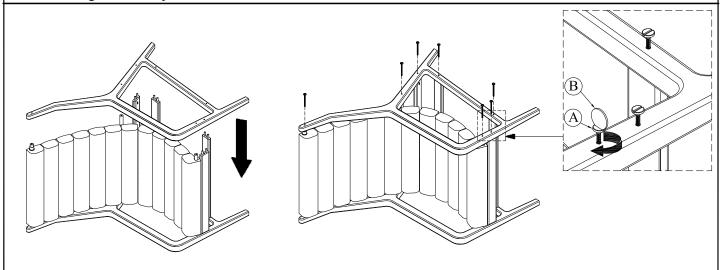

- 6 Place and screw the second leg
 - Put back the chair in normal position



- 7 Take off the codes stickers
 - Tight all bolts again before first use

2/2