


**5510 Series Ball Valves Vs. 5519 Series Diaphragm Valves**

**NEW**

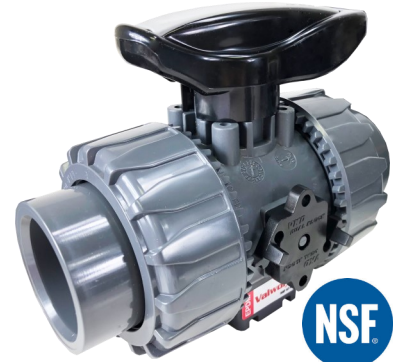

NSF372/NSF61  
Drinking Water

Feature	5519 Series	5510 Series
Type	2-way On-Off & <b>Flow Regulating</b>	2-way On-Off
Pipe Sizes	1/2" to 2" NPT and Socket	<b>1/2" to 4" NPT and Socket</b>
Port Size	Full Port	Full Port
Valve Body	PVC	PVC
Handle	<b>300 Position Lockable Handwheel Included</b>	Handle Included
Actuated Options	NC Air Actuated	<b>Air, Electric, Electronic Positioner</b>
Suitable Media	<b>Abrasives, wastewater, certain reactive chemicals, suspended solids</b>	Clean flowing liquids and drinking water
Diaphragm or Ball Seats	<b>EPDM Diaphragm with EPDM O-Rings FPM or PTFE with FPM O-rings</b>	PTFE seats with EPDM or FPM seals
Stem Seals	<b>Fluids do not contact internal stem</b>	Dual EPDM or FPM seals
Pressure Rating	150 PSI Liquid	<b>232 PSI Liquid</b>
Temperature Rating	32 to 140° F	32 to 140° F
Approvals	No Approvals	<b>Certified to NSF/ANSI 372 &amp; NSF/ANSI 61 G potable drinking water ANSI B1.20.1, ASTM D1784, cell class 12454</b>
Flow Regulation	<b>Essentially Linear</b>	Sinusoidal