



NON-SLIP 60°Double-Strip Ruler

One of a range of Double-Strip Rulers that are designed to make cutting Half-Square Triangles, Quarter-Square Triangles, 60° Triangles, and 45° Kaleidoscope Triangles from pairs of 2 1/2" strips sewn together to form a 4 1/2" strip set.


Designed by Rachel Cross

#CGRDBS60

Made in USA



SEE A DEMO
SCAN WITH ANY
QR READER



Creative Grids® USA, Inc
400 W. Dussel Dr. Ste B
Maumee, OH 43537
www.creativegridsUSA.com

Creative Grids® UK, Ltd.
Unit 23A Pate Road
Leicester Road Industrial Estate
Melton Mowbray
Leicestershire, LE13 0RG England
www.creativegrids.com




NON-SLIP Turn-a-Round™ 60° Double-Strip Triangle Ruler designed by Rachel Cross

The 60° Double Strip Triangle Ruler is one of a range of Double Strip Rulers that are designed to make cutting Half-Square Triangles, Quarter-Square Triangles, 60° Triangles and 45° Kaleidoscope Triangles from pairs of 2 1/2" strips sewn together to form a 4 1/2" strip set.

One side of the ruler is 2 1/2" wide to cut your strips and the other side has the relevant triangles.

Cutting 2 1/2" Wide Strips:

1. Place two different fabrics right sides together. Straighten the raw edges of the fabric.
2. Place the straight side of the ruler on the fabric to cut the 2 1/2" wide strips. Line the fabric up to the 2 1/2" solid line on the ruler (Fig. 1) and then rotary cut along the straight edge to create a set of 2 1/2" wide strips.
3. Sew these two strips together – using a 1/4" seam – then press the seam toward the darker of the two fabrics. (Fig. 2)

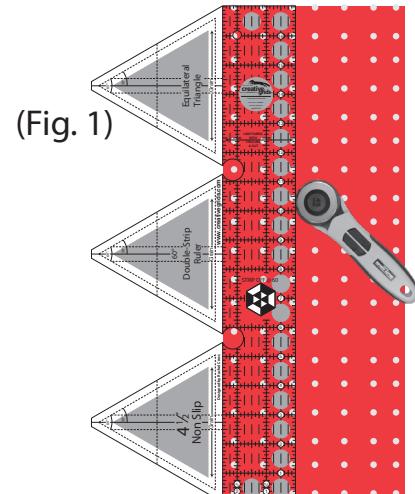

(Fig. 2)



Cutting 60° Triangles:

4. Turn-a-Round™ the ruler so that the triangles are pointing up or to the right as shown in Fig. 3, placing the dashed center line on the seam. All of the flat tops of the triangles should line up perfectly along the top edge of the two strips.

Note: You may find it more comfortable to have the ruler in a different position when cutting the triangles – see which way suits you.

5. Rotary cut along the diagonal sides of the triangles. The rotary cutter will extend beyond the fabric and into the circular cut-out area. Be careful not to cut into the ruler. You now have a row of pre-cut 60° triangles. (Fig. 4)
6. Sew six of these 60° triangles together to complete a 60° triangle hexagon. (Fig.5) For a scrappy look, cut and sew different fabrics into the strip sets.

Making Diamonds from Two Sets of Strips:

1. Following Steps 1 through 3 above, sew two sets of two – 2 1/2" strips together.
2. Place both sets of strips – right sides together – matching seams and reversing fabrics. Spray starch both sets of strips to reduce stretching once the diamonds are cut. Using this method, the outside edges of the piece will be on the bias.
3. Pin carefully to ensure that the center seams are together. Sew a scant 1/4" seam along the top and bottom of the two sets of strips to form a tube. (Fig. 6)
4. Place the 60° Double Strip Triangle Ruler on top of the pre-sewn tube placing the dashed line on the ruler on the center seam line of the tube as shown in Fig. 3.
5. When the pieces are cut, remove the few stitches along the pointed ends of the triangles and flip open the triangles (Fig. 7) to form a 60° diamond.

