

CHECKER MOTORS CORP. KALAMAZOO, MICH.

EFFECTIVE OCT 1, 1971

GRAPHIC ILLUSTRATION

DATE

4-28-71

MODEL:


B-11
B-12E
B-12W

DWN: DKK/TK
CHK: SS 10/71

SHEET NO. 128 A-1

DIMMER SWITCH INSTALLATION

1. 644279 SHIELD - DIMMER SW.
2. 701506 SWITCH ASM. - FOOT DIMMER
3. 120614 NUT *10-32 HEX. (2)
4. 120217 LW. *10 MED. SPRING (2)
5. ML-105 SEALANT

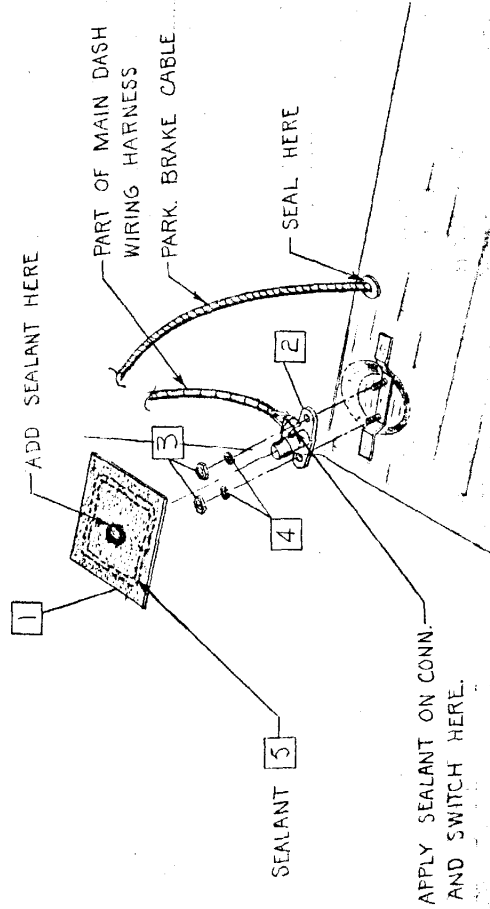

1. INSTALL WIRING CONNECTOR FROM MAIN DASH HARNESS TO DIMMER SWITCH.
2. INSTALL SWITCH TO FLOOR PAN BRKT. WITH REQ'D ATTACHING PARTS.
3. APPLY REQ'D AMOUNT OF SEALANT [5] AROUND WIRING CONNECTOR AT DIMMER SWITCH AS SHOWN.
4. APPLY REQ'D BEAD OF SEALANT AROUND EDGE OF SHIELD AND PLACE IN POSITION. ADD REQ'D AMOUNT OF SEALANT AROUND SWITCH.
5. APPLY REQ'D AMOUNT OF SEALANT AROUND PARKING BRAKE CABLE AS SHOWN.