



FASTRAK SERIES



FASTRAK


AVAILABLE DECK SIZES
48"- 60" 48"- 54" RD



FASTRAK SDX

AVAILABLE DECK SIZES
48"- 60"

FASTRAK

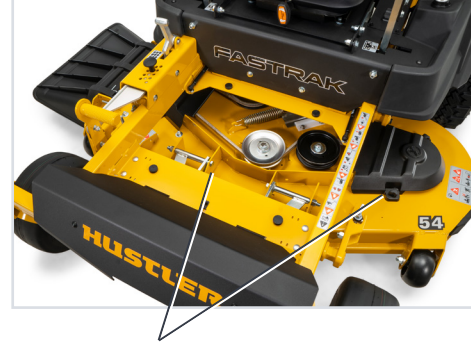

Easy Serviceability

Flip-up seat pan, removable floor pan and toolless removable pulley covers make maintenance easy and simple.

Heavy-Duty Deck Hangers

Commercial-grade, cast deck hangers for improved durability.

Welded Steel Deck

Durable 10 ga. welded fabricated steel.

SmoothTrak™ Steering

Precision control to help trim and maneuver easily around obstacles. Other brands have sensitive steering arms causing sudden and jerky movements.

Transmissions

Serviceable commercial-grade Hydro-Gear ZT-3200™

Magnetic Top Pin Deck Lift System

Adjust the deck height between 1.5" - 4.5" with your foot.

Dual Roto-Molded Fuel Tanks

8.5 gallon fuel capacity and dual fuel gauges.

Premium Suspension Seat


High-back seat with suspension to shield the operator from bumps and EVC cushion to take pressure off tail bone and lower back.

Commercial-Grade Kawasaki® FT Engine

With Vortical Air Filtration cleans debris to help extend engine life.

Less Clutter Under Seat

Provides better airflow keeping transmissions cooler.

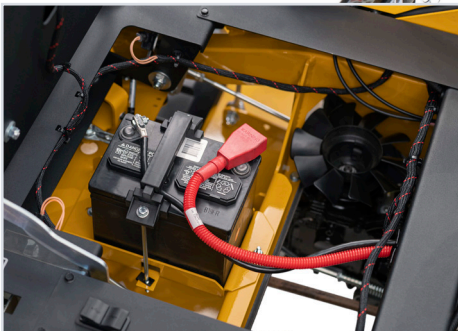

LIMITED
WARRANTY

4 YEAR | **750** HOUR

OTHER SERIES UPDATES



Front & Rear Tie Downs



Standard Dual USB Port



Standard Rubber Floor Mat

UPGRADES FOUND ON THE FASTRAK SDX

FASTRAK[®] SDX

- ✓ **Extra High-Back Suspension Seat**
Higher backrest and more bolstered back cushion.
- ✓ **Kawasaki[®] FX Engine**
Full commercial remote canister air cleaner
- ✓ **Larger Transmissions**
Hydro-Gear ZT-3400™
- ✓ **More Warranty Coverage**
4yr/1000hr compared to 4yr/750hr

SERIES ACCESSORIES

- ▶ Mulch kit
- ▶ Dump from seat bagger (8 bushels)
- ▶ Grass bagger (2-bag powered 7.2 bushels)
- ▶ Mesh side bagger (3 bushels)
- ▶ Steel side bagger (3.5 bushels)
- ▶ Steering lever extension kit
- ▶ Flex Forks[®]
- ▶ Light kit
- ▶ Stripe kit
- ▶ High vacuum kit

LIMITED WARRANTY
4 YEAR | **1000** HOUR



FASTRAK		FASTRAK SDX
ENGINE		
Manufacturer	Kawasaki FT series, KOHLER 7500 EFI	Kawasaki FX series
HP	48", 48" RD, 54", 54" RD deck: 22HP - FT691 54", 60" deck: 27HP - 7500 EFI 60" deck: 24HP - FT730 (Per SAE J1995)	48", 54" deck: 22HP - FX691 60" deck: 23.5HP - FX730 (Per SAE J1995)
Displacement	48", 48" RD, 54": 726cc FT691 54", 60": 747cc 7500 EFI 60": 726cc FT730	726cc
Cooling	Air cooled	
Engine Warranty	3-year	
DRIVE SYSTEM		
Type	Dual hydrostatic	
Transmission	Hydro-Gear ZT-3200™	Hydro-Gear ZT-3400™
Speed	Up to 10 mph	Up to 10 mph
Parking Brakes	Integrated into steering levers	
DECKS		
Cutting Width	Side discharge: 48", 54", 60" Rear-discharge: 48", 54"	Side discharge: 48", 54", 60"
Cutting Heights	1.5"- 4.5"	
Deck Lift	Foot operated	
Depth	5"	
Blades	3	
Blade Length	48", 48"RD: 16.50" 54", 54"RD : 18.50" 60" deck: 20.50"	48" deck: 16.50" 54" deck: 18.50" 60" deck: 20.50"
Blade Tip Speed	48", 48"RD: 18,600 54", 54"RD: 18,900 60": 18,400	48": 18,600 54": 18,900 60": 18,400
Spindles	Aluminum with 1" shafts and sealed ball bearings	
Drive	Electric PTO clutch	
Construction	Fabricated 10 ga.	
Spindle Mounts	Reinforced 11 ga.	
Impact/Trim Areas	11ga. formed channel with rolled edge	
CONSTRUCTION		
Frame	1.5" x 3" steel tubing	
Front Axle	Fabricated with sealed ball bearings	
Front Caster Wheels	Tapered roller bearings, grease-able	
Front Caster Forks	Fabricated 3/8" steel	
GENERAL		
Seat	High-back suspension seat	Extra High-back suspension seat
Fuel Capacity	8.5 gallons	
Cupholder	Yes	
Front Tire	13 x 6.5 - 6	13 x 6.5 - 6
Drive Tire	48", 48" RD: 23 x 9.5 - 10 BigBite™ 54", 54"RD, 60": 23 x 11 - 10 BigBite™	48": 23 x 9.5 - 10 BigBite™ 54", 60": 23 x 11 - 10 BigBite™
DIMENSIONS		
Weight	48": 910 lbs 48" RD: 924 lbs 54": 925 lbs 54" RD: 933 lbs 60": 944 lbs	48": 910 lbs 54": 925 lbs 60": 944 lbs
Height	45.5" 68.7 w/ ROPS up	48.9" 68.7 w/ ROPS up
Length	76.7"	76.7"
Width w/Chute	48": 50" 48" RD: 48.8" 54": 55" 54" RD: 54.8" 60": 61.1"	48": 50" 54": 55" 60": 61.1"
Tire Width	48": 47.5" 54" & 60": 51.5"	48": 47.5" 54" & 60": 51.5"
Trim Side	48": 0.6" 48" RD: 0.7" 54": 1.6" 54" RD: 1.6" 60": 4.6"	48": 0.6" 54": 1.6" 60": 4.6"
PRODUCTIVITY*		
Acres Per Hour	48" deck: 3.88, 54" deck: 4.36, 60" deck: 4.84	48" deck: 3.88, 54" deck: 4.36, 60" deck: 4.84

* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

** Specifications are subject to change without notice.