

ASSEMBLING THE LID OF THE MASTER-TOUCH GBS PREMIUM E-5770/75

BEFORE YOU START



Build the grill like any Master-Touch GBS
(NOTE: if you close the bowl vents, you won't lose the screws).




You should now have the bowl and lid fully assembled (apart from the hinge)


ASSEMBLING THE LID



1 These are the parts you should have for the hinge assembly: The assembled hinge with black knob, 2 metal plates, 2 screws and 6 nuts.

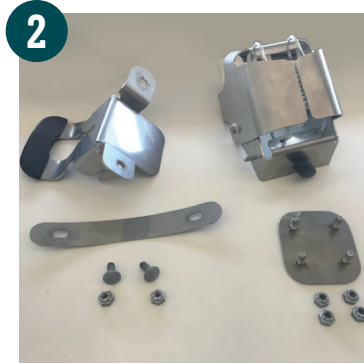


2 Unscrew the top part of the hinge (the part with the grip point) that goes on the lid, from the lower part (the part with the springs) that goes on the bowl.

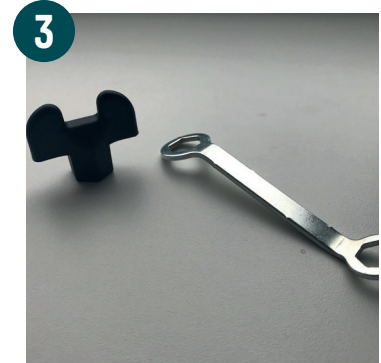

3 These are the tools, that are already included for an easy assembly of the lid. Alternatively you can use a size 11 flex wrench.

4

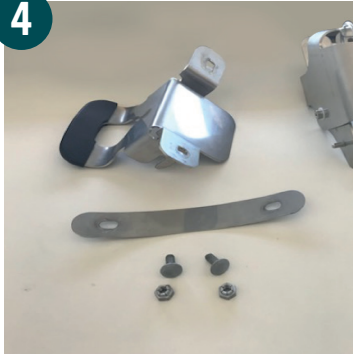

Take the lid and the hinge parts for the lid.

5



The lid plate backing goes inside the lid. Insert the screws from the outside (the U-shaped handle should face up, if the lid is turned around) and fully tighten the bolts from the inside.

6



The lid should now look like this and is ready to be slid on the hinge part in the bowl.

7



Take the bowl and the hinge parts for the bowl.

8



Insert the bowl plate backing from the inside of the bowl so the screws point outwards. Slide the bottom part of the hinge (black knob facing up) onto the screws and loosely tighten the bolts.

9



Here you can see the loose bolts: the hinge can easily be moved up and down along the slits for adjustment.

10



Slide the lid on the hinge. Leave the lid open.

11



Fully tighten the knob while the lid is still open.

12




Be sure that the lid is flat on the bowl. Keep lid closed and adjust lower hinge if necessary before tightening hardware. The trouble shooting is explained in the next points.

12A



If the lid stays open in the front, then the hinge needs to be lifted in the back (gently).

12B

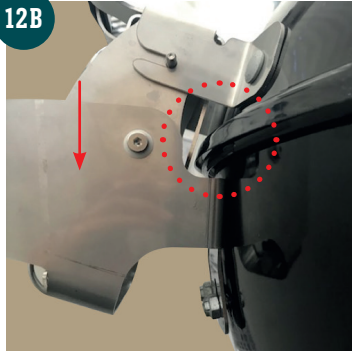

If the lid stays open in the back, then the hinge needs to be pushed down (gently).

13



Push down the lid with one hand to make sure it fits and tighten the bolts of the hinge now fully.