











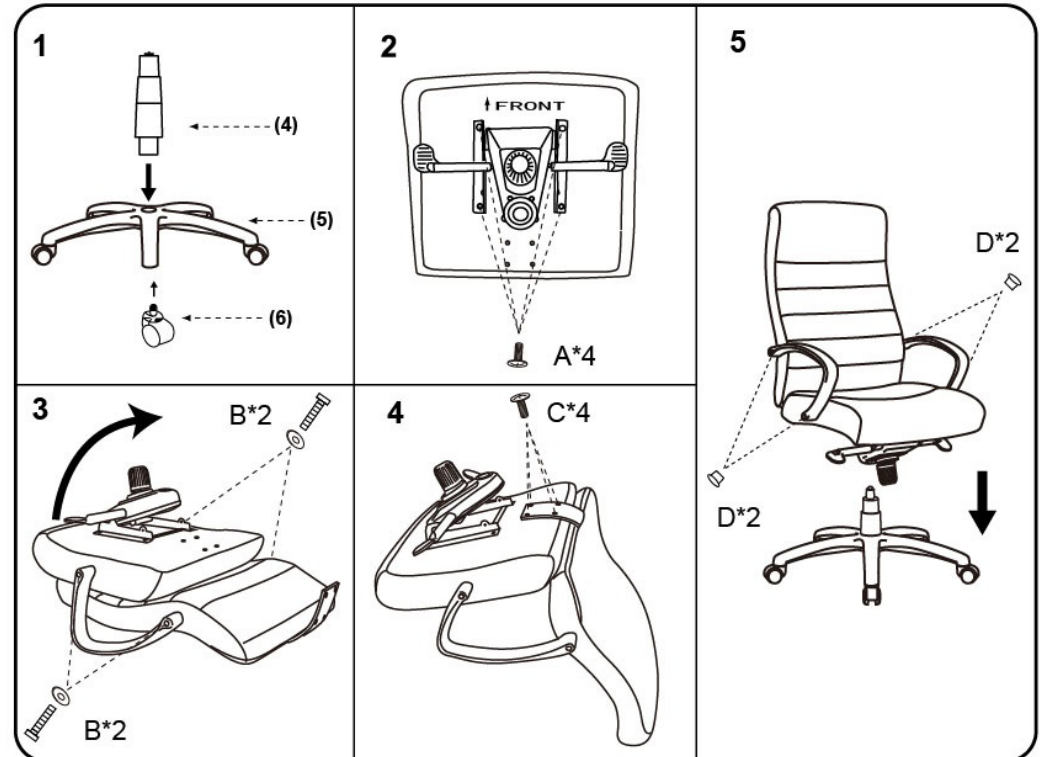


(1)X1	(2)X1	(3)X1 (L)X1 (R)
 Back Cushion	 Seat Cushion	 Left-Arm Right-Arm
(4)X1	(5)X1	(6)X5
 Gas Lift W/ Cover	 Base	 Caster
(7)X1	<p>(A)X4  M8*22 MECHANISM SCREW</p> <p>(B)X4  M8*45 ARM SCREW</p> <p>(C)X4  M6*30 L-BAR SCREW</p> <p>(D)X4  ARM CAP</p> <p>(E)X1  ALLEN KEY</p>	
 Mechanism		



Step 3: Do NOT tighten arm screws.
Step 5: Tighten arm screws before put on arm caps.



Insert and loosely tighten all screws. When assembly is completed, fully tighten all screws before using. This chair is only intended for sitting. Any other use will void the warranty.