




**OfficeSource®**  
FURNITURE

Model #: OSGS4032FRBK

Name: Jaden

Description: Guest Chair Sled Base

### Assembly & Operating Instructions

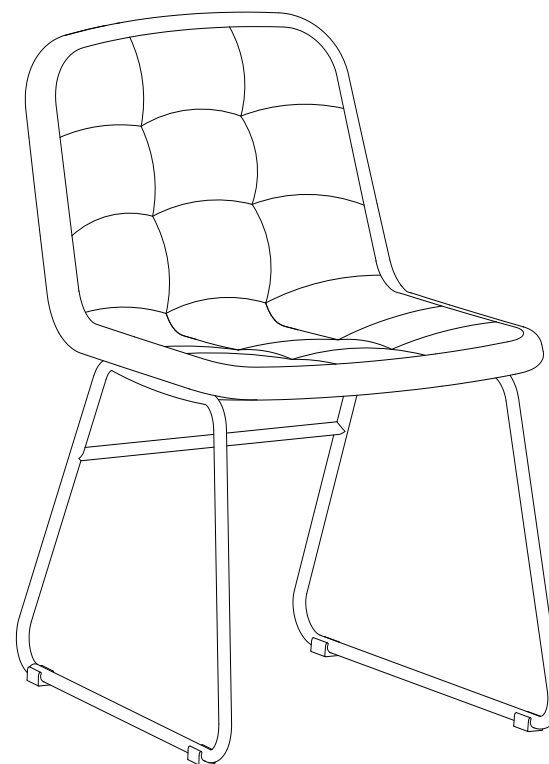

**OfficeSource®**  
FURNITURE

[officesourcefurniture.com](http://officesourcefurniture.com)

#### Customer Service

Tel: 800-388-8202 (Mon-Fri | 9am-5pm EST.)

Please read the instruction sheet(s) completely before assembly.


The maximum weight load is 300 lbs.

## Assembly Notes

1. After opening the carton, please carefully check for missing parts and transportation damage and if needed, contact dealer immediately.
2. Contact dealer if disassembly assistance is needed.

## Usage Notes



1. Intended for use indoors.
2. Intended for single person use.
3. Do not sit on end of chair to avoid accidental tipping and injury.
4. Do not step or stand on the chair – chair is intended for sitting only.
5. Do not lean against product – chair is intended for sitting only.
6. Avoid contact with sharp objects, heavy tools and hot surfaces.
7. As assembly may loosen overtime, for best user safety, conduct regular check of nuts and bolts to insure they are always tight and secure.
8. To clean, wipe with a soft and dry cleaning cloth. If there are stains on fabric, use a mild detergent to wipe clean.

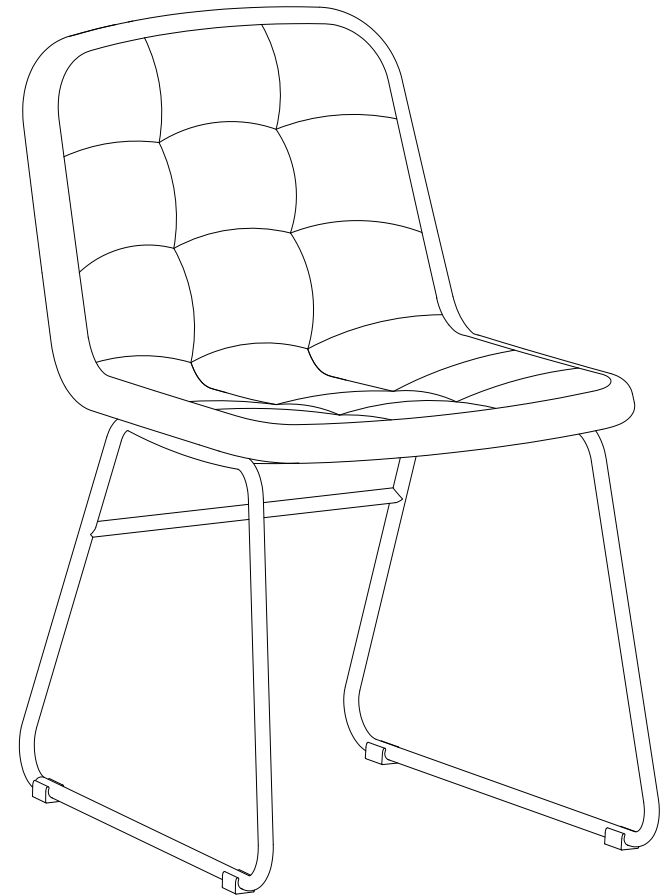







### Parts List

 OSGS4033ST (Sold Separately)	P1 x 1	 OSGS4032FRBK	P2 x 1
------------------------------------------------------------------------------------------------------------------------	--------	-----------------------------------------------------------------------------------------------------	--------


### Hardware List

	H1 x 4PCS 1/4X25mm		H2 x 1PC M4*59mm
--------------------------------------------------------------------------------------	-----------------------	---------------------------------------------------------------------------------------	---------------------



## Installation Steps

①

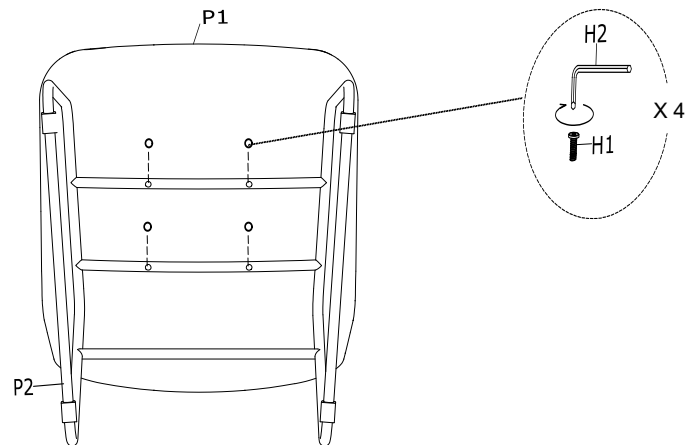

Attach OSGS4032FRBK(P2) to the bottom of the OSGS4033ST(P1). Insert Screws(H1) into the OSGS4032FRBK(P2) and tighten the Screws(H1) using Tool(H2).

②

