




KLIX CAM INSTRUCTIONS

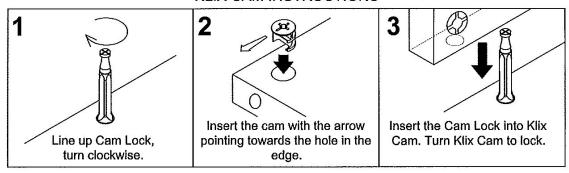




IMPORTANT NOTE:


- Place all wooden parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.
- Check to be sure that you have all parts and hardware.
- Remove all wrapping materials, including staples & packing straps before you start to assemble.
- Do not tighten all screws/bolts until all completely assembled.
- Keep all hardware parts out of reach of children.



Attach the Side Panel-S (2) and Bottom Panel (3) to Side Panel-B (1) by using Cam Lock (A) and Klix Cam (B).



Attach Top Panel (4) to Side Panel (1 & 2) by using Cam Lock (A) and Klix Cam (B).



Insert Center Shelve Pins(E) into the pre drilled holes and place Adj. Shelve(5) at convenient distances.

Peel off double sided foam tape, stick spacer panel (6) on Bottom Panel (3) and Adjustable Shelve (5).

