


KEY PLAN
NO SCALE

NOTES

- AS AN ALTERNATE FOR PLASTIC LAMINATES, THE GENERAL CONTRACTOR MAY PROVIDE THERMOFUSED MELAMINE PANEL AS MFG'D BY VENDOR #1. ALL PANEL COLORS MUST MATCH THOSE OF THE PLASTIC LAMINATE COLORS LISTED IN FINISH SCHEDULE. ALL PLASTIC LAMINATES AND MELAMINE FINISHES ARE MATTE (UNLESS OTHERWISE NOTED)
- SEE DETAILS OF TRANSITION STRIPS ON SHEET A5.0
- PAINT ALL EXPOSED SALES FLOOR CEILING AREAS (P-30) IN A FLAT FINISH. ALL EXPOSED DUCTWORK, WIRING, CABLES, ELECTRICAL BOXES, EMERGENCY LIGHT BRACKETS, ETC., IN THESE AREAS PAINTED TO MATCH.
- ALL EDGES OF ALL TRIM BOARDS AT EDGES OF SLATWALL THROUGHOUT STORE ARE TO BE PAINTED BLACK. ALL OTHERS TO MATCH FINISH ON FACE OF TRIM BOARDS.
- INSTALLATION OF SLATWALL TO ADHERE TO MANUFACTURERS RECOMMENDATIONS AND MAINTENANCE SPECIFICATIONS.
- NO COLOR OR MATERIAL SELECTIONS (INCLUDING FLOORING, CARPETING, PAINT, PLASTIC LAMINATE, METAL FINISHES, ETC.) ARE TO BE SUBSTITUTED WITHOUT PRIOR WRITTEN APPROVAL OF DICK'S.
- REFER TO SPECIFICATIONS FOR PAINT FINISHES OF ALL MATERIALS AND SURFACES.
- PAINT 2" GREEN STRIPE (P-34) IN ALL MAIN STOCK ROOMS & RECEIVING @ 15'-0" A.F.F. TO BOTTOM OF STRIPE AROUND ENTIRE PERIMETER, WORK ROOM (IF USED) AND GOLF STOCK STRIPE TO BE @ 12'-0" A.F.F.; ALL GYP. BD. WALLS IN STOCK AREAS TO HAVE LEVEL 2 FINISH ONLY. NO PAINT OTHER THAN THE STRIPE. REFER TO A11.0 FIXTURE PLAN.
- PAINT ALL WALL LOUVERS TO MATCH ADJACENT WALL FINISHES.
- PREPARE EXISTING AND NEW CONCRETE SLABS FOR INSTALLATION OF NEW WOOD, RESILIENT TILE, CARPET AND EXPOSED CONCRETE FLOORS. GRIND OFF ALL HIGH SPOTS. FILL ALL LOW SPOTS, HOLES AND CRACKS WITH CEMENT-BASED, POLYMER MODIFIED, SELF-LEVELING PRODUCT THAT CAN BE APPLIED IN THICKNESSES FROM 1/8" AND THAT CAN BE FEATHERED AT EDGES TO MATCH ADJACENT FLOOR ELEVATIONS. COMPRESSIVE STRENGTH NOT LESS THAN 4000 PSI.
- ALL MILLWORK TRIM TOUCH-UP TO BE BY G.C.
- PROVIDE 4" HIGH 3/4" PLYWOOD WAINSCOT IN STOCK ROOM (115 & 117), RECEIVING (116) BOPS STOCK (119) AND AROUND PERIMETER EVERYWHERE THERE IS NO SHELVING OR RACKING ON GYP. BD. WALLS. COORDINATE LOCATIONS WITH VENDOR #15.
- PAINT ALL SALES FLOOR COLUMNS P-163.
- REFER TO THE A12 SHEETS FOR EXTENT OF BASE 9-73.
- G.C. TO PAINT ALL EXPOSED SALES FLOOR CONDUIT, INCLUDING DROPS FOR BA & CCTV. CONDUIT PAINT COLOR TO MATCH ADJACENT SURFACE (WALL, CEILING, COLUMN, ETC.) DROPS SUSPENDED FROM CEILING ON SALES FLOOR AWAY FROM A VERTICAL SURFACE SHALL BE PAINTED TO MATCH CEILING.
- G.C. TO PREP ALL DRYWALL RECEIVING WC-6 AND GRAPHIC MURALS (WHERE NOTED ON THE A12 SHEETS) WITH A LEVEL 4 FINISH AND PRIMER/SEALER; SEE SPECIFICATION 10.1600.
- INSTALLATION OF FINISH FLOORING MUST BE COMPLETE BEFORE PERMANENT FIXTURES AND CASEWORK ARE INSTALLED (THIS INCLUDES PORTAL WALLS). THE INTENTION IS THAT FINISH FLOORING RUN UNDER FIXTURES AND CASEWORK AND TIGHT TO WALLS. FAILURE TO DO SO WILL RESULT IN THE GC AND/OR FLOORING VENDOR TO RETURN TO ADHERE TO THIS REQUIREMENT AT NO COST TO TENANT.




A2 ARCHITECTURAL FINISH FLOOR PLAN

SCALE 3/8" = 1'-0"

REFER TO SHEET A5.0 FOR FINISHES AS TAGGED ON PLANS


LEGEND

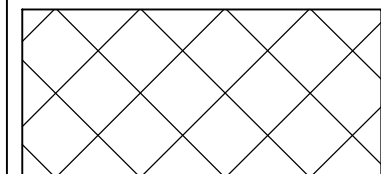

NO WORK IN THIS AREA

BORDER DETAIL D2 BIKES AND FSW

SCALE 1/2" = 1'-0"

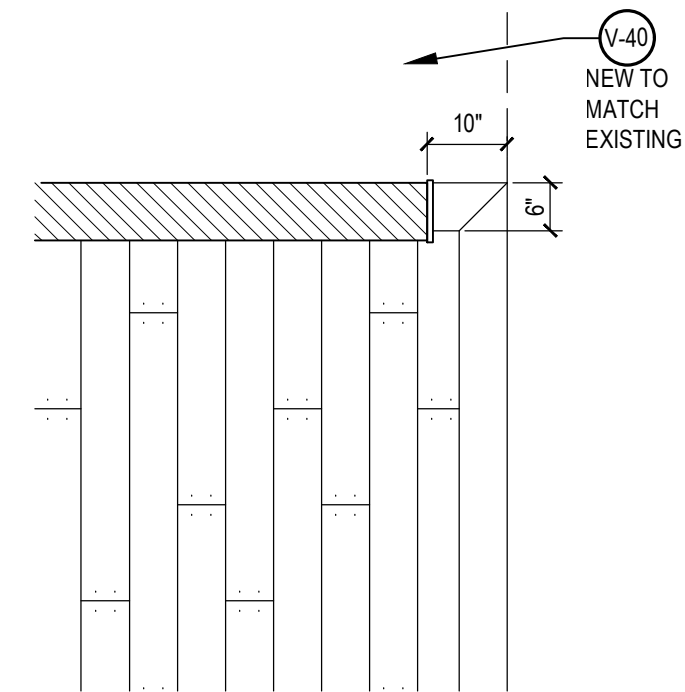

BORDER DETAIL D1 OUTDOOR & FSW

SCALE 1/2" = 1'-0"

