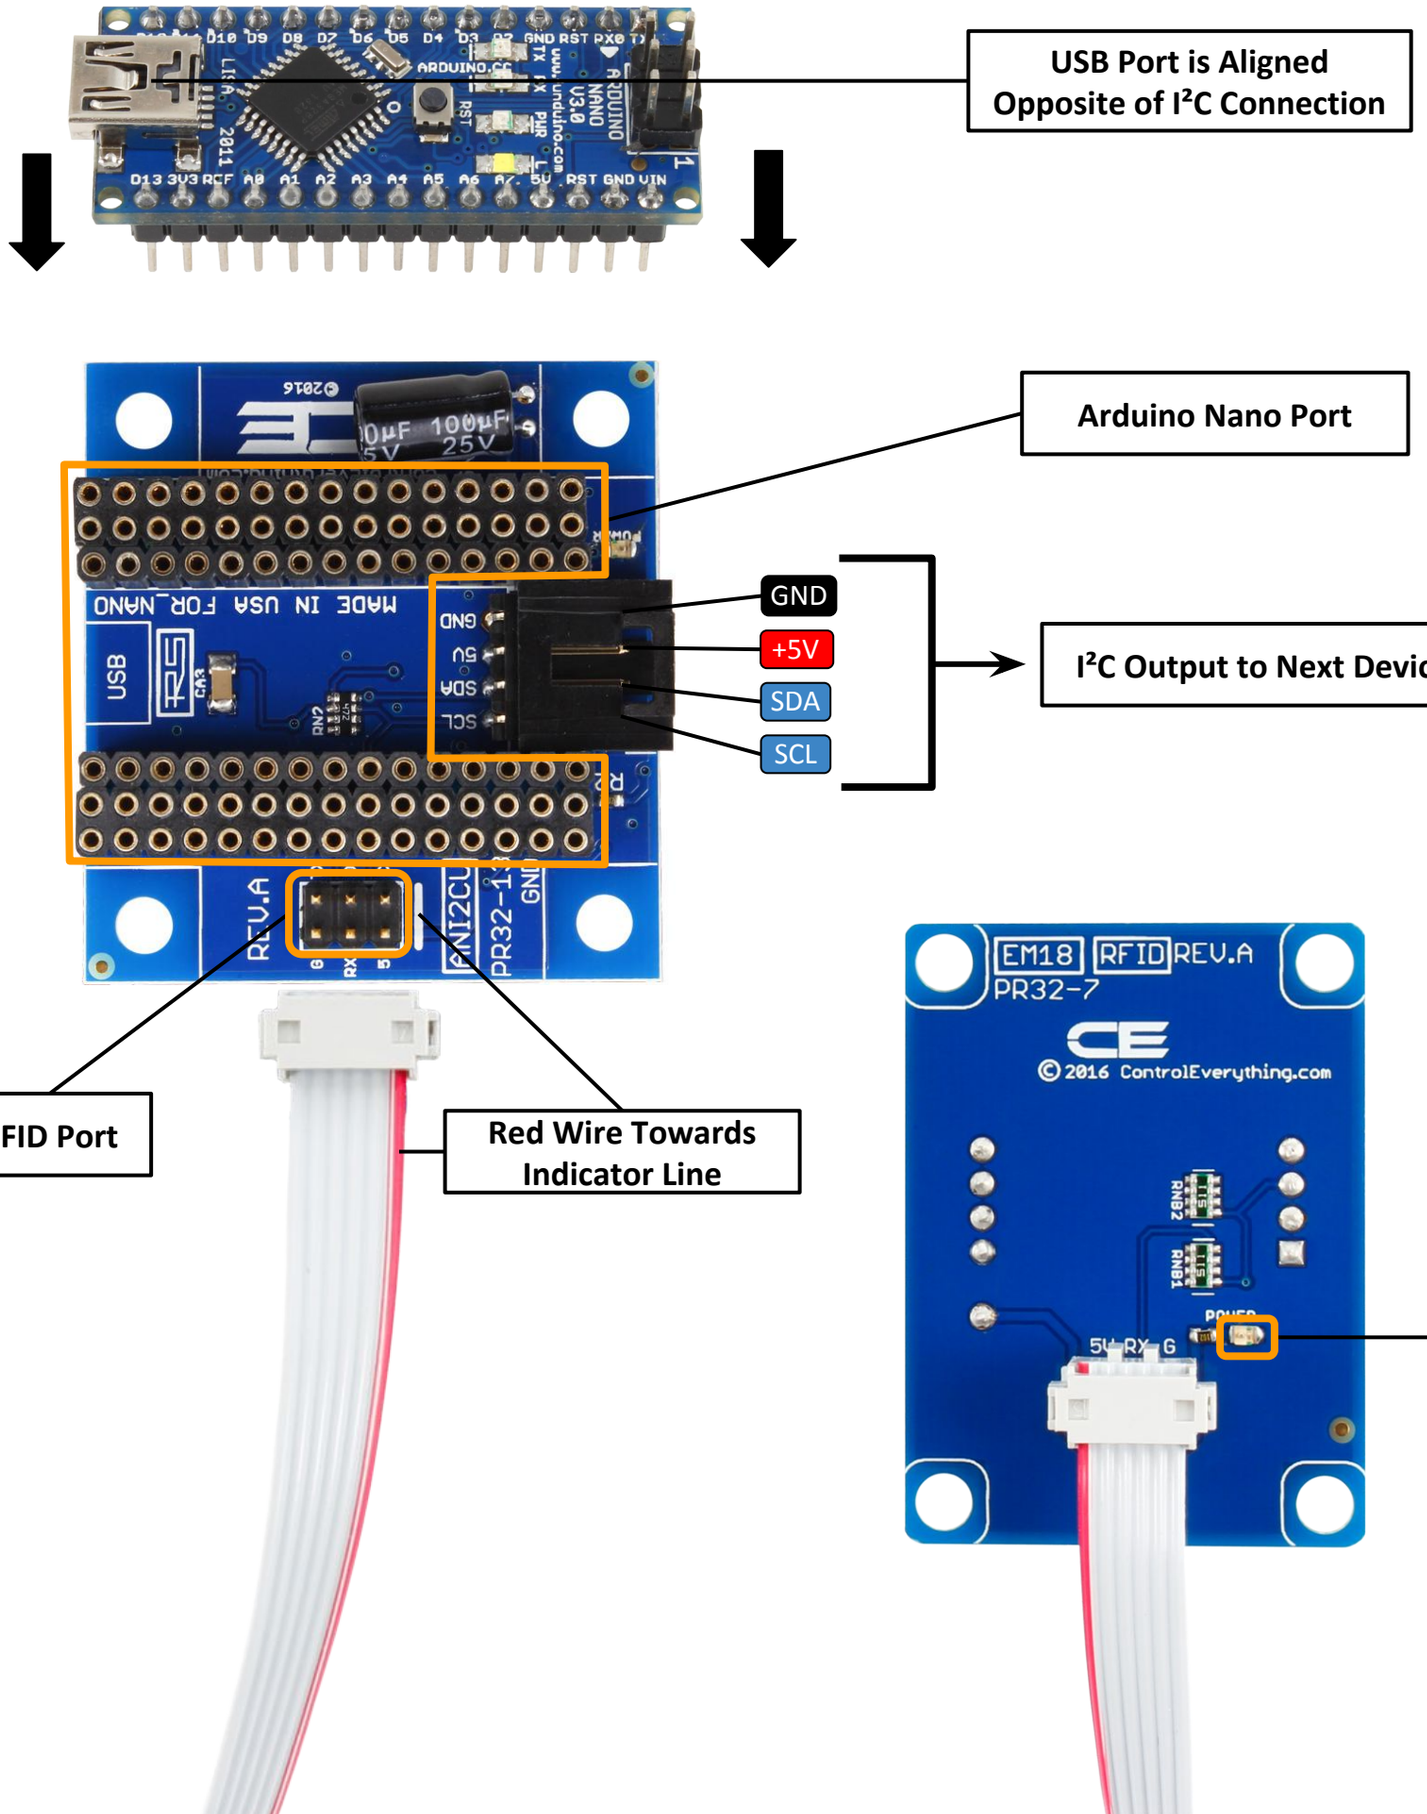
USB Port is Aligned Opposite of I²C Connection
Arduino Nano Port
GND
+5V
SDA
SCL
I²C Output to Next Device
RFID Port
Red Wire Towards Indicator Line
Power LED
EM18 RFID REV.A
PR32-7
© 2016 ControlEverything.com