



1

USE PHILLIPS HEAD SCREWDRIVER TO UNSCREW KNIFE

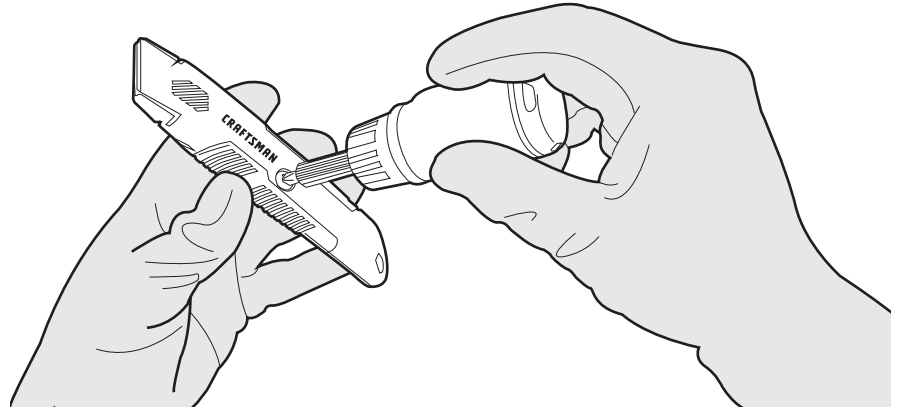


2

REMOVE TOP HALF OF KNIFE

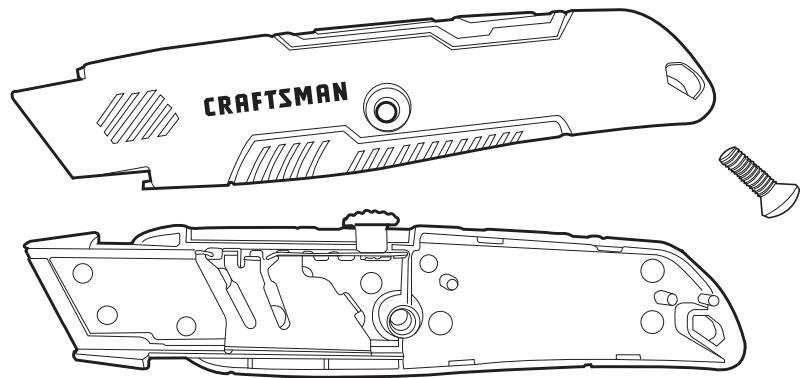

3

PLACE NEW BLADE INTO REMOVABLE TRAY BY  
SLIDING TOP OF BLADE UP AND UNDER THE METAL  
TABS SO BLADE LAYS FLAT

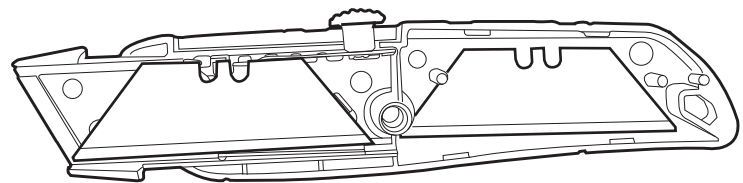

4

REPLACE TOP HALF OF KNIFE AND USE SCREWDRIVER  
TO SCREW KNIFE HALVES TOGETHER

