

Summary	Installing overload protection for System 4 controllers				
Products Affected	System 4 controller				
Key Word Tags					
Tools/Equipment (If Required)					
Parts/Materials (If Required)	H00142205 VOLTAGE MONITOR ASSY				
Related Media					
Author	M. Burzlaff Rev A 1/18	Issue Date	2/27/17	Status	Active

Please Read The Entire Bulletin Before Proceeding

This monitoring system is set up as to have a delay before power is reapplied after a voltage spike or loss. Any time power is applied after a loss there will be a 10 second delay before the contactor will allow the controller to energize.


Mount the Voltage Monitor to the wall next to the system 4 controller.




The disconnect must be in the OFF position and properly locked and tagged before performing the next step of the procedure.



Follow the wiring diagram below for the terminal connections and installation of the assembly.

SYSTEM 4 CONTROLLER

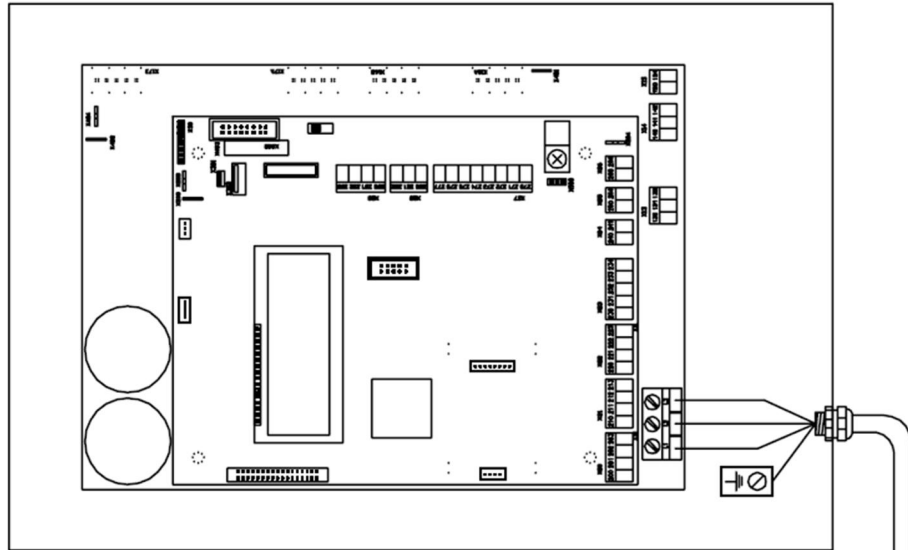

VOLTAGE MONITOR

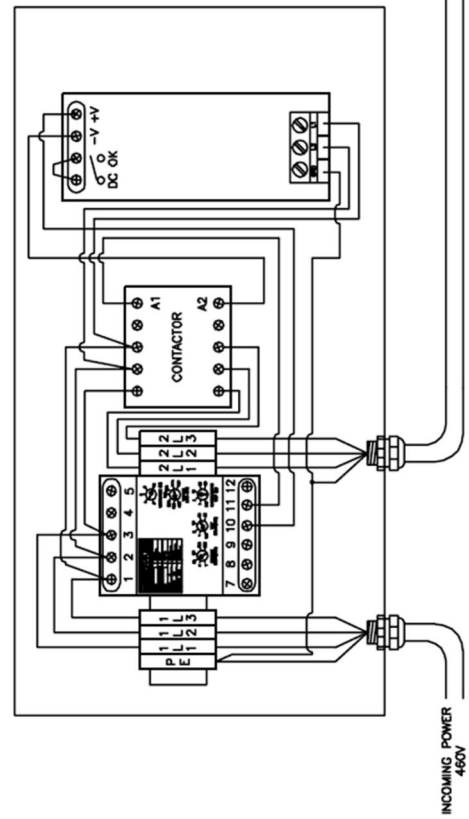

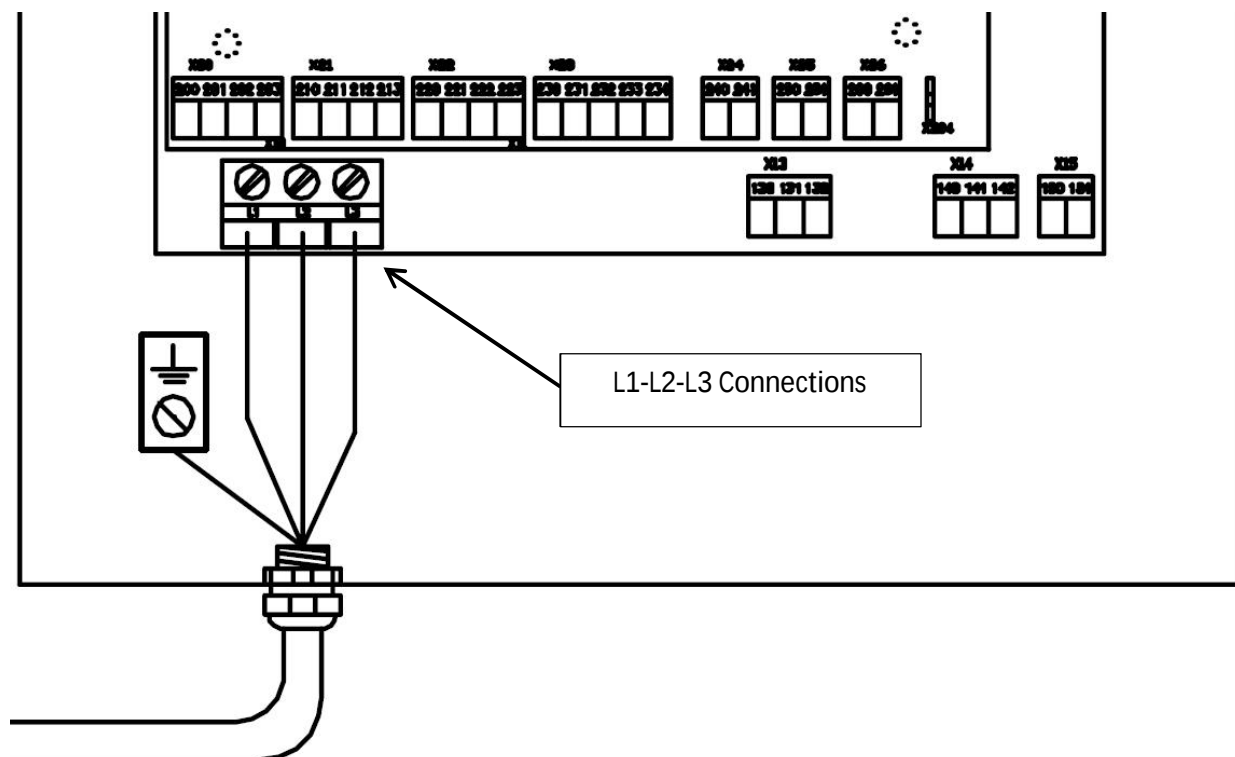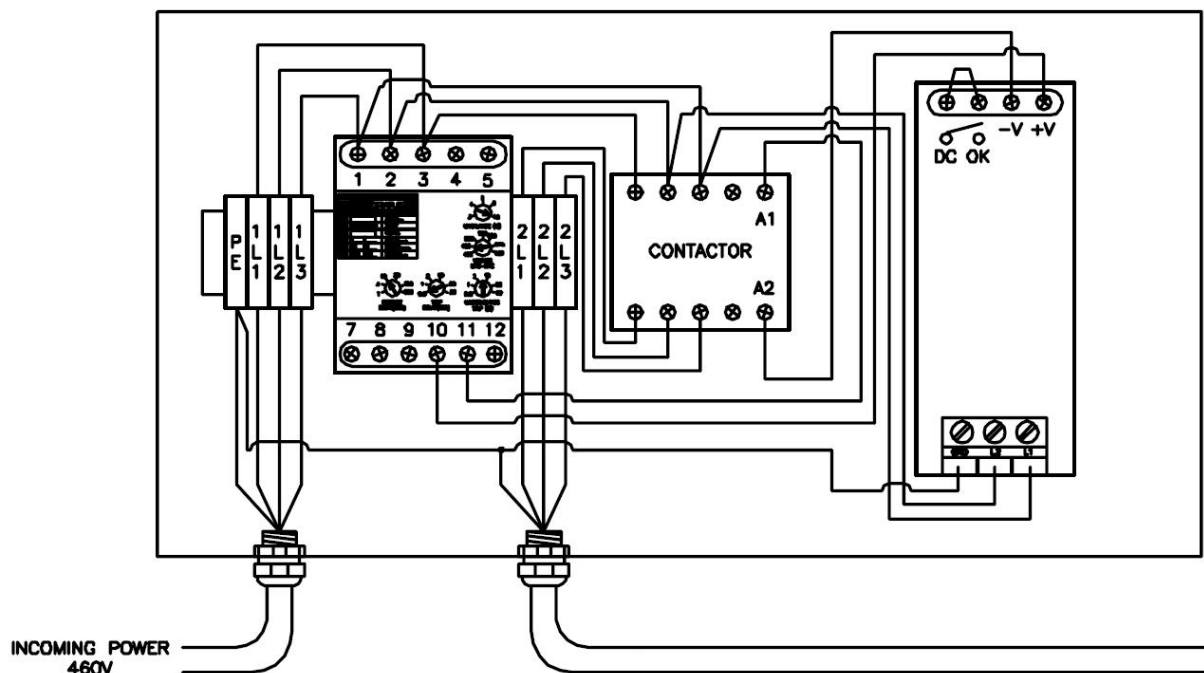

If you have any questions please contact Rytec Customer Support at 1-800-628-1909.