
Diesel Emissions Service

RETROFIT AND REPOWER SPECIALISTS

Portland | Redding | Oakland | Ontario

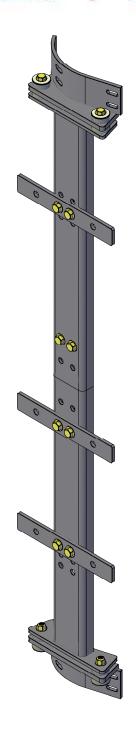

DES VM6501 PETERBILT 379 CAB MOUNT

ALL INSTALLATION INSTRUCTIONS AND GUIDELINES MUST BE THOROUGHLY READ AND UNDERSTOOD BEFORE INSTALLING A DIESEL EMISSIONS SERVICE PRODUCT



PRODUCT GUIDLINES

Diesel Emissions Service recommends its products be installed by a trained technician with proper tools and safety equipment. In addition all Diesel Emissions Service mounting brackets should be installed using good judgment and sound mechanical principles. Since all installations are unique, it is the sole responsibility of the installer to determine the best fit and function of the DPF mounting brackets.


PRODUCT SAFETY

Diesel Emissions Service products are designed for "ON-ROAD" applications only. Modifications to any Diesel Emissions Service product are not recommended and can compromise the bracket performance. Diesel Emissions Service claims no liability or responsibility for the improper application or installation of its products.

PRODUCT WARRANTY

Diesel Emissions Service warrants to the original purchaser of its products that such products will be free from defects in material and workmanship under normal use. Diesel Emissions Service's obligation under this warranty is solely and exclusively limited to repair and or replacement, at Diesel Emissions Service option, of the product (or components thereof) which Diesel Emissions Service's examination proves to its satisfaction to be defective. Diesel Emissions Service SHALL HAVE NO OBLIGATION FOR CONSEQUENTIAL DAMAGES TO PERSONAL OR REAL PROPERTY. OR FOR INJURY TO ANY PERSON.

This warranty does not apply to products which have been subject to improper use, accident, negligence, abuse or misuse.

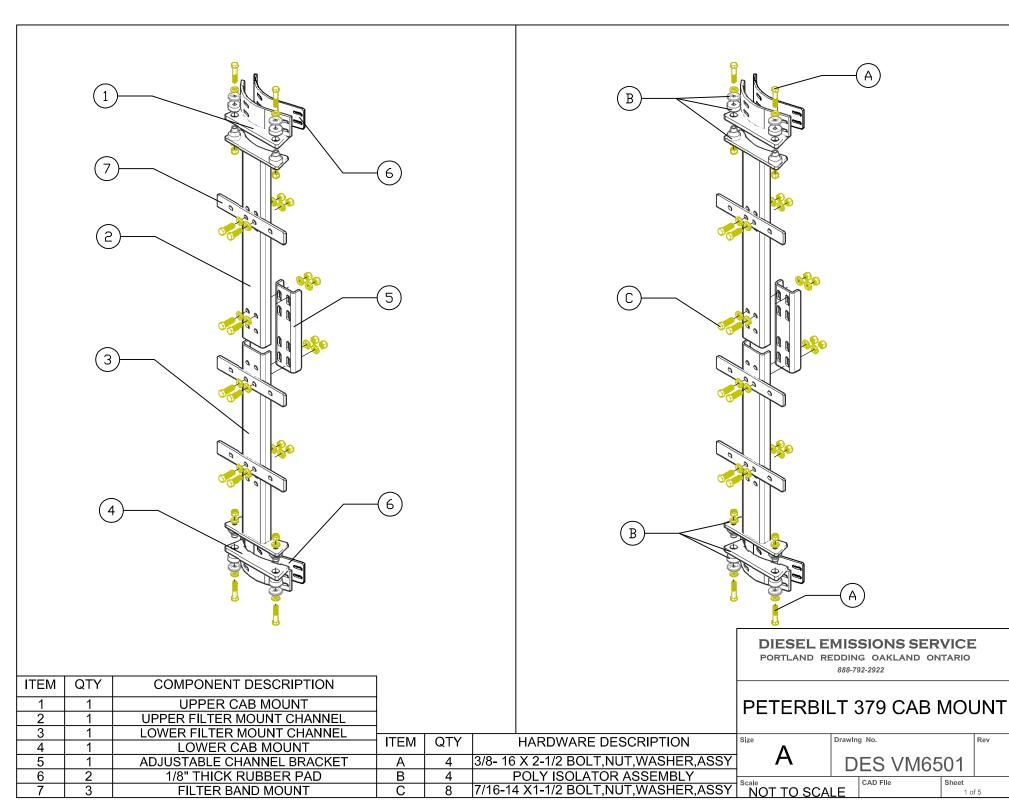



3

FILTER BAND MOUNT

 $\overline{\mathsf{c}}$


7/16-14 X1-1/2 BOLT, NUT, WASHER, ASSY

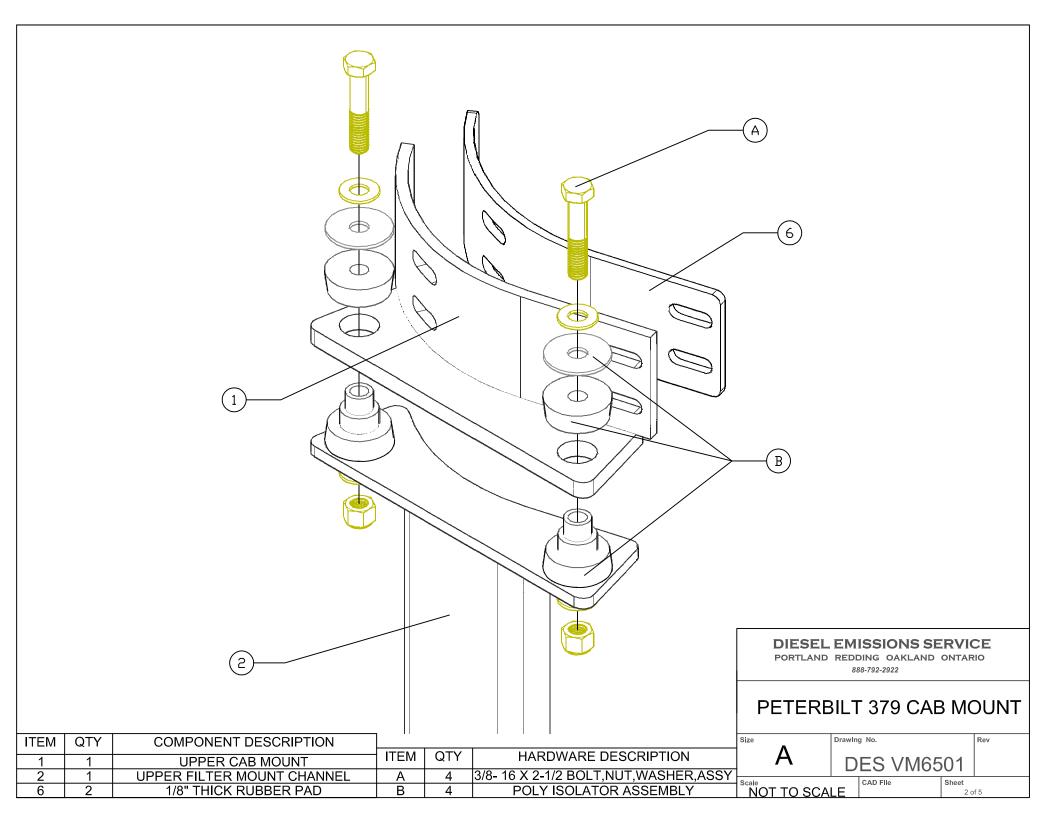

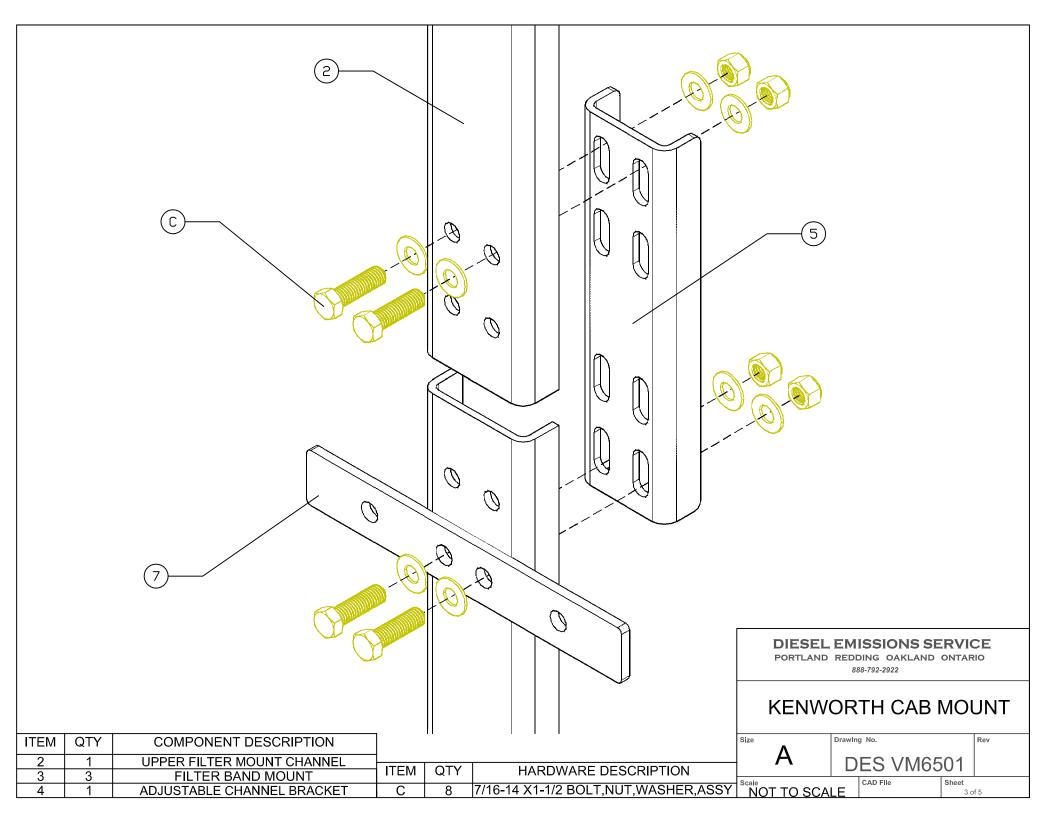

CORRECT A ISOLATOR ASSEMBLY (B) MUST BE COMPRESSED EQUALLY BETWEEN UPPER CAB MOUNT (1) AND FILTER MOUNT CHANNEL (2)

INCORRECT

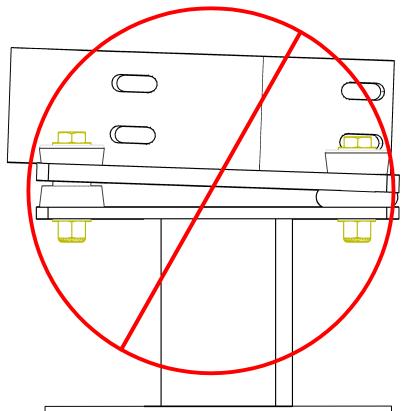

IMPROPER ISOLATOR COMPRESSION BETWEEN UPPER CAB MOUNT (1) AND FILTER MOUNT CHANNEL (2) CAN RESULT IN BRACKET FAILURE AND OR DAMAGE TO FILTER

DIESEL EMISSIONS SERVICE

PORTLAND REDDING OAKLAND ONTARIO 888-792-2922

Size

Drawing No.


DES VM6501

Scale NOT TO SCALE

Sheet 4 of 5

QTY QTY COMPONENT DESCRIPTION ITEM HARDWARE DESCRIPTION ITEM 3/8- 16 X 2-1/2 BOLT, NUT, WASHER, ASSY UPPER CAB MOUNT Α 4 POLY ISOLATOR ASSEMBLY UPPER FILTER MOUNT CHANNEL

CORRECT

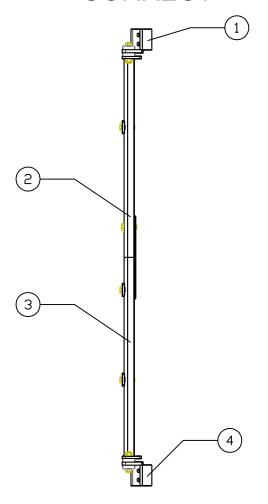

DES VM6500 MUST BE INSTALLED VERTICALLY AND PERPENDICULAR TO FRAME RAIL

ITEM QTY COMPONENT DESCRIPTION **UPPER CAB MOUNT** UPPER FILTER MOUNT CHANNEL 2 LOWER FILTER MOUNT CHANNEL 3 **LOWER CAB MOUNT**

INCORRECT





FAILURE TO PROPERLY INSTALL DES VM6501 CAN RESULT IN BRACKET FAILURE AND OR DAMAGE TO FILTER

DIESEL EMISSIONS SERVICE

PORTLAND REDDING OAKLAND ONTARIO 888-792-2922

DES VM6501

Scale NOT TO SCALE

Sheet

5 of 5