


# ASSEMBLY INSTRUCTIONS DOUBLE OVER SHELVES

250500 36"W  
250501 48"W  
250502 60"W  
250503 72"W

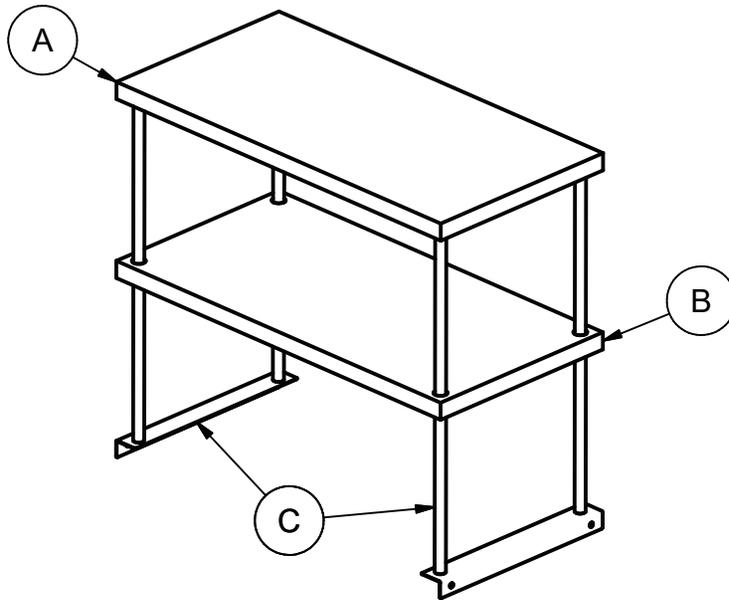

PARTS INCLUDED		
Item	Item #	Qty
A	Upper Shelf	1
B	Lower Shelf	1
C	Uprights	*2


HARDWARE INCLUDED			
Item	Item #	Qty	Description
D	Set Screw	**8	M8 x 8mm Allen Set Screws
E	Self-Tapping Screw	4	#10-16 x 3/4" Self-Tapping Screw
F	Bolt	4	1/4-20 x 1/2" Hex Head Bolt
G	Nut	4	1/4-20 Nut
H	Allen Wrench	1	4mm Allen Wrench




\*\*Note: 96" has qty of  
12 Set Screws

Turn over page for step by step instructions


1. Confirm all parts/hardware are included
2. Determine the height that you wish the lower shelf to be placed at and measure that distance up the left and right uprights. If you wish to change the height, the shelf may be adjusted after installation. Once the shelf is in its proper location, tighten in place with set screws and allen wrench that are provided.

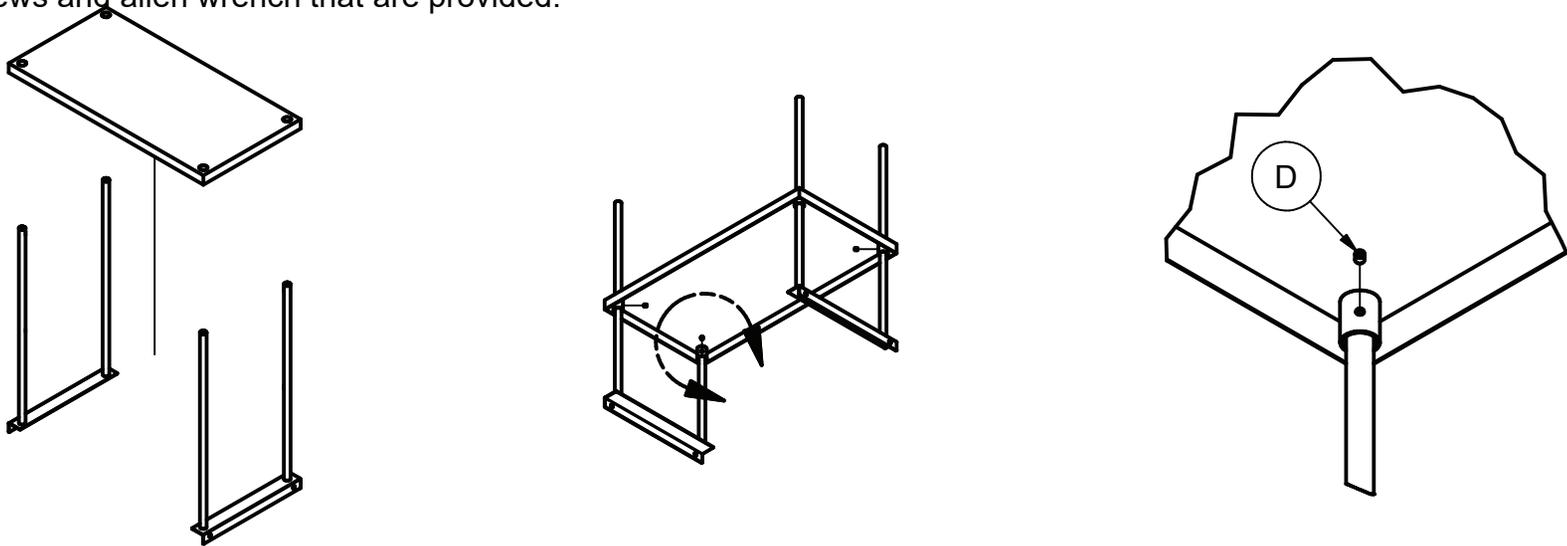


3. Place the upper shelf on the uprights and tighten the set screws, as was done on the lower shelf. Once all the screws are properly tightened, the shelf is ready to install on the table top.

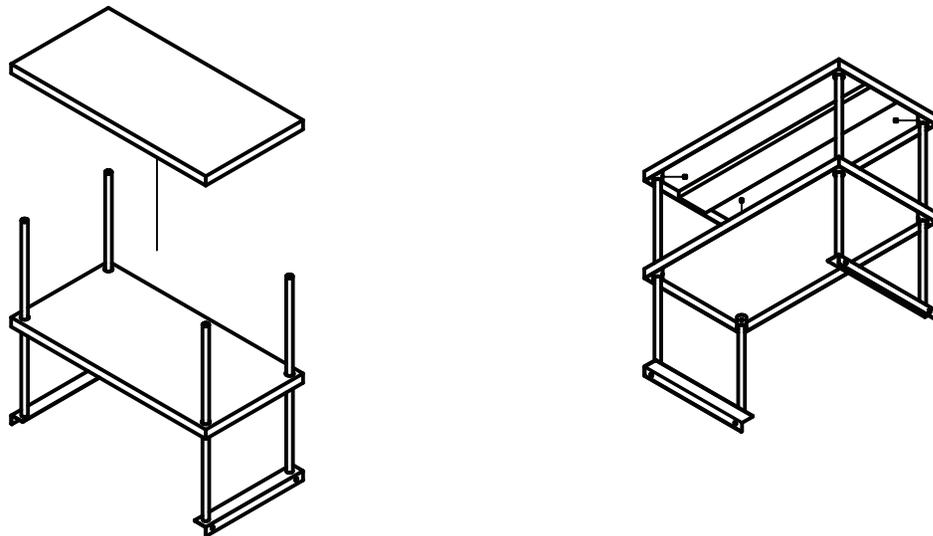

- Place the over shelf on the table with the angle brackets of the base resting on the top and outside of the table. Find the location of the shelf on the table where you wish the shelf to remain as it cannot be moved.
- Use included hardware to attach the over shelf on the table edge. This can be accomplished by using the self-tapping screws or nuts and bolts that are included. If you choose the nuts and bolts, pilot holes must first be drilled. The minimum diameter for the pilot hole to allow the bolt to pass thru is 1/4" or 6mm. The maximum diameter is 5/16" or 8mm.

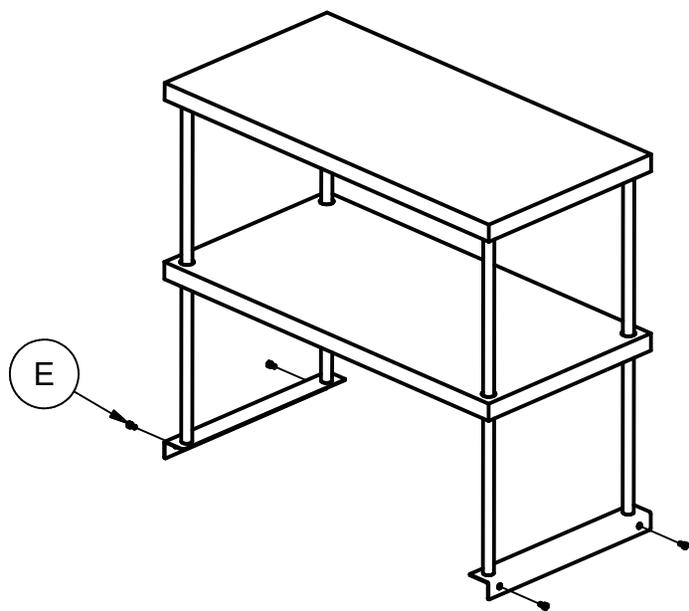

Socket needed for self-tapping screw: 5/16" or 8mm

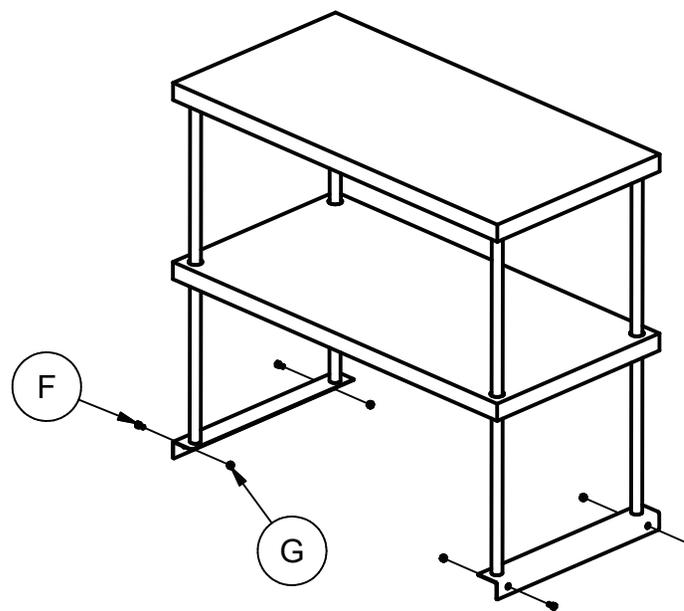

Sockets or wrenches needed for nuts and bolts: 3/8" or 10mm