



UDM-525

SPECIFICATIONS

TYPE: MOVING COIL DYNAMIC MICROPHONE

CHARACTERISTICS: UNI DIRECTIONAL

IMPEDANCE: 600 ohm $\pm 30\%$ AT 1,000 Hz


SENSITIVITY: 74 ± 3 dB AT 1,000 Hz

FREQUENCY RESPONSE: 70 14,000 Hz


CABLE: 5.5 MM x 15 FEETS WITH 6.3 MM PHONE PLUG

WEIGHT: 350 GRAMS WITHOUT CABLE AND BOX

FREQUENCY RESPONSE CURVE

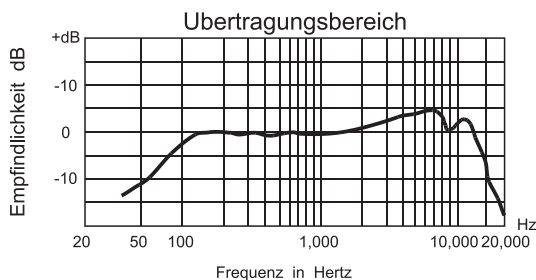

Richtcharakteristik

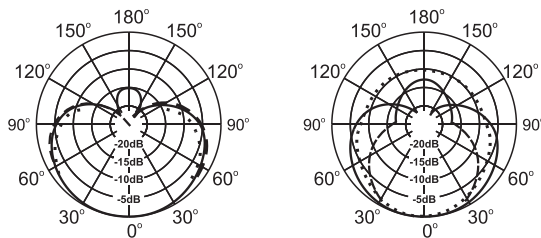

— 250 Hz
- - - 500 Hz
- - - 1000 Hz

— 2500 Hz
- - - 6300 Hz
- - - 10000 Hz

