

8. (if applicable) Be careful not to damage the power cord. When moving or not using the appliance, secure the power cord (e.g., wrap it with a cable tie). Before using it again, make sure the power cord has not been damaged. If the power cord has been damaged at all, bring the unit and cord to a qualified service technician for repair or replacement as specified by the manufacturer.

9. Unplug this apparatus during lightning storms or when unused for long periods of time.

10. Only use attachment/accessories specified by the manufacturer.

11. (If applicable) Use only the cart, stand, tripod, bracket or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.

12. Internal/External Voltage Selectors (if applicable): Internal or external voltage selector switches, if any, should only be reset and re-equipped with a proper plug for alternative voltage by a qualified service technician. Do not attempt to alter this yourself.

13. **Caution** (if applicable): Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type. Batteries (a battery pack or an installed battery) shall not be exposed to excessive heat such as sunshine, fire, etc.

14. (If applicable) Do not defeat the safety purpose of the polarized or grounding-type plug.

15. Protective earthing terminal (if applicable): The apparatus should be connected to a mains socket outlet with a protective earthing connection.

- Denmark (*Danmark*): Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.
- Finland (*Suomi*): Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan.
- Norway (*Norge*): Apparatet må tilkoples jordet stikkontakt.
- Sweden (*Sverige*): Apparatens skall anslutas till jordat uttag.

16. **For Class II apparatus only:** This symbol means the equipment is a Class II or double-insulated electrical appliance. It has been designed in such a way that it does not require a safety connection to electrical earth.



When servicing use only identical replacement parts installed by an instructed person or with the use of ready-made leads or cords.

17. **Warning** (if applicable): Provide an earthing connection before the mains plug is connected to the mains. When disconnecting the earthing connection, be sure to disconnect it after pulling the mains plug out from the mains.

18. (If applicable) Where the mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.

19. **Warning** (if applicable): To prevent possible hearing damage, do not listen at high volume levels for long periods.

20. This apparatus is for professional use only. Intended operational climate: moderate.



FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



General Note on the Declaration of Conformity: We hereby declare that this device is in accordance with the essential requirements of the European Directive 2014/53/EU or 2014/30/EU (LVD: 2014/35/EU; GPSD: 2001/95/EC).




DIO16

DIGITAL SNAKE SYSTEM



User Manual

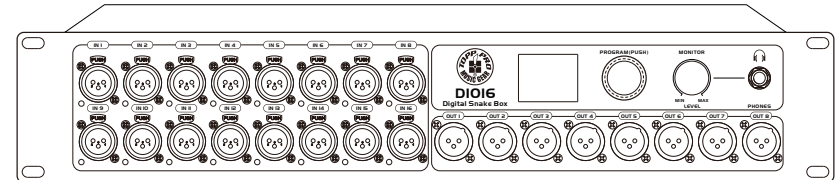

Introduction

Thank you to purchase our product. The model works as a digital audio expansion system which can achieve over 100-meter communication distance with CAT5 cable or over 1000-meter communication distance using fiber optic cable. It's birth overcome completely the shortcoming of audio distortion caused by sending analog signal to bring you high-quality, low-noise and real-time uncompressed digital audio via a standard Ethernet network.

It is easy for user to setup related parameters such as ID, Pre gain, 48V phantom power, mute, volume and so on by LCD screen.

It is recommended that you read the manual of this machine carefully before use in order to familiarize yourself with the features applications and operation procedures and avoid some problems during further installation and operations.

Features

- 16 MIC analog inputs / 8 XLR analog outputs.
- Left/right channel headphone output
- 48V phantom power control and power indicator.
- 0dB~50dB input digital gain control.
- 128RGBx160 Resolution and 65K color
- 100~240V wide voltage switching power.
- Network port, used to connect to PC/ios/Android operating system to control APP.

Hookup Diagram



Technical Specification

Frequency Response	22Hz~20KHz at 0dBu +1/-2.5dB
Distortion(THD&N)	<0.03% at 0dBu 1KHz
SNR(Signal to Noise Ratio)	107dB
Maximum XLR Outputs Level	+20dBu ±0.5dB
Phantom Power	+48VDC
EIN(Input noise)	125dB
Maximum HeadPhones Output Level	+20dBu ±0.5dB
Input to Output Crosstalk (at +0dBu 1KHz)	<-105dBu
Adjacent Channels Crosstalk (at +0dBu 1KHz)	<-105dBu
Bus Noise	<-89dBu
ADC Dynamic Range	113dB
DAC Dynamic Range	113dB
Internal Processor	32-bit , floating point
ADC bit depth	32bit
DAC bit depth	24bit
Input Impedances	6.8KΩ
Output Impedances	120Ω
operating free-air temperature range	0~40 °C
storage temperature range	-20 °C~60 °C

Important Safety Instructions



ATTENTION: RISQUE DE CHOC ÉLECTRIQUE NE PAS OUVRIIR.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE

AVERTISSEMENT: NE PAS EXPOSER CE MATERIEL À LA PLUIE OU L'HUMIDITÉ AFIN DE RÉDUIRE LE RISQUE D'INFLAMMATION OU DE CHOC ÉLECTRIQUE



This symbol, wherever used, alerts you to the resence of un-insulated and dangerous voltages in the product enclosure. These are voltages that may be sufficient to constitute the risk of electric shock or death.



This symbol, wherever used, alerts you to important operating and maintenance instructions. Please read.



Protective Ground Terminal



AC mains (Alternating Current)



Hazardous Live Terminal

ON: Denotes the product is turned on.

OFF: Denotes the product is turned off.

CAUTION

Describes precautions that should be observed to prevent damage to the product.



Warning! This symbol indicates a hot surface. Certain parts of the housing can become hot during operation. After use, wait for a cool-down period of at least 10 minutes before handling or transporting the device.



Warning! This device is designed for use below 2000 metres in altitude.



Warning! This product is not intended for use in tropical climates.

1. Read and keep these instructions. Heed all warnings and follow all instructions.
2. **Warning** (if applicable): Please refer to any important information (e.g., electrical, safety, etc.) printed on the exterior bottom enclosure or rear panel before instaling or operating the product.
3. Clean only with dry cloth.
4. **Water and Moisture** (if applicable): Do not use this apparatus near water. The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus. Electrical equipment should NEVER be kept or stored in damp environments.
5. (If applicable) Do not block any ventilation openings. install in accordance with the manufacturer's instructions. Do not install this equipment in a confined or "boxed-in" space such as a bookcase or similar unit, and maintain good ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, tablecloths, curtains. etc.
6. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat. Do not place exposed flame sources such as lighted candles on the apparatus.
7. (If applicable) This product should be connected to a power supply only of the type described in these operating instructions, or as marked on the unit.

CAUTION : Risk of fire or explosion if the battery is replaced by an incorrect type

ATTENTION : Risque d'incendie ou d'explosion si la batterie est remplacée par un type incorrect

WARNING: Remove batteries if exhausted or if they will not be used again for a long period.

- The incorrect use of batteries can cause electrolyte leakage and will corrode the compartment or cause the batteries to burst, therefore:
- Do not mis battery types, e.g. alkaline with zinc carbonate.
- When inserting new batteries, replace all batteries at the same time.



Dispose of this product should not be placed in municipal waste and should be separate collection.

Service Instructions

- Refer all servicing to authorized service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operaten normally, or has been dropped.
- Disconnect power cord before servicing.
- Replace critical components only with factory parts or recommended equivalents.
- For AC line powered units: Before returning repaired unit to user, use an ohmmeter to measure from both AC plug blades to all exposed metal parts. The resistance should be more than 2,000,000 ohms.