

Your configured part number: PN

Features and Benefits

- Low Cost Directional Control:
- Available in a variety of configurations and port sizes
- High air flow and fast response time
- Multiple Configurations Available:
- Single or double solenoid configurations
- Ideal for powering double-acting cylinders
- Three position models:
- Double solenoid operation, spring center
- Available in closed-center or exhaust-center configurations
- Rugged and Simple Design:
- Compatible with MFD manifolds
- DIN Connector and manual override included

Engineering Specifications

Pressure Rating: 22 to 120 PSI

Temperature Range: 23° F (-5° C) to 140° F (60° C)

Media: Air

Actuation: Internally piloted **Lubrication:** Not required

Service and Design Capabilities


- Contact Mead for any special valve need
- Experienced application engineers are available to provide complete pneumatic circuit solutions
- A full line of products including air preparation, valves, actuators, and specialty components are available
- Fast shipping and helpful customer service
- Custom design capabilities to meet your needs
- Call (877) MEAD-USA (877-632-3872)

Bimba Manufacturing Company Monee, IL 60449-0068 Telephone: 708.534.8544 Toll Free: 800-44-BIMBA Email: cs@bimba.com

Leaders in Actuation.



www.bimba.com

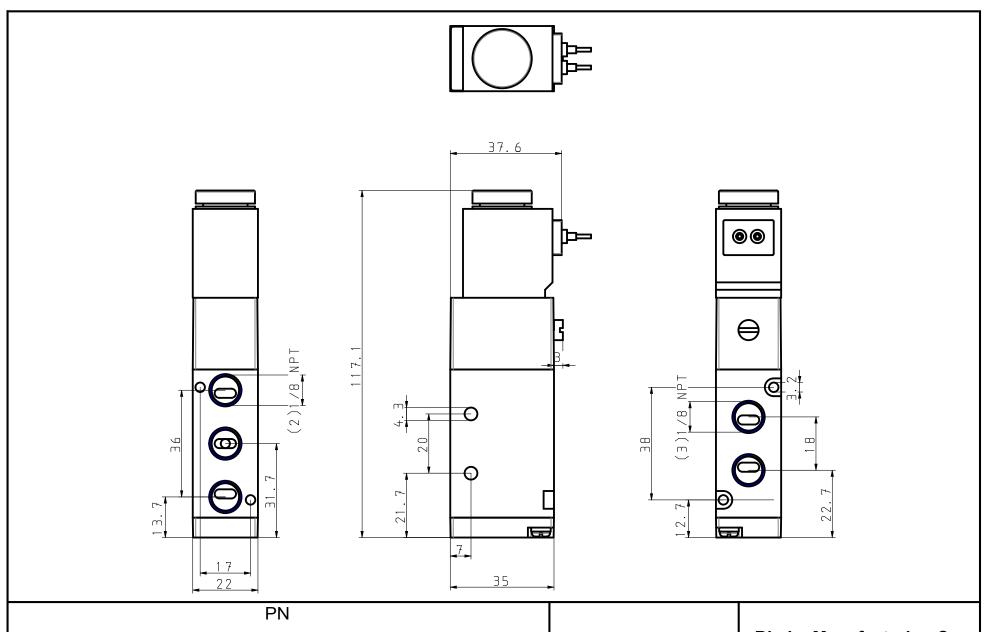

THIS DRAWING CONTAINS PROPRIETARY DESIGNS AND/OR INFORMATION OF BIMBA MFG. CO. OR ITS SUBSIDIARIES AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED OR DISCLOSED WITHOUT WRITTEN PERMISSION OF BIMBA MFG. CO. OR ITS SUBSIDIARIES. DESIGN REFLECTS OUR BEST ENGINEERING OPINION BASED ON WRITTEN APPLICATION SPECIFICATIONS RECEIVED. SUITABILITY OF A DESIGN FOR AN APPLICATION REQUIRES ANALYSIS AND/OR TESTS IN YOUR SPECIFIC SYSTEM.





Bimba Manufacturing Co.

Monee, IL. 60449

(800) 442-4622

www.bimba.com

PROPRIETARY DRAWING - Reference Only