



QTY SYM.

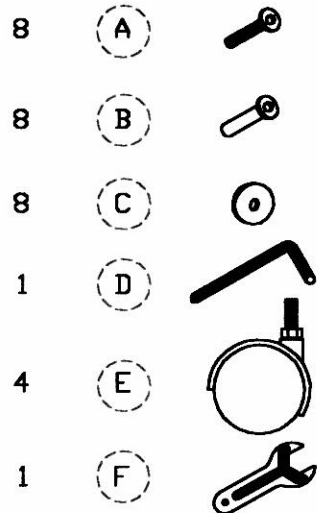

EASEL ON WHEELS ASSEMBLY INSTRUCTIONS


NOTE:

REQUIRES TWO PEOPLE
TO ASSEMBLE THIS EASEL.

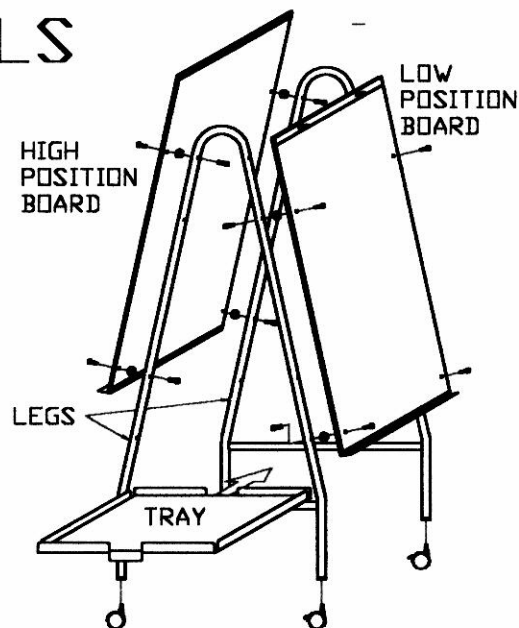


STEP ONE

- INSERT BOLT (A) IN TOP HOLES OF ONE OF THE BOARDS.
- PLACE FLAT WASHERS (C) ON BOLT (A) FROM THE BACK.
- AT THIS POINT YOUR PARTNER IS HOLDING THE LEGS.
- HANG THE BOARD FROM BOLTS THROUGH TOP HOLES IN LEGES FOR HIGH POSITION OR NEXT HOLE LOWER FOR LOWER POSITION.
- FASTEN THE BOLTS (A) TO THE LEGS, AND INSERT NUTS (B) USING ALLEN WRENCH (D).



STEP TWO

- INSERT BOLT (A) IN BOTTOM HOLES OF THE BOARD.
- PLACE FLAT WASHERS (C) ON BOLT (A) FROM THE BACK.
- FASTEN BOLTS TO THE LEGS AND INSERT NUTS (B) USING ALLEN WRENCH (D).
- AT THIS POINT, YOUR PARTNER CAN RELEASE THE LEGS.




STEP THREE

- FOLLOW STEPS ONE AND TWO TO INSTALL THE OTHER SIDE OF EASEL

STEP FOUR

- LAY THE EASEL ON ITS SIDE.
- INSERT CASTERS (E) USING FLAT WRENCH (F) FOR TIGHTENING.

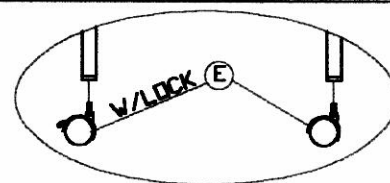

STEP FIVE

- RETURN EASEL TO UPRIGHT POSITION.
- MAKE SURE ALL INSERT NUTS ARE TIGHT.
- SLIDE THE TRAY FROM THE SIDE OF EASEL UNTIL IT SITS SECURELY ON THE HORIZONTAL BAR ON LEGS.

