


HANGRAIL ASSEMBLY

Illustration 1

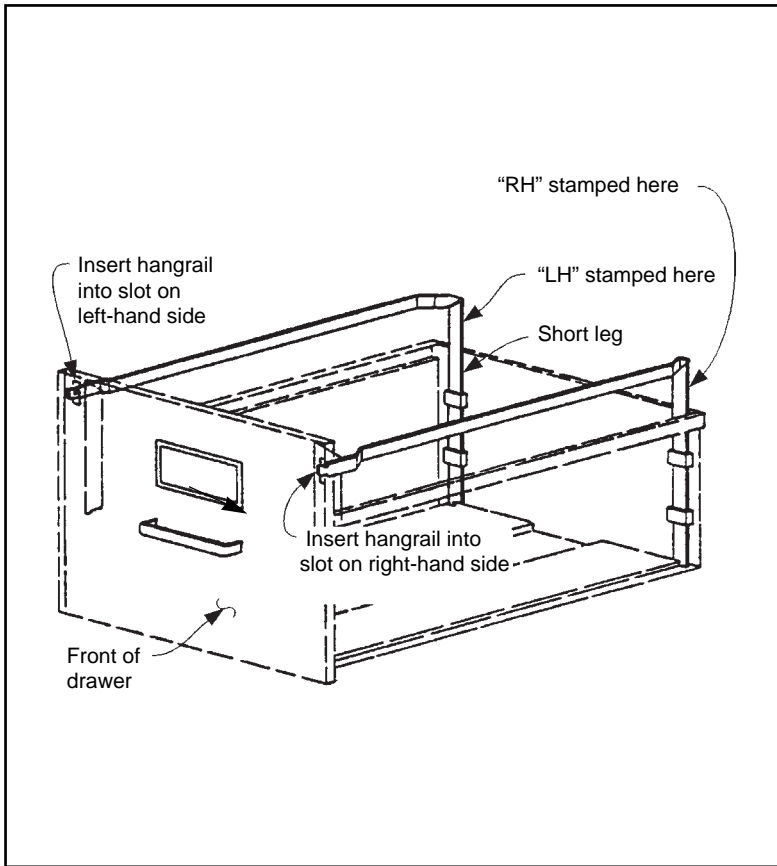

Read all instructions and review illustrations before installing.

Tools required for assembly:
None

This assembly includes:
(1) “RH” hangrail
(1) “LH” hangrail

⚠ WARNING

Removing a loaded drawer can cause the cabinet to tip and fall. To avoid injury, empty contents of drawer before removing from cabinet.

Sharp edges may cause injury. Take care when handling metal parts.

Installation (refer to Illustration 1):

1. Remove contents from drawer.
2. Remove drawer from cabinet by opening completely, lifting front approximately 2½", and sliding out until free of cradle assembly.
3. Select the right-hand hangrail. Its profile should match the illustration and will have a “RH” stamped on the short leg.
4. Insert the long leg of hangrail into the slot at the front of drawer. Tilt rear of hangrail upward.
5. Insert the short leg of hangrail into tabs at rear of drawer.
6. Push down on rear of hangrail until the short leg touches the drawer bottom.
7. Repeat procedure for left-hand hangrail.
8. Reinstall drawer by lowering rear of drawer into cradle assembly and sliding drawer closed. Carefully slide drawer open to verify drawer slides freely and drawer stop operates properly.
9. Reload drawer.

INSTALLATION INSTRUCTIONS