


Slim USB 3.0 to DisplayPort Adapter - 2048 x 1152 and 1080p

Product ID: USB32DPES



This slim USB 3.0 to DisplayPort adapter turns a USB 3.0 port into a DP output. The adapter minimizes clutter with a slim, space-saving design that seamlessly blends with your video cable, making it perfect for multi-monitor applications on Ultrabook™, laptop, or desktop computers.

The USB to DisplayPort adapter supports resolutions up to 2048 x 1152 and is also compatible with lower-resolution displays supporting 1920x1200 or 1080p.

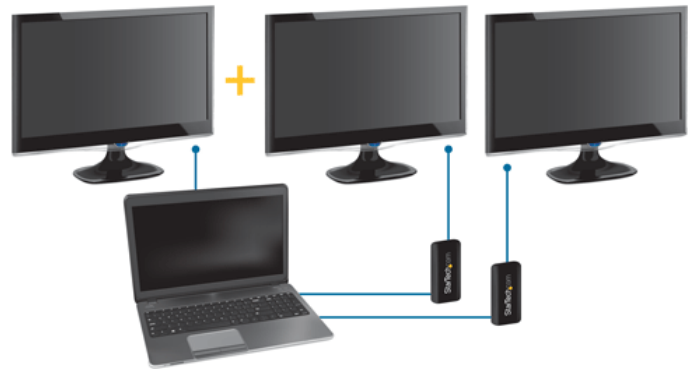

Increase your productivity

With multiple monitors connected to your laptop or desktop computer, you can boost your productivity because you have more screen space to work from.

Functioning as an external graphics card, this USB to DP adapter offers a convenient way to increase your productivity by adding multi-monitor capability to your USB 3.0-enabled desktop or laptop computer (optimal performance from USB 3.0, backward compatible with USB 2.0).

Reduce workspace clutter

This ultra-slim USB to DisplayPort adapter features a lightweight design with a small footprint that blends seamlessly into your monitor cable for a tidy professional workspace.

Its compact design also ensures the adapter will fit easily into your laptop carrying bag, making it the perfect travel companion to work with your Bring Your Own Device (BYOD) hot-desk.

Enjoy smooth performance

Leveraging the high-bandwidth (5 Gbps) SuperSpeed USB 3.0 interface, the adapter delivers smooth, high-definition content to your DisplayPort monitor. The adapter makes it easy to mirror your primary desktop, showing the same image on each display, or to extend your desktop to double your workspace.

The USB32DPES is backed by a StarTech.com 2-year warranty and free lifetime technical support.

Recommended System Requirements:

CPU: Quad-core 2.4GHz or higher (Intel® Core™ i5 recommended)

RAM: 4GB or higher

USB 3.0 port (backward compatible with USB 2.0)

Note: This adapter will not output digitally encrypted content

Certifications, Reports and Compatibility



Applications

- Add a secondary DisplayPort monitor, with full HD capability, to your desktop or laptop computer
- View large spreadsheets or multiple documents simultaneously, across several displays
- View pictures and videos stored on your computer, on a DisplayPort equipped projector or display
- Use your USB 3.0 enabled computer to deliver engaging, multi-monitor presentations
- Reference material from a secondary display while working on another document on your primary display
- Run multiple applications on different screens - check your e-mail on one display and search the Web on the other

Features

- Minimizes clutter, with a slim design that blends seamlessly with your video cable
- Easy to carry, with an ultra-portable, lightweight design and a small footprint
- Delivers smooth, high-definition video content on an extra display, using your high-bandwidth USB 3.0 connection
- Supports HD video resolutions up to 2048 x 1152, also compatible with 1920x1200 or 1080p displays
- USB powered - No external power adapter required
- Supports mirrored, extended or primary display configurations
- Supports display rotation

Hardware	Warranty	2 Years
	Audio	Yes
	AV Input	USB 3.0
	AV Output	DisplayPort
	Chipset ID	Trigger - T5-302
	Memory	32MB
	USB Pass-Through	No
Performance	Audio Specifications	2-Channel Stereo (48Khz)
	General Specifications	This USB video adapter uses a Trigger family chipset. If you're connecting this device to a computer along with additional USB video adapters or docking stations, please avoid using devices with a DisplayLink or Fresco family chipset.
	Maximum Digital Resolutions	2048 x 1152
	Supported Resolutions	Widescreen(16/32 bit): 2048 x 1152, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 900, 1440 x 900, 1360 x 768, 1280 x 800, 1280 x 768, 1280 x 720 Standard(16/32 bit): 1600 x 1200, 1400 x 1050, 1280 x 1024, 1280 x 960, 1152 x 864, 1024 x 768, 800 x 600
	Wide Screen Supported	Yes
Connector(s)	Connector A	1 - USB Type-A (9 pin) USB 3.0 Male Input
	Connector B	1 - DisplayPort (20 pin) Female Output
Software	Microsoft WHQL Certified	Yes
	OS Compatibility	Windows® 10 (32/64) Windows 8 / 8.1 (32/64) Windows 7(32/64) Windows Vista (32/64) Windows XP (32/64)
Special Notes / Requirements	Note	This USB video adapter uses a Trigger family chipset. If you're connecting this device to a computer along with additional USB video adapters or docking stations, avoid using devices with different family chipsets, such as DisplayLink® or Fresco Logic® Connect a maximum of five USB video adapters on a single computer. Support for multiple adapters will vary depending upon your system resources

		This USB video adapter is not intended for graphical intensive applications, such as gaming
System and Cable Requirements		System Processor: Quad Core 2.4GHz (i5 recommended) System Memory: 4GB
Power	Power Source	USB-Powered
Environmental	Humidity	< 85% non-condensing
	Operating Temperature	0°C to 50°C (32°F to 122°F)
	Storage Temperature	-10°C to 75°C (14°F to 167°F)
Physical Characteristics	Cable Length	2.4 in [62 mm]
	Color	Black
	Enclosure Type	Plastic
	Product Height	7.7 in [195 mm]
	Product Length	3.5 in [88 mm]
	Product Weight	1.5 oz [43 g]
Packaging Information	Product Width	0.6 in [14 mm]
	Package Height	1.5 in [38 mm]
	Package Length	8.3 in [210 mm]
	Package Width	5.7 in [145 mm]
What's in the Box	Shipping (Package) Weight	6 oz [170 g]
	Included in Package	1 - USB 3.0 to DisplayPort video adapter 1 - Quick install guide

Product appearance and specifications are subject to change without notice.