



PN 901250

UPC 7 84090 03897 5

USB 3.0 & USB-C Dual Display 4K Power Delivery Docking Station

Key Features:

- Universal Compatibility for USB 3.0, USB-C and Thunderbolt™ 3
- Supports up to 2 external displays
- 4x SuperSpeed USB 3.0 Ports
- 3x USB-C Ports (1 to System w/Power Delivery)
- 2x DisplayPort
- 2x HDMI
- 1x 3.5mm Audio 2.0 Headphone Out Port
- 1x 3.5mm Audio 2.0 Mic In Port
- RJ45 Gigabit Ethernet Port
- Power Delivery up to 60W
- Kensington™ Security Lock Slot
- Enterprise Features
 - Wake on LAN
 - MAC Address Pass-Through
 - PXE Boot


The VisionTek Dual Display 4K Docking Station with Power Delivery enables you to easily connect to your Windows™, Mac™ or Chrome™ laptop to dual 4K displays and up to eight peripherals. The VT4500 is designed to instantly connect and disconnect from your laptop through a single high-speed cable.

- Universal Compatibility – Windows™, Mac™ or Chrome™ the VT4500 is compatible with USB 3.0, USB-C and Thunderbolt™ 3 systems, making this an ideal docking station for mixed system environments. The VT4500 comes with both USB Type-A to C and USB Type-C to C cables for ease of compatibility and setup.
- Connect Two External Displays – Increase productivity by expanding your workspace with up to two additional displays. DP 1.2 supports resolutions up to 4096 x 2160 @60Hz. Includes display support for HBR2(5.4GHz) that is backwards compatible with HBR(2.7GHz). (Single 5K DP++, up to 5120 x 2880 @60Hz.)
- Power Delivery - Charge your compatible USB-C laptop with up to 60W of Power Delivery.
- 11-in-1 Dock with 6 USB Ports – The VT4500 was designed for compatibility by including many of the most commonly needed ports in one dock.
 - 1x USB 3.1 Type-C Gen 2 port connects to your system with either of the included cables - 1 USB 3.0 Type-A to USB 3.1 Type-C and 1 USB 3.1 Type-C to USB 3.1 Type-C.
 - 2x DP and 2x HDMI ports let you connect up to two external displays to increase your system workspace. Up to 4 Displays can be supported with the VT70 (sold separately) plugged into USB ports of the dock.
 - 4x USB 3.0 ports let you connect external storage, full size keyboard and mouse, or mobile devices while supporting data transfer rates of up to 5Gbps.
 - 2x USB 3.1 Type-C Gen 1 ports for connecting external storage or mobile devices supporting transfer rates of up to 5Gbps.
 - 1x 3.5mm Stereo Audio Line-Out port for headphones and 3.5mm Line-In port for a microphone, allowing for video conference communication and music listening.
 - 1x RJ45 Ethernet with 10/100/1000 Mbps support keeps you wired to the internet, avoiding Wi-Fi connection issues or security concerns.



Part Number: 901250 | UPC Code: 7 84090 03897 5


Front

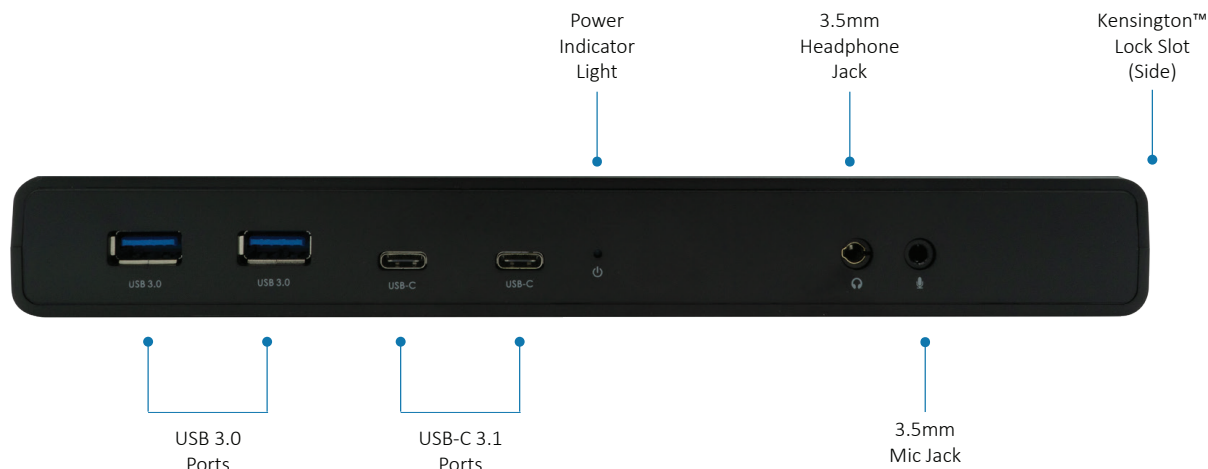

Side



Back

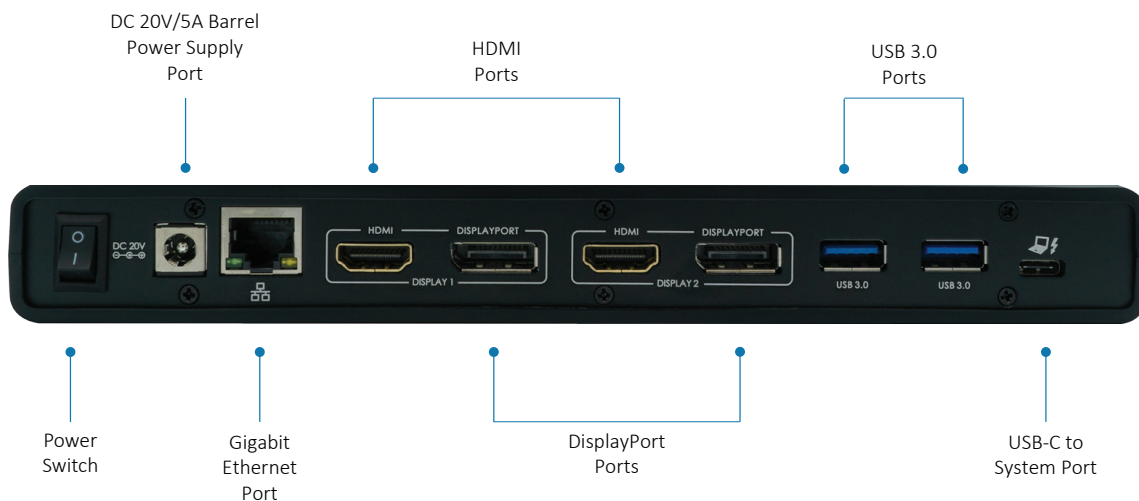

System Requirements

Operating Systems Supported	Windows™ 10, 8.1, 7 MacOS™ 10.14 and later
System Resource Requirement	System with USB 3.0/3.1 Type-A or System with USB 3.0/3.1 Type-C (Power Delivery requires Type-C PD Support)

Dock to System Connection

Dock Connector	USB 3.0 Type A, USB 3.1 Type C Gen 1 or TB3 (Power Delivery only through USB-C or TB3)
----------------	---

Video Connections

Single Display	DisplayPort: Up to 4096 x 2160 @60Hz DisplayPort DP++: Up to 5120 x 2880 @60Hz HDMI: Up to 4096 x 2160 @60Hz
Dual Display	DisplayPort: Up to 4096 x 2160 @60Hz HDMI: Up to 4096 x 2160 @60Hz
Supported Technology	HBR2 (5.4GHz) - backwards compatible with HBR (2.7GHz) (HBR = Hi-Bit Rate)

USB Connections

Front	2x USB-A 3.0 Ports 2x USB-C 3.1 Ports
Back	2x USB-A 3.0 Ports 1x USB-C 3.1 Port (To System Connection)

Additional Ports

Security	Kensington™ Security Lock Slot (Side)
----------	---------------------------------------

Network Connections

Ethernet Port	RJ45
Compatible Ethernet Speed	10/100/1000 Mbps

Audio Connections

Audio Connectors	3.5mm Audio 2.0 Line-Out port - Front 3.5mm Line-In port - Front
Audio Channels Supported	Stereo LR

Power and Environmental

Power	DC20V/5A Power Adapter
Operating Temperature	0 to 40° C (32 to 104° F)
Storage Temperature	-10 to 70° C (14 to 158° F)
Relative Humidity	10% to 90% non-condensing - Operational 10% to 90% non-condensing - Storage

Technology Information

Integrated Chip Sets (IC)	DisplayLink™ DL-6950
---------------------------	----------------------

Part Number: 901250 | UPC Code: 7 84090 03897 5

Dock
Specifications

Product Dimensions

Product Dimensions	Length: 8.75" (223mm) Depth: 3.32" (85mm) Height: 1.13" (29mm)
Product Weight	11.8oz (335g)
Included Cable Length	3 feet (1M)
Product Color and Material	Black ABS

Packaging Dimensions

Packaging Style	Retail Box
Packaging Specifications	Length: 10.5" (267mm) Depth: 5.32" (135mm) Height: 4.07" (104mm) Weight: 2 lbs 14.1oz (6750g)
Master Carton	10 pcs
Individual Package Contents	1x VT4500 Dock 1x DC20V Certified Power Adapter 1x USB-C 3.0 to USB-C 3.0 Cable 1x USB-A 3.0 to USB-C 3.0 Cable 1x Software Installation CD 1x User Manual

Country of Origin and Warranty Information

Country of Origin	China
Certifications and Compliance	CE, FCC, RoHS, DP 1.2 Certified, USB-C Certified
Warranty	2-Year Limited

Additional Features

Security	Kensington™ Security Lock Slot
----------	--------------------------------

Compatible Recommendations

Cables	VisionTek DP to DP 2M Cable - PN 901211 VisionTek HDMI Pivot Cable 3ft - PN 900811 VisionTek HDMI High Speed 6ft Cable - PN 901214
External Storage	VisionTek 1TB XT USB 3.0 Pocket SSD - PN 901196

All specification are subject to change without notice. Products may not be available in all markets.
The VisionTek name and design are registered trademarks of VisionTek Products, LLC. All other registered
and unregistered trademarks are the property of their respective owners.

FOR MORE INFORMATION CONTACT: 1-866-883-5411 | sales@visiontek.com