



markem·imaje

a DOVER company



Continuous inkjet 9750: The true value of innovation



The innovation you need. The experience you trust.

Markem-Imaje delivers flexibility and stability with our next-generation model, the 9750. Backed by four-plus decades of building dependable inkjet printers, the breakthrough 9750 incorporates the best of past, present and future-proof improvements so you can adapt easily to changing marketplace needs.

Meticulously engineered and qualified by the most modern methods, the 9750's latest enhancements bring you:

- Technology leaps grounded in time-tested industrial processes for maximized uptime, reduced maintenance
- Cutting-edge design with simplified UI and modular components for easy operation, maintenance or repair
- Clear, customizable, traceable codes that meet customers' growing demand for supply chain visibility

Key benefits

Innovation

Advanced R&D backed by proven industrial processes and methods

- **Intelli'Inks** system ensures optimal coder performance and flexibility when coding different package materials.
- **Intelli'Swap** technology streamlines mechanicals down to swappable modules.
- **Jet Speed Control** technology automatically adjusts ink and printer variables to ensure drop placement, quality and code consistence. Every time.

Sustainability

More sustainable solutions = Long-term value and lower TCO


- **Intelli'Swap** modularity enables you swap out only the individual parts that need to be replaced and not the entire block
- **Intelli'Design** process and a portfolio of rigorously developed ink formulations help reduce consumable consumption and VOC emissions by up to 50% while improving operator safety, well-being and TCO
- Consumable-saving mode additionally reduces consumption and waste

Digitalization

Convenience only a couple clicks away

- Remote services, including remote diagnostics, allow for a predictive analysis and therefore help maximize uptime, achieve OEE objectives
- Consumable and spare part supply through online portal
- Quick customizable 24-pin interface allows for easy integration in a 4.0 connected environment

9750 continuous inkjet specifications

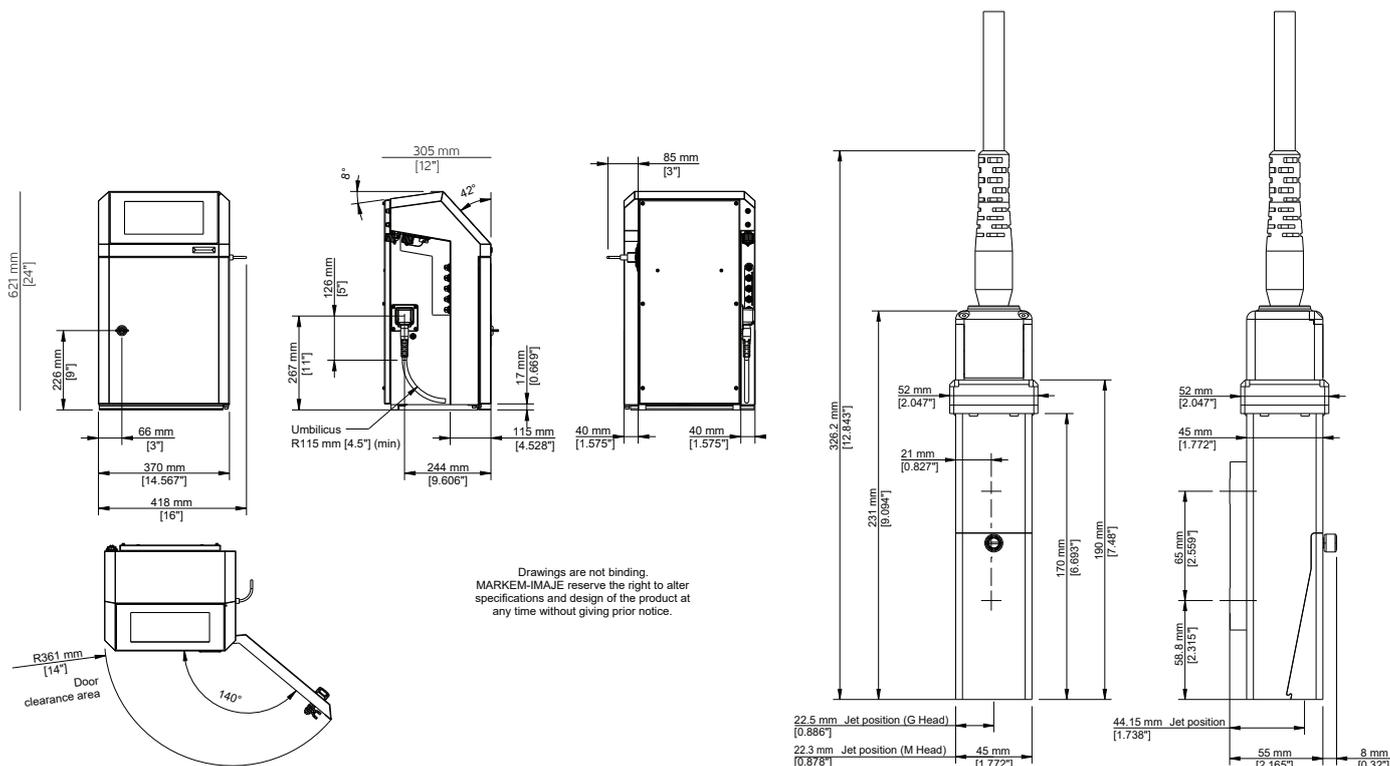

Print features

Mono-jet printhead
 G head (printing resolution: 71 dpi)
 M head (printing resolution: 115 dpi)
 Up to 5 lines of print
 Print speed: up to 6.6 m/s
 Font height from 5 to 32 dots
 Character height: from 1.2 to 11.2 mm
 Wide choice of 1D and 2D barcodes: EAN 8/EAN 13/
 UPCA /UPCE barcodes, code 39, interleaved 2
 of 5, Datamatrix, QRcode, Dotcode
 Wide choice of characters: Latin, Arabic, Cyrillic,
 Hebrew, Japanese, Chinese, Korean, etc.

Other characteristics

Weight: 25 kg
 Table-top or vertical mounting
 Ultra-flexible 3-meter umbilical cable
 Stainless steel cabinet and printhead case
 Dust/water ingress protection rating: IP56 requiring
 no plant air
 Operating temperature range: 32 °F to 122 °F
 (0 °C to 50 °C) depending on ink used
 Humidity: 10 to 90% non-condensing
 Electrical power supply: 100-240 V; 1,6 A;
 frequency 50/60 Hz

Operations

WYSIWYG 10-inch capacitive color touchscreen: real-
 time display of remaining print capacity expressed
 in hours and number of messages; integrated
 assistance and alert system; simplified message
 printing and management; creation of user profiles;
 tracking of consumption and printer availability
 Message library (up to 1,000 messages)
 Automatic selection of fonts, depending on print
 speed and printhead/object distance
 Specific date management (rounding date function)
 Parent/child connectivity
 Jet Speed Control guarantees marking quality
 Printhead with embedded intelligence for high
 marking quality and reduced maintenance
 Broad range of inks: multi-use, high performance;
 alcohol based, ketone-free and MEK-free inks
 Sealed 0.8-liter cartridges with fool proofing system
 Compact and modular ink circuit for better thermal
 management and controlled additive consumption
 100% front access modular ink circuit for a
 simplified preventive maintenance
 Remote Services including our Virtual Assistant for
 24/7 self-troubleshooting and "how to" videos
 Quick connect/disconnect of accessories (photocell,
 alarm and encoder)
 Enhanced native connectivity including USB, Ethernet,
 serial and a configurable M12 connector for I/O

Options

Ultra-flexible 6-meter umbilical cable
 IP66 protection (plant air required)
 TCO option for lower additive consumption:
 at 20 °C less than 3,5 cc/h for MEK-based ink or
 less than 2cc/h for MEK-free ink
 Printhead pressurization kit
 Many I/O possibilities including a configurable single
 point connector (24 pins)

Accessories

Wide range of accessories
 Printer supports: stands (stainless steel or
 aluminum), table or wall mounting brackets
 Printhead supports: stand (stainless steel) and choice
 of brackets
 Photocells
 Encoders
 Alarm beacons (24 V)
 Set of pre-cabled connectors M12, Ethernet IP66

Software

Fully compatible with CoLOS® Version 6.3 Service
 Pack onwards

Logo creation with CoLOS® Graphics software

Remote services

Our intelligent self-support solution. Live helpdesk
 support with remote video capabilities.

Connected Devices Services, based on a secured IoT
 cloud infrastructure*

* check availability in your country

DOVERCO
 Strategic. Packaging.

68 Brunswick Blvd, Dollard-des-Ormeaux, QC, H9B 2L3
 Tel: (514) 420-6060 • Fax: (514) 420-6015

4 Paget Road, Unit 6, Brampton, ON, L6T 5G3
 Tel: (289) 256-2141 • Fax: (289) 256-2142

Toll Free: 1-800-363-0697 • www.doverco.ca • web.sales@doverco.ca

We reserve the right to amend the design and/or specifications of our products without notice.
 © 2023 Markem-Imaje, a Dover Company. MARKEM-IMAJE and the MI MARKEM-IMAJE Logo, CoLOS are registered trademarks
 of Dover Europe Sàrl in the United States, the European Union and various other countries. Photos: ginko-photo.com - B1 10116664