


Daggerboard trunk has to be set first, before any 2x2 seat support rails are installed in the hull. See previous page.

Beam spreader 2x2 can be used to align/epoxy DB trunk

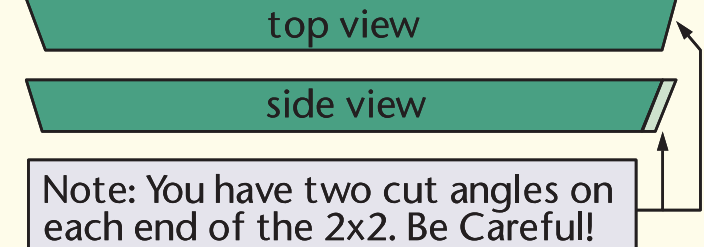

Long side is Aft on both center seat 2x2's

Note: The long side of the 2x2 is on the forward side of the stern seat support rails!

The center seat supports are mounted first

Note: The long side of the 2x2 is on the aft side of the bow seat support rails!

Note: read this!

42 5/8"

47 3/4"

51 7/8"

50 11/16"

40 7/8"

33 1/8"

Note: these are the measurements off the prototype hull. Your hull will be different!

Epoxy and screw square of 1/4" ply to end of 2x2 on excessive gaps. It looks bad, but it works, and will be covered on all sides by plywood for strength.



Note: Cutting the notch and trimming the ends of the 2x2's for the center seat, can be problematic. Take your time, and try not to make bad cuts. Measure 3 times cut 1