


# AIR-POWERED

## EDGE-OF-DOCK SPECIFICATIONS

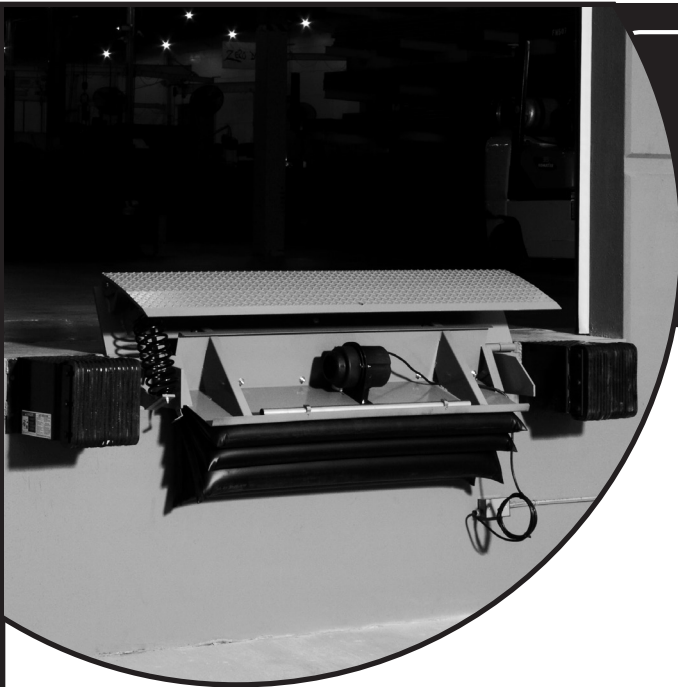

### Design Highlights

- Push-button operation eliminates manual lifting
- Patented high volume, low pressure air bag lift system
- Lift system fully operational under extreme temperatures of -65 to 180 F (-53 to 82 C)
- Exclusive Lug Style Lip Hinge provides superior strength and extended life
- High Strength Steel Tread Plate (Ramp & Lip)
- Robotic Welding for improved strength, quality and consistency
- Operating Range is 5" (127 mm) above to 5" (127 mm) below dock
- Effective Working Range is 3" (76.2 mm) above to 3" (76.2 mm) below dock
- Lower Profile Design reduces interference with material handling equipment
- Beveled Lip Edge (11 degrees) provides smooth interface with trailers
- 15" (381 mm) Lip Standard (Optional 17" (432 mm) lip available for refrigerated trailers)
- Tire Laminated Bumpers mounted to steel bumper blocks
- Exclusive EZ-Hang™ installation system simplifies install
- Integral Maintenance / Service Strut

### Project Information

Job Name \_\_\_\_\_

Address \_\_\_\_\_

General Contractor \_\_\_\_\_

Distributor \_\_\_\_\_

Model \_\_\_\_\_ Quantity \_\_\_\_\_

### Certified For Construction

By \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

Date \_\_\_\_\_

### Available Options

- 17" (432 mm) Lip for refrigerated trailers
- Post Office Model with 2" (51 mm) cart guard
- Steel faced bumpers
- Tapered Lip (tapered on each side)
- Recessed Pit Model
- Special Surface Finish
- Bumper Projection 16", 17" or 18"  
(406, 432 or 457 mm) \_\_\_\_\_

### Accessories

- Embed Channel or Transition Steel: \_\_\_\_\_
- Vehicle Restraint – Model: \_\_\_\_\_
- Dock Seal or Shelter – Model: \_\_\_\_\_
- Other: \_\_\_\_\_



# AIR-POWERED

## EDGE-OF-DOCK SPECIFICATIONS




- General:** Unit meets or exceeds MH14.1-1987 performance requirements.
- Construction:** Deck and lip to be 3/8" (9.52 mm) to 1/2" (12.7 mm) thick (depending upon capacity) high tensile steel tread plate. Conforms to ANSI/MH14.1 1987 performance requirements. Self-cleaning lug-style front lip hinge with heavy-duty lugs robotically welded to ramp assembly. Ramp assembly projects 13" (330 mm) from dock in the stored position and the standard lip length is 15" (381 mm).
- Lifting System:** High volume, low pressure air bag constructed of heavy-duty PVC coated vinyl material that is RF welded in order to avoid any stitching. Capable of operating if punctured and able to withstand temperatures of -65 to 180 F (-53 to 82C).
- Electrical:** 12 amp fan with two-stage single speed, self-cleaning filter, UL approved motor. Runs off 115 volt single-phase electrical power. Includes NEMA 4 single button control panel.
- Bumpers:** Unit to include two 4"x10"x12" (101mm x 254mm x 305mm) tire laminated bumpers mounted to steel block assemblies. Bumper projections available in 16", 17" and 18" (406, 432 & 457 mm). See chart below for bumper projections.
- Working Range:** Operating range is 5" (127 mm) above to 5" (127 mm) below dock level. Effective working range is 3" (76.2 mm) above and 3" (76.2 mm) below dock level\*
- Operation:** Constant contact push button operation with lip automatically extending. The unit can be stored by again by pushing the button to remove the lip from the trailer.
- Installation:** Unit ships completely assembled for easy installation. Unit to be securely welded to a channel (8" (203 mm) minimum) embedded in concrete and secured with anchoring hooks as recommended. Instructions are defined in the product's Owner's Manual.

NOMINAL DIMENSIONS			
MODEL	WIDTH	LENGTH	CAPACITY
SA6620	66" (1676 mm)	27" (686 mm)	20,000 lbs. (9091 Kg)
SA6630	66" (1676 mm)	27" (686 mm)	30,000 lbs. (13,636 Kg)
SA7220	72" (1829 mm)	27" (686 mm)	20,000 lbs. (9091 Kg)
SA7230	72" (1829 mm)	27" (686 mm)	30,000 lbs. (13,636 Kg)
SA7830	78" (1981 mm)	27" (686 mm)	30,000 lbs. (13,636 Kg)
SA8430	84" (2134 mm)	27" (686 mm)	30,000 lbs. (13,636 Kg)


- Limited Warranty:** Warranted against defects in materials and workmanship for one year.

\* Due to the limited length of EOD levelers, its structure is subjected to greater dynamic load than with longer levelers. Capacity selection is based on ideal operating conditions (i.e. maximum gross load traveling at 3 m.p.h. on 10% grade or less); if the application exceeds this condition a higher capacity leveler must be selected.

### Channel and Anchor Detail

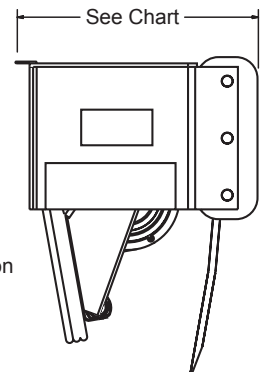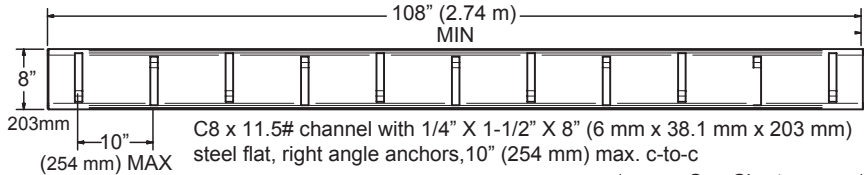

A	B
66" (1.68 m)	98" (2.49 m)
72" (1.83 m)	104" (2.64 m)
78" (1.98 m)	110" (2.80 m)
84" (2.13 m)	116" (2.95 m)

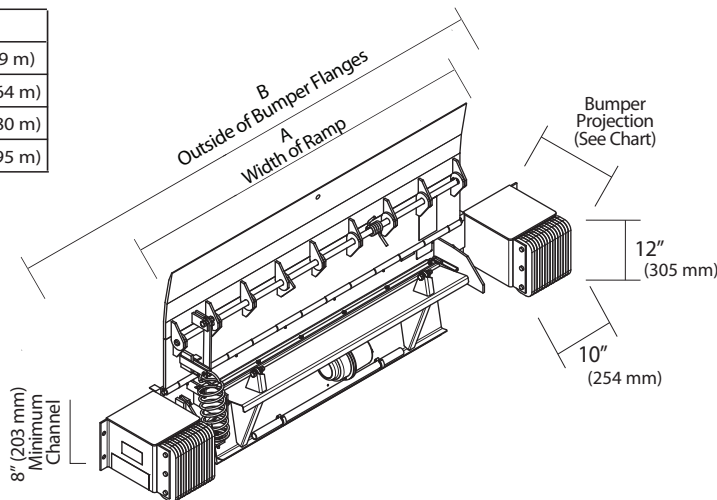

BUMPER PROJECTIONS		
LIP LENGTH	CROWN	PROJECTION
15" (381 mm)	5°	16" (406 mm)
15" (381 mm)	8°	16" (406 mm)
17" (432 mm)	2.5°	18" (457 mm)
17" (432 mm)	5°	17" (432 mm)
17" (432 mm)	8°	16" (406 mm)

**SERCO**