



FOAM DOCK SEAL WITH ADJUSTABLE HEAD PAD DOCK SEAL SPECIFICATIONS

MODEL S-800

The Serco S-800 Adjustable Head Pad Dock Seal can be manually positioned within 48" range and is an excellent choice for tight sealing for a full range of trailer heights.



Design Highlights

- Adjustable Head Pad System Operates Utilizing an Easy-release Lever.
- Roll-formed Galvanized Steel Framing Warranted for 5 Years Against Rotting, Splitting or Cracking.
- Adjustable Spring-tension System Provides for Adjustment of Counterbalance and Horizontal Tilt for Smooth, Jam-free Operation.
- 18" High Foam Head Pad is Mounted on a Steel Pan Which Travels in Slide Tracks.
- Highly Resilient, Open-celled Polyurethane Foam Keeps Original Shape and Compresses Easily to Extend Seal Life.
- All Pads are Vented for Air and Moisture Release.
- Full Length Yellow Stripes Guide Drivers to the Dock.

Project Information

Job Name _____
Address _____
General Contractor _____
Distributor _____
Model _____ Quantity _____

Certified For Construction

By _____
Company _____
Address _____
Date _____



FOAM DOCK SEAL WITH ADJUSTABLE HEAD PAD DOCK SEAL SPECIFICATIONS



MODEL S-800

APPLICATION DATA

Door Width: _____ ft. _____ in.
 Door Height: _____ ft. _____ in.
 Dock Height: _____ ft. _____ in.
 Bumper Protection*: _____ in.
 (*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.
 Height: _____ Max. _____ Min.
 Length: _____ Max. _____ Min.
 Hydraulic Tailgate: Yes No
 Rear Step Section: Yes No
 Tailgate/Step Section Size: _____ In.
 Yard Jockeys: Yes No

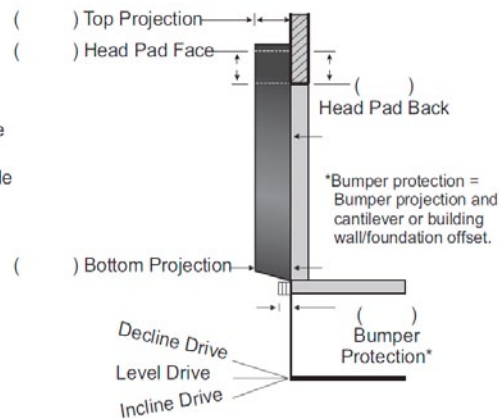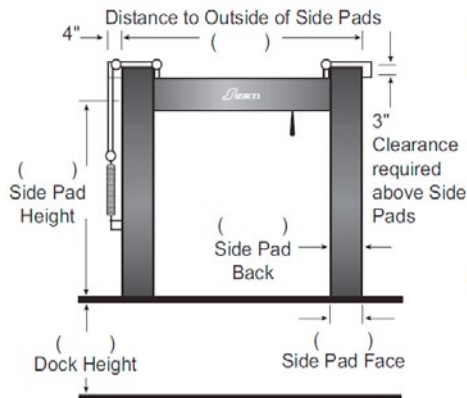

Drive/Approach Level Incline Decline _____ % Grade

- QUANTITY** _____ Unit Width _____"
- Head Pad Back/Face** 18/18 24/24 12/18
- Follower Curtain** None 36" Standard _____"
- Side Pad Height** _____"
- Side Pad Back/Face** 6/10 8/12 10/12 12/12 12/15 8/15 6/14 10/18 8/23
- Base Material** 22oz Vinyl 40 oz. Vinyl 40 oz. CSM XL-100™
- Color** Black Tan Brown Blue Green
- Taper** Yes No
- Top Projection** 10" 12" 14" 16" 18" 20" 22" _____"
- Bottom Projection** 10" 12" 14" 16" 18" 20" 22" _____"
- Wear Pleats** None 4" 8" 16"
 22 oz. Vinyl 40 oz. Vinyl 40 oz. CSM XL-100™
 Black Tan Brown Blue Green
- Wear Face** None Head Pad Side Pad
 22 oz. Vinyl 40 oz. Vinyl 40 oz. CSM XL-100™
 Black Tan Brown Blue Green
- Reinforced Inside Face** None Side Pad 4" Side Full Height
 22 oz. Vinyl 40 oz. Vinyl 40 oz. CSM XL-100™ Black Tan Brown Blue Green
- Options** Bottom Flap Size: 3" 6" _____" Bottom Flap Location: Inside Inside Front All Sides
 Door Numbers 24" Guide Stripes Flame Retardant Fabric Flame Retardant Foam
- Mounting Brackets** Flats & Angles Angles
 1 1/2" Offsets & Angles

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

*Note: Consult factory for blackout application assistance.

