





220/225/230/235/240/245/250PX

Preliminary Version



Key Features

- Quick and easy to install dramatically reduces installation time
- Lower system costs can cut rooftop installation costs in half
- Aesthetic seamless appearance low profile with auto leveling and alignment
- Built-in hyper-bonded grounding system if it's mounted, it's grounded
- Theft resistant hardware
- Ultra-low parts count 3 parts for the mounting and grounding system
- 6 years product warranty (materials and workmanship); 25 years module power output warranty
- Industry leading PLUS ONLY power tolerance: +5W (+2.0%)
- · Backward compatibility with all standard rooftop and ground mounting systems



Next Generation Solar Module

NewEdge, the next generation module designed for multiple types of mounting systems, offers customers the added value of minimal system costs, aesthetic seamless appearance, auto grounding and theft resistance.

The CS6P-PX is a robust 60 cell solar module incorporating the groundbreaking Zep Compatible frame. The specially designed frame allows for rail-free, fast installation with the industry's most reliable grounding system. The CS6P-PX is the perfect choice for customers who are looking for a high quality, aesthetic module with the lowest system costs.

Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Quality Certificates

- UL 1703(pending), CE
- ISO9001:2008: Standards for quality management systems
- ISO/TS16949:2009: The automotive quality management system
- QC080000 HSPM: The Certification for Hazardous Substances Regulations









www.canadiansolar.com

Electrical Data


Electrical Data							
		CS6P-225PX	CS6P-230PX	CS6P-235PX	CS6P-240PX	CS6P-245PX	CS6P-250PX
STC (Pmax)	220W	225W	230W	235W	240W	245W	250W
(Vmp)	29.2V	29.4V	29.6V	29.8V	29.9V	30.0V	30.1V
(lmp)	7.53A	7.65A	7.78A	7.90A	8.03A	8.17A	8.30A
	36.6V	36.7V	36.8V	36.9V	37.0V	37.1V	37.2V
	8.09A	8.19A	8.34A	8.46A	8.59A	8.74A	8.87A
	-40°C~+85°C						
	600V (UL)						
]	15A						
				+5W			
Pmax	-0.43%/°C						
Voc	-0.34 %fC 0.065 %fC						
Isc							
NOCT	45 ℃						
	Pmax Voc Isc	STC (Pmax) 220W (Vmp) 29.2V (Imp) 7.53A 36.6V 8.09A	STC (Pmax) 220W 225W (Vmp) 29.2V 29.4V (Imp) 7.53A 7.65A 36.6V 36.7V 8.09A 8.19A	STC (Pmax) 220W 225W 230W (Vmp) 29.2V 29.4V 29.6V (Imp) 7.53A 7.65A 7.78A 36.6V 36.7V 36.8V 8.09A 8.19A 8.34A	STC (Pmax) 220W 225W 230W 235W (Vmp) 29.2V 29.4V 29.6V 29.8V (Imp) 7.53A 7.65A 7.78A 7.90A 36.6V 36.7V 36.8V 36.9V 8.09A 8.19A 8.34A 8.46A -40°C~+85°C 600V (UL) 15A +5W Pmax -0.43%/°C lsc 0.065 %/°C	STC (Pmax) 220W 225W 230W 235W 240W (Vmp) 29.2V 29.4V 29.6V 29.8V 29.9V (Imp) 7.53A 7.65A 7.78A 7.90A 8.03A 36.6V 36.7V 36.8V 36.9V 37.0V 8.09A 8.19A 8.34A 8.46A 8.59A -40°C~+85°C 600V (UL) 15A +5W Pmax -0.43%/℃ Voc 1sc 0.065 %/℃	(Vmp) 29.2V 29.4V 29.6V 29.8V 29.9V 30.0V (Imp) 7.53A 7.65A 7.78A 7.90A 8.03A 8.17A 36.6V 36.7V 36.8V 36.9V 37.0V 37.1V 8.09A 8.19A 8.34A 8.46A 8.59A 8.74A -40°C~+85°C 600V (UL) 15A +5W Pmax -0.43%/C Voc -0.34 %/C Isc 0.065 %/C

^{*}Under Standard Test Conditions (STC) of irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25°C


Mechanical Data

Cell Type	Poly-crystalline			
Cell Arrangement	60 (6 x 10)			
Dimensions	1638 x 982 x 40mm (64.5 x 38.7 x 1.57in)			
Weight	20kg (44.1 lbs)			
Front Cover	Tempered glass			
Frame Material	Anodized aluminium alloy			
Standard Packaging (Modules per Pallet)	20pcs			

Engineering Drawings

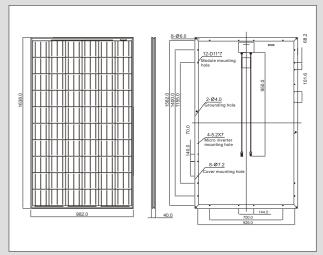

I-V Curves (CS6P-250PX)

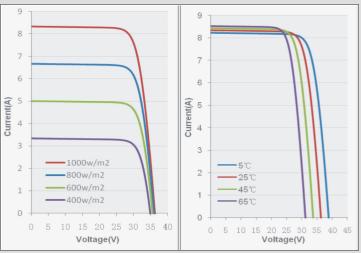

^{*}Specifications included in this datasheet are subject to change without prior notice.

About Canadian Solar

Canadian Solar Inc. is one of the world's largest solar companies. As a leading vertically-integrated manufacturer of ingots, wafers, cells, solar modules and solar systems. Canadian Solar delivers solar power products of uncompromising quality to worldwide customers. Canadian Solar's world class team of professionals works closely with our customers to provide them with solutions for all their solar needs.

For product and purchasing inquiries contact:



Canadian Solar was founded in Canada in 2001 and was successfully listed on NASDAQ Exchange (symbol: CSIQ) in November 2006. In 2009, Canadian Solar's full year shipment was 325.5 MW with a module capacity of 820MW.

USA Office | 12657 Alcosta Blvd, Suite 140 San Ramon | CA 94583 | USA Tel: +1-925-866-2700 Fax: +1-925-866-2704 inquire.us@canadiansolar.com

Headquarters | 650 Riverbend Drive, Suite B Kitchener, Ontario | Canada N2K3S2 Tel:+1-519-954-2057 Fax: +1-519-954-2597 inquire.ca@canadiansolar.com www.canadiansolar.com

EN-Rev 3.1 Copyright © 2010 Canadian